


HEIDENHAIN

SALES & SERVICE:

A Tech Authority, Inc. 13745 Stockton Ave. Chino CA 91710 909-614-4522 sales@atechauthority.com

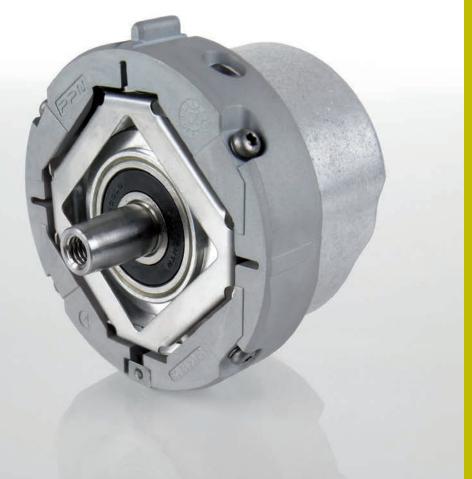


Encoders for Servo Drives

Table of contents


This brochure is not an exhaustive overview of the HEIDENHAIN product program, but rather provides a selection of **encoders designed for use on electric motors.**

The **selection tables** provide an overview of all HEIDENHAIN encoders intended for use on electric motors, along with the most relevant specifications. The descriptions of the **technical features** contain fundamental information on the use of rotary, angular, and linear encoders on electric motors.


The **mounting information** and detailed **specifications** refer to **rotary encoders** developed specifically for servo motors. For information about other rotary encoders, please refer to the appropriate product documentation.



Regarding the **linear encoders and angle encoders** listed in the selection tables, please refer to the respective **product documentation** to find detailed descriptions, including mounting information, specifications, and dimensions.

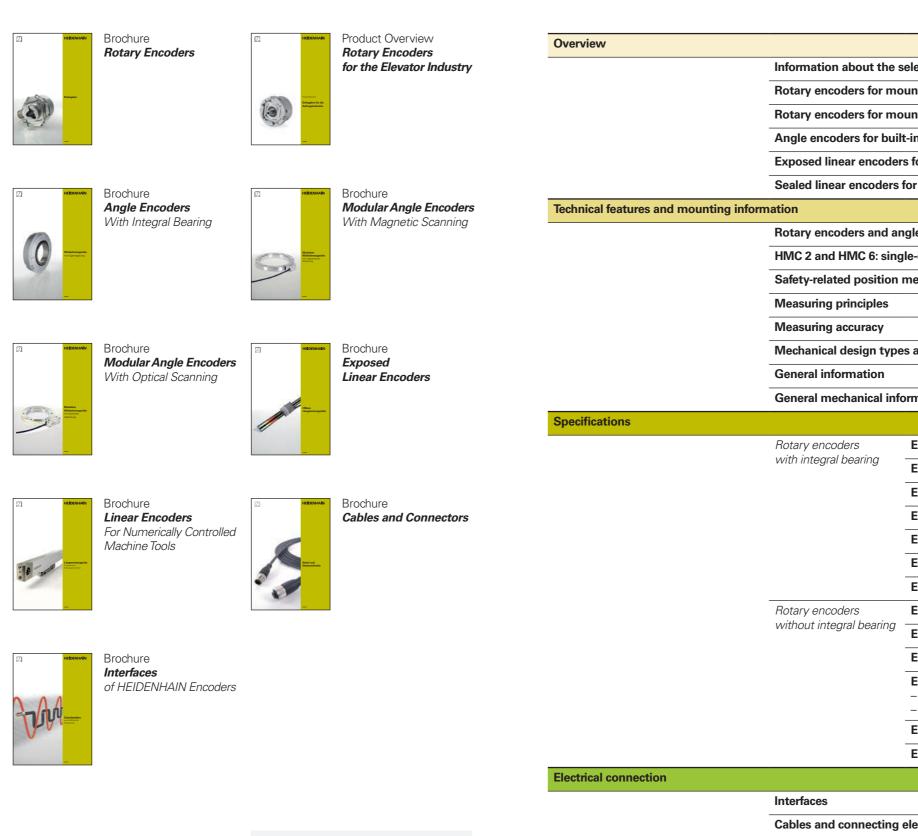

Diagnostics, and inspectio



Detailed descriptions of all available interfaces, as well as general electrical information, can be found in the *Interfaces of HEIDENHAIN Encoders* brochure. This brochure supersedes all previous editions, which thereby become invalid. The basis for ordering from HEIDENHAIN is always the brochure edition and product documentation valid when the order is placed.

Standards (ISO, EN, etc.) apply only where explicitly stated in the brochure.

selection tables	6
ounting inside motors	8
ounting on motors	12
t-in and hollow-shaft motors	18
s for linear motors	20
for linear motors	22
ngle encoders for DC and three-phase AC motors	24
le-cable solutions for drives	26
measuring systems	28
	30
	33
es and mounting	36
	46
ormation	47
ECN/EQN 1100 series	54
ERN 1023	56
ERN 1123	58
ECN/EQN 1300 series	60
ECN/EQN 1300S (DRIVE CLiQ) series	62
ECN/EQN 400 series	64
ERN 1300 series	66
ECI/EBI/EQI 1100 series	68
ECI/EBI/EQI 1300 series	74
ECI/EBI 100 series	80
ECI 4010, EBI 4010, ECI 4090 S – With Ø 90 mm hollow shaft – With Ø 180 mm hollow shaft	82
ERO 1200 series	86
ERO 1400 series	88
	90
elements	104
tion and testing equipment	108


Encoders for electric motors

Controller systems for electric motors require encoders that provide feedback for the position and speed controllers, and for electronic commutation. Encoder attributes have a critical impact on important motor characteristics, such as:


- Positioning accuracy
- Speed stability
- Bandwidth, and therefore command
- and disturbance behavior
- Power dissipation
- Size
- Acoustic noise
- Safety

All of the HEIDENHAIN encoders listed in this brochure have been designed for minimized mounting and cabling effort on the part of the motor manufacturer. Overall rotary motor length can also be kept low. The special design of some encoders can even eliminate the need for safety devices such as limit switches.

Digital position control and speed control

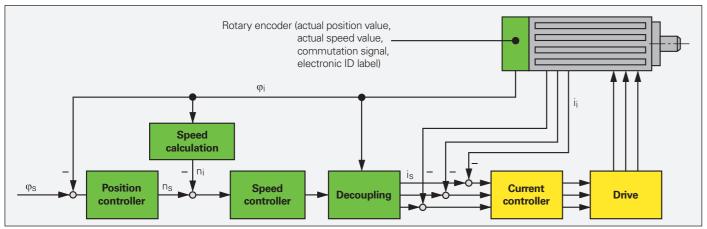

Motor for digital drive systems (digital position and speed control)

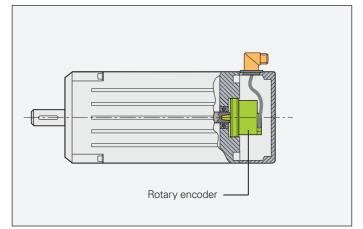

HEIDENHAIN can provide a well-matched solution for rotary and linear motors used in a variety of applications:

- Absolute and incremental rotary encoders with and without commutation tracks
- Absolute and incremental angle encoders
- Absolute and incremental linear encodersAbsolute and incremental modular



Angle encoders



Rotary encoders



Linear encoders

Information about the selection tables

The selection tables on the following pages list the encoders that are suitable for each motor design. Each table contains encoders with different dimensions and output signals for the various motor types (DC or three-phase AC motors).

Rotary encoders for mounting on motors

Rotary encoders for motors with forced ventilation are either mounted on the motor housing or installed within it. These rotary encoders are often exposed to the motor's unfiltered forced-air stream and must therefore possess a high protection class of IP64 or better. The permissible operating temperature seldom exceeds 100 °C.

The selection table contains the following encoders:

- Rotary encoders with mounted stator coupling with high natural frequency—virtually eliminating any limits on the bandwidth of the drive
- Rotary encoders for **separate shaft couplings**, thus particularly well suited for electrically **isolated mounting**
- Absolute rotary encoders with purely digital data transfer or additional sinusoidal TTL or HTL incremental signals

 Incremental rotary encoders with high-quality sinusoidal output signals for digital speed control

- Incremental rotary encoders with TTL or HTL compatible output signals
- Information on functional-safety rotary encoders available as safety-related position measurement systems

For the selection table, see page 12


Rotary encoders for mounting inside motors


In motors without forced ventilation, the rotary encoder is installed inside the motor housing. As a result, the encoder does not require a high protection class. Nevertheless, the operating temperature inside the motor housing can reach 100 °C or more.

The selection table contains the following encoders:

- Absolute rotary encoders for operating temperatures of up to 115 °C and incremental rotary encoders for operating temperatures of up to 120 °C
- Rotary encoders with mounted **stator coupling** with high natural frequency—virtually eliminating any limits on the bandwidth of the drive
- Absolute rotary encoders with purely digital data transmission (suitable for the HMC 6 and HMC 2 single-cable solutions) or additional sinusoidal incremental signals
- Incremental rotary encoders for digital speed control, featuring high-quality sinusoidal output signals, even under high operating temperatures
- Incremental rotary encoders with an additional commutation signal for BLDC motors
- Incremental rotary encoders with TTL-compatible output signals
- Information on functional-safety rotary encoders available as safety-related position measurement systems

For the selection table, see page 8



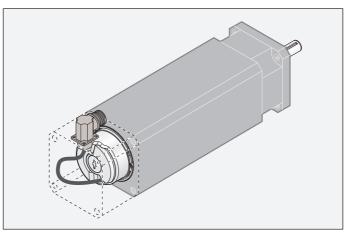

Rotary encoders, modular encoders, and angle encoders for built-in and hollow-shaft motors

The rotary encoders and angle encoders for these motors feature **hollow through shafts**, allowing supply lines to be routed through the hollow shaft of both the motor and the encoder. Depending on the operating conditions, these encoders must either have an IP66 rating or be protected from contamination through the machine design (as with optical modular encoders).

The selection table contains the following encoders:

- Encoders with high-quality absolute and/or incremental output signals
- Angle encoders and modular encoders with the measuring standard on an aluminum or steel drum for shaft speeds of up to 42 000 rpm
- Encoders with integral bearing, with stator coupling or modular design
- Encoders with good acceleration performance for high control-loop bandwidth

For the selection table, see page 18

Linear encoders for linear motors

Linear encoders installed on linear motors provide actual-value feedback for the position and speed controllers. These encoders have a decisive impact on the control characteristics of the linear motor. The linear encoders recommended for this type of application exhibit the following characteristics:

- Low position error during acceleration in the direction of measurement
- High tolerance to acceleration and lateral vibration
- Design suitability for high shaft speeds
- Absolute position information with purely digital data transmission or high-quality sinusoidal incremental signals

Exposed linear encoders are characterized by:

- Higher accuracy grades
- Higher traversing speeds
- Contact-free scanning (i.e., no friction between scanning head and scale)


Exposed linear encoders are suitable for applications in clean environments (e.g., on measuring machines or production equipment in the semiconductor industry).


For the selection table, see page 20

Sealed linear encoders feature the following characteristics:

- High protection class
- Easy mounting

Sealed linear encoders are thus suitable for applications in high-contamination environments (e.g., on machine tools).

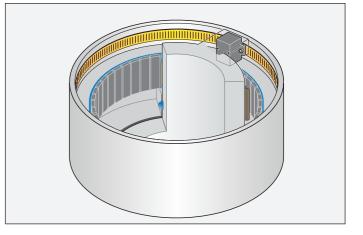

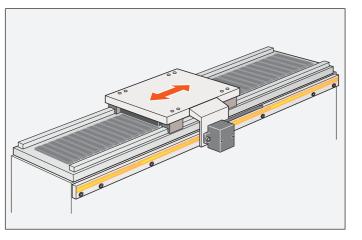

7

Selection guide

Rotary encoders for mounting inside motors

Protection class: up to IP40 (EN 60529)

Series	Main dimensions	Mechanically permissible shaft speed	Natural frequency f_N (typical) of the coupling	Maximum operating temperature	Supply voltage	Signal periods per revolution	Positions per revolution	Distinguishable revolutions	Interface	Model	Further information
Rotary encoders	without integral bearing	-	-	·		I	-	•			
ECI/EQI 1100		≤ 15000 rpm/ ≤ 12000 rpm	-	110 °C	DC 3.6 V to 14 V	-	524288 (19 bits)	-/4096	EnDat 2.2/22	ECI 1119 ¹⁾ /EQI 1131 ¹⁾	Page 68
					DC 4 V to 14 V				EnDat 3/E30-R2		
ECI/EQI 1100 with synchro flange					DC 3.6 V to 14 V				EnDat 2.2/22	_	
ECI/EBI 1100	13 36.83 Ø 6			115 °C			262 144 (18 bits)	-/65536 ³⁾	-	ECI 1118/EBI 1135	Page 72
ECI/EBI/EQI 1300	Ø 74	≤ 15000 rpm/ ≤ 12000 rpm	-	115 °C	DC 3.6 V to 14 V	-	524288 (19 bits)	-/65536/4096 ³⁾	EnDat 2.2/22	ECI 1319 ¹⁾ /EBI 1335 ¹⁾³⁾ / EQI 1331 ¹⁾	Page 74
					DC 4 V to 14 V			-/4096	EnDat 3/E30-R2	ECI 1319 ¹⁾ /EQI 1331 ¹⁾	Page 76
	<u>31</u> Ø 12.7			100 °C	DC 10 V to 28.8 V				DRIVE-CLiQ	ECI 1319S/EQI 1331S ¹⁾	Page 78
ECI/EBI 100		≤ 6000 rpm	-	115 °C	DC 3.6 V to 14 V	32	524288 (19 bits)	-	EnDat 2.1/01 with \frown 1 V _{PP}	ECI 119	Page 80
	D: 30/38/50 mm					-	_	-/65536 ³⁾	EnDat 2.2/22	ECI 119/EBI 135	-
ECI/EBI 4000		≤ 6000 rpm	-	115 °C	DC 3.6 V to 14 V	-	1048576 (20 bits)	-/65536 ³⁾	EnDat 2.2/22	ECI 4010 ¹⁾ / EBI 4010 ³⁾	Page 82
	D: 90/180 mm			100 °C	DC 10 V to 28.8 V			-	DRIVE-CLiQ	ECI 4090 S ¹⁾	
ERO 1200		≤ 25000 rpm	-	100 °C	DC 5 V ±0.5 V	1024/2048	-	<u> </u>		ERO 1225	Page 86
	C 10/12 mm								~ 1 V _{PP}	ERO 1285	
ERO 1400	4 J 3 3	≤ 30000 rpm	-	70 °C	DC 5 V ±0.5 V	512/1000/1024	-			ERO 1420	Page 88
	t [∞] D: 4/6/8 mm				DC 5 V ±0.25 V	5000 to 37500 ²⁾	-			ERO 1470	
D					DC 5 V ±0.5 V	512/1000/1024			~ 1 V _{PP}	ERO 1480	-

¹⁾ Also available with functional safety
 ²⁾ After internal 5/10/20/25-fold interpolation
 ³⁾ Multiturn function via battery-buffered revolution counter

Series	Main dimensions	Mechanically permissible shaft speed	Natural frequency f _N (typical) of the coupling	Maximum operating temperature	Supply voltage	Signal periods per revolution	Positions per revolution	Distinguishable revolutions	Interface	Model	Further information
Rotary encoder	s with integral bearing and me	ounted stator of	coupling		1		1		,	-	
ECN/EQN/ ERN 1100		≤ 12000 rpm	1000 Hz	115 °C	DC 3.6 V to 14 V	512	8192 (13 bits)	-/4096	EnDat 2.2/01 with \sim 1 V _{PP}	ECN 1113/EQN 1125	Page 54
				95 °C	DC 10 V to 28.8 V	-	8388608 (23 bits)	-/4096	DRIVE-CLiQ	ECN 1123 S/EQN 1135 S	1
	<u>- 38.4</u> ੴ <u>- ∅ 6</u>			115 °C	DC 3.6 V to 14 V				EnDat 2.2/22	ECN 1123 ¹⁾ /EQN 1135 ¹⁾	1
		≤ 6000 rpm	1600 Hz	90 °C	DC 5 V ±0.5 V	500 to 8192	3 block commutatio	on signals		ERN 1123	Page 58
ECN/EQN/		≤ 15000 rpm/	15000 rpm/ 1800 Hz 12000 rpm	115 °C	DC 3.6 V to 14 V	512/2048	8192 (13 bits)	-/4096	EnDat 2.2/01 with \frown 1 V _{PP}	ECN 1313/EQN 1325	Page 60
ERN 1300		≤ 12 000 rpm				-	33554432 (25 bits)	-	EnDat 2.2/22	ECN 1325 ¹⁾ /EQN 1337 ¹⁾	
					DC 4 V to 14 V				EnDat 3/E30-R2	-	Product Information
		≤ 15000 rpm	-	120 °C	DC 5V ±0.5V	1024/2048/4096	-	1		ERN 1321	Page 66
				<i>ERN 1381/4096:</i> 80 °C			3 block commutation	on signals	-	ERN 1326	-
						512/2048/4096	_		~ 1 V _{PP}	ERN 1381	
					DC 5 V ±0.25 V	2048	Z1 track for sine co	mmutation	-	ERN 1387	-
				100 °C	DC 10 V to 28.8 V	-	16777216 (24 bits)	-/4096	DRIVE-CLIQ	ECN 1324S/EQN 1336S	Page 62

¹⁾ Also available with functional safety

Rotary encoders for mounting on motors

Protection class: up to IP64 (EN 60529)

Series	Main dimensions	Mechanically permissible shaft speed	Natural frequency f_N (typical) of the coupling	Maximum operating temperature	Supply voltage	Signal periods per revolution	Positions per revolution	Distinguishable revolutions	Interface	Model	Further information
Rotary encoders	with integral bearing and mo	ounted stator c	oupling			I					
ECN/ERN 100		Ø ≤ <i>30 mm:</i> ≤ 6000 rpm	1000 Hz	100 °C	DC 3.6 V to 14 V	2048	8192 (13 bits)	-	EnDat 2.2/01 with \sim 1 V _{PP}	ECN 113	Brochure: Rotary
	0.87	Ø > 30 mm:				-	33554432 (25 bits)		EnDat 2.2/22	ECN 125	Encoders
	55 max. ØD D: 50 mm max.	≤ 4000 rpm			DC 5V ±0.5V	1000 to 5000	-			ERN 120/ERN 180	1
				85 °C	DC 10 V to 30 V					ERN 130	1
ECN/EQN/ERN 400	Stator coupling for plane surfaces	≤ 6000 rpm	Stator coupling for plane surfaces:	100 °C	DC 3.6 V to 14 V	512/2048	8192 (13 bits)	-/4096	EnDat 2.2/01 ~~ 1 V _{PP}	ECN 413/EQN 425	1
		With two shaft clampings	t 1500 Hz Universal stator			-	33554432 (25 bits)		EnDat 2.2/22	ECN 425/EQN 437 ¹⁾	
	54.4 Ø 12	(only for hollow through shaft):			DC 4.75 V to 30 V	512	8192 (13 bits)		SSI	ECN 413/EQN 425	1
	Universal stator coupling	≤ 12000 rpm	1400112		DC 5 V ±0.5 V	250 to 5000	-	1		ERN 420	1
					DC 10 V to 30 V					ERN 430	1
	47.2 Ø 12		10	70 °C	_					ERN 460	1
				100 °C	DC 5V ±0.5V	1000 to 5000	_		~ 1 V _{PP}	ERN 480	1
ECN/EQN/ERN 400 St	Stator coupling for plane surfaces	es ≤ 6000 rpm With two shaft clampings (only for hollow through shaft):	Stator coupling for plane surfaces: 1500 Hz	100 °C	DC 10 V to 30 V	256 to 2048	8192 (13 bits)	-/4096	EnDat H I HTL SSI 41H I HTL	EQN 425	Brochure: Rotary Encoders
			Universal stator coupling: 1400 Hz		DC 4.75 V to 30 V	512 to 4096			EnDatT []_]TTL SSI 41T []_]TTL		_
		≤ 12000 rpm	1400 112		DC 3.6 V to 14 V	-	αi: 33554432 (25 bits)	4096	Fanuc	ECN 425F/EQN 437F	
					DC 10 V to 28.8 V		16777216 (24 bits)		DRIVE-CLiQ	ECN 424 S/EQN 436 S ¹⁾	
ECN/EQN/ERN 400	Expanding ring coupling	≤ 15000 rpm/ ≤ 12000 rpm	Expanding ring coupling:	100 °C	DC 3.6 V to 14 V	2048	8192 (13 bits)	-/4096	EnDat 2.2/01 with \sim 1 V _{PP}	ECN 413/EQN 425	Page 64
		2 12 000 10111	1800 Hz Plane-surface			-	33554432 (25 bits)	1	EnDat 2.2/22	ECN 425 ¹⁾ /EQN 437 ¹⁾	
		≤ 15000 rpm	<i>coupling:</i> 400 Hz		DC 5 V ±0.5 V	1024 to 5000	-	1		ERN 421	Product Information
	(not with ERN)		100112		DC 5 V ±0.25 V	2048	Z1 track for sine co	mmutation	\sim 1 V _{PP}	ERN 487	document
Plane 	Plane-surface coupling										

¹⁾ Also available with functional safety

Rotary encoders for mounting on motors

Protection class: up to IP64 (EN 60529)

Series	Main dimensions	Mechanically permissible shaft speed	Natural frequency f_N (typical) of the coupling	Maximum operating temperature	Supply voltage	Signal periods per revolution	Positions per revolution	Distinguishable revolutions	Interface	Model	Further information
Rotary encoders with integral bearing and mounted stator coupling											
ECN/EQN/ERN 1000		≤ 12000 rpm	1500 Hz	100 °C	DC 3.6 V to 14 V	512	8192 (13 bits)	-/4096	EnDat 2.2/01 with \sim 1 V _{PP}	ECN 1013/EQN 1025	Brochure: Rotary
						-	8388608 (23 bits)		EnDat 2.2/22	ECN 1023/EQN 1035	Encoders
				95 °C	DC 10 V to 28.8 V	_			DRIVE-CLiQ	ECN 1023 S/EQN 1035 S	1
	ERN 1023				DC 5 V ±0.5 V	100 to 3600	-	1	□ □ TTL/~ 1 V _{PP}	ERN 1020/ERN 1080	-
				70 °C	DC 10 V to 30 V	_				ERN 1030	-
					DC 5 V ±0.25 V	5000 to 36000 ¹⁾				ERN 1070	
		≤ 6000 rpm	1600 Hz	90 °C	DC 5 V ±0.5 V	500 to 8192	3 block commutati	on signals		ERN 1023	Page 56

¹⁾ After internal 5/10/20/25-fold interpolation

Rotary encoders for mounting on motors

Protection class: up to IP64 (EN 60529)

Series	Main dimensions	Mechanically permissible shaft speed	Natural frequency f_N (typical) of the coupling	Maximum operating temperature	Supply voltage	Signal periods per revolution	Positions per revolution	Distinguishable revolutions	Interface	Model	Further information
Rotary encoders	with integral bearing for sepa	rate shaft cou	pling		·	·		'			
ROC/ROQ/ROD 400	Synchro flange	≤ 12000 rpm	-	100 °C	DC 3.6 V to 14 V	512/2048	8192 (13 bits)	-/4096	EnDat 2.2/01 with \sim 1 V _{PP}	ROC 413/ROQ 425	Brochure: Rotary
						-	33554432 (25 bits)	•	EnDat 2.2/22	ROC 425¹⁾/ROQ 437¹⁾	Encoders
	42.7				DC 4.75 V to 30 V	512	8192 (13 bits)		SSI	ROC 413/ROQ 425	-
	Clamping flange				DC 10 V to 30 V	256 to 2048	8192 (13 bits)	-/4096	EnDat H TL HTL SSI 41H TL HTL	ROQ 425 ³⁾	
	36.7 Ø 10				DC 4.75 V to 30 V	512 to 4096	_		EnDatTCUTTL SSI 41TCUTTL		
					DC 3.6 V to 14 V	-	αi: 33554432 (25 bits)	4096	Fanuc	ROC 425F/ROQ 437F	
					DC 10 V to 28.8 V		16777216 (24 bits)	•	DRIVE-CLiQ	ROC 424 S/EQN 436 S¹⁾	-
					DC 5 V ±0.5 V	50 to 10000 ²⁾	-	_		ROD 426/ROD 420	-
					DC 10 V to 30 V	50 to 5000			ГШНТЦ	ROD 436/ROD 430	-
				70 °C	-	50 to 10000 ²⁾				ROD 466	
			-	100 °C	DC 5V ±0.5V	1000 to 5000			~ 1 V _{PP}	ROD 486/ROD 480	-
ROC/ROQ/ROD 1000	↓ →	≤ 12000 rpm	-	100 °C	DC 3.6 V to 14 V	512	8192 (13 bits)	-/4096	EnDat 2.2/01 with \sim 1 V _{PP}	ROC 1013/ROQ 1025	Brochure: Rotary
						-	8388608 (23 bits)		EnDat 2.2/22	ROC 1023/ROQ 1035	Encoders
			95 °C [DC 10 V to 28.8 V				DRIVE-CLiQ	ROC 1023 S/ROQ 1035 S	5	
				100 °C	DC 5V ±0.5V	100 to 3600	-	1		ROD 1020	-
									~ 1 V _{PP}	ROD 1080	-
				70 °C	DC 10 V to 30 V					ROD 1030	-
					DC 5 V ±0.25 V	5000 to 36000 ²⁾				ROD 1070	-
ROD 600		≤ 12000 rpm	-	80 °C	DC 5 V ±0.5 V	512 to 5000	-			ROD 620	-
									ГШНТС	ROD 630	-
ROD 1900		≤ 4000 rpm	-	70 °C	DC 10 V to 30 V	600 to 2400	-		FT_J HTL/HTLs	ROD 1930	-
¹⁾ Also available with fur	nctional safety ²⁾ After integrated	 5/10-fold interpola	l ation ³⁾ Only cla	 mping flange							

Angle encoders for built-in and hollow-shaft motors

Series	Main dimensions	Diameter	Mechanically permissible shaft speed	Natural frequency f_N (typical) of the coupling	Maximum operating temperature	Supply voltage	System accuracy	Signal periods per revolution	Positions per revolution	Interface ¹⁾	Model	Further information
Angle encoder	rs with integral bearing and	l integrated stator co	oupling	1	,	I						1
RCN 2001	010	20 mm	≤ 1500 rpm (depending on the interface	1000 Hz	<i>RCN 23x1:</i> 60 °C <i>RCN 25x1:</i> 50 °C	DC 3.6 V to 14 V	±4" ±2"	16384	67 108 864 (26 bits) 268 435 456 (28 bits)	EnDat 2.2/02 with ~~1 V _{PP}	RCN 2380 RCN 2580	Brochure: Angle Encoders
			and operating temperature)					-		EnDat 2.2/22 Fanuc Mitsubishi	RCN 23x0³⁾ RCN 25x0³⁾	With Integral Bearing
RCN 5001		35 mm	≤ 1500 rpm (depending on the interface	1000 Hz	<i>RCN 53x1:</i> 60 °C <i>RCN 55x1:</i> 50 °C	DC 3.6 V to 14 V	±4" ±2"	16384	67 108 864 (26 bits) 268 435 456 (28 bits)	EnDat 2.2/02 with ~~ 1 V _{PP}	RCN 5380 RCN 5580	
			and operating temperature)					-		EnDat 2.2/22 Fanuc Mitsubishi	RCN 53x0 ³⁾ RCN 55x0 ³⁾	
RCN 8001		D: 60 mm and 100 mm	≤ 500 rpm (depending on the interface	900 Hz	50 °C	DC 3.6 V to 14 V	±2" ±1"	32 768	536870912 (29 bits)	EnDat 2.2/02 with \sim 1 V _{PP}	RCN 8380 RCN 8580	
			and operating temperature)				±2" ±1"	-		EnDat 2.2/22 Fanuc Mitsubishi	RCN 83x0 ³⁾ RCN 85x0 ³⁾	
Modular angle	encoders with optical scan	ning		1]							
ECA 4000 Scale drum with		D1: 70 mm to 512 mm D2: 104.3 mm	≤ 15000 rpm to ≤ 8500 rpm	-	70 °C	DC 3.6 V to 14 V	±3" to ±1.5"	-	-	EnDat 2.2	ECA 4410 ³⁾	Product Information
centering collar; screwed to shaft		to 560.46 mm	10 2 0000 1011							Fanuc	ECA 4490F	document: ECA 4000
on front face										Mitsubishi	ECA 4490M	
ERA 4x80 Scale drum with	Ø D2 19	D1: 40 mm to 512 mm D2: 76.5 mm	≤ 10000 rpm to ≤ 1500 rpm	-	80 °C	DC 5 V ±0.5 V	±5" to ±2"	12000 to 52000	-	∕~ 1 V _{PP}	ERA 4280C	Brochure: Modular
centering collar; screwed to shaft		to 560.46 mm						6000 to 44000			ERA 4480 C	Angle Encoders
on front face								3000 to 13000			ERA 4880 C	
ERA 4282 Scale drum for increased accuracy screwed to shaft on font face	<i>1</i> ;	D1: 40 mm to 270 mm D2: 76.5 mm to 331.31 mm	≤ 10000 rpm to ≤ 2500 rpm	-	80 °C	DC 5V ±0.5V	±4" to ±1.7"	12000 to 52000	-	✓ 1 V _{PP}	ERA 4282C	
Modular angle	e encoders with magnetic sc	anning	1	1	1			1	-			
ERM 2200		D1: 40 mm to 410 mm	≤ 22000 rpm to	-	<i>ERM 24x0:</i> 100 °C	DC 5 V ±0.5 V	-	512 to 3600	-		ERM 2420	Brochure: Modular
Signal period of approx. 200 µm ERM 2400 Signal period of approx. 400 µm		to 452.64 mm	≤ 3000 rpm		60 °C					✓ 1 V _{PP}	ERM 2280 ERM 2480	Angle Encoders With Magnetic
ERM 2400 Signal period of approx. 400 μm		D1: 30 mm to 100 mm D2: 45.26 mm to 128.75 mm	≤ 60000 rpm to ≤ 20000 rpm	-	100 °C	DC 5 V ±0.5 V	-	360 to 1024	-	~ 1 V _{PP}	ERM 2484	_ Scanning
ERM 2900 Signal period of approx. 1000 µm		D1: 35 mm to 100 mm D2: 54.43 mm to 120.96 mm	≤ 50000 rpm/ ≤ 16000 rpm	-				180 to 400	-	-	ERM 2984	-

Exposed linear encoders for linear motors

Series	Main dimensions	Traversing speed	Acceleration in measuring direction	Accuracy grade	Measuring lengths	Supply voltage	Signal period	Cutoff frequer -3 dB
LIP 6000	3.2 NL + 10 ML + 10 3.2 6.8	≤ 240 m/min	≤ 500 m/s ²	Down to ±1µm ¹⁾	20 mm to 3040 mm	DC 5V ±0.5V	4 μm	≥ 1 MHz
LIF 400	<u>3.05</u> <u>WL + 10</u> <u>Q</u> <u>16.5</u>	≤ 240 m/min	≤ 400 m/s ²	±1 µm ¹⁾	70 mm to 1020 mm	DC 5 V ±0.25 V	4 μm	≥ 1 MHz
LIC 2100 Absolute linear encoder	<u>2.58</u> <u><u>0</u> <u>ML + 30</u> <u><u>0</u> <u>12</u></u></u>	≤ 600 m/min	≤ 500 m/s ²	±15 μm	120 mm to 3020 mm	DC 3.6 V to 14 V	-	-
LIC 4100 ²⁾ Absolute linear encoder	6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	≤ 600 m/min	≤ 500 m/s ²	±5 μm	140 mm to 27 040 mm	DC 3.6 V to 14 V	_	_
	<u>2.7</u> <u>ML + 30</u> <u>w</u> <u>12</u>			±5 μm ³⁾	140 mm to 6040 mm			
	ML + 28			±3 μm or ±15 μm	70 mm to 1020 mm	DC 3.6 V to 14 V	-	-
LIDA 400	ML + 28	≤ 480 m/min	≤ 500 m/s ²	±5 μm	140 mm to 30 040 mm	DC 5 V ±0.25 V	20 µm	≥ 400 kHz
	6 0 0 0 0 0 0 0 0 0 0 0 0 0			±5 μm ¹⁾	240 mm to 6040 mm			
LIDA 200	<u>2.6</u> <u>12</u> <u>NL + 30</u> <u>9</u> <u>12</u> <u>N</u>	≤ 600 m/min	≤ 200 m/s ²	±15 μm	Up to 10000 mm	DC 5 V ±0.25 V	200 µm	≥ 50 kHz

With Zerodur glass ceramic up to a measuring length of 1020 mm
 Also available with Fanuc, Mitsubishi, Panasonic, and Yaskawa interfaces
 After linear error compensation
 Also available with functional safety

су	Switching output	Interface	Model	Further information
	Homing track Limit switch	∕~ 1 V _{PP}	LIP 6081	Brochure: Exposed Linear
			LIP 6071	Encoders
	Homing track Limit switch	∕~ 1 V _{PP}	LIF 481	
			LIF 471	
	-	EnDat 2.2/22 Resolution 0.05 µm	LIC 2107	
	-	EnDat 2.2/22 Resolution: 0.001 µm	LIC 4115	
			LIC 4117	
	-	EnDat 2.2	LIC 4119 ⁴⁾	
	Limit switch	∕~ 1 V _{PP}	LIDA 485	
			LIDA 475	
		∕~ 1 V _{PP}	LIDA 487	
			LIDA 477	
	-	∕~ 1 V _{PP}	LIDA 287	
			LIDA 277	

Sealed linear encoders for linear motors

Protection class: IP53 to IP64¹⁾ (EN 60529)

Series	Main dimensions	Traversing speed	Acceleration in direction of measurement	Measuring lengths	Accuracy grade	Supply voltage	Signal period	Cutoff frequency -3 dB	Resolution	Interface ²⁾	Model	Further information
Linear enco	ders with slimline scale housing			1	I					_		
LF	ML + 158	≤ 60 m/min	≤ 100 m/s ²	50 mm to 1220 mm	±5 μm	DC 5 V ±0.25 V	4 μm	≥ 250 kHz	-	∼ 1 V _{РР}	LF 485	Brochure: Linear Encoders for Numerically Controlled Machine Tools
LC Absolute linear encoder	ML + 138	≤ 180 m/min	≤ 100 m/s ²	70 mm to 2040 mm ³⁾	±5 μm ±3 μm	DC 3.6 V to 14 V	-	-	Down to 0.01 μm Down to 0.001 μm	EnDat 2.2/22	LC 415 ⁴⁾	
					±5 µm		20 µm	≥ 150 kHz	Down to 0.01 µm	EnDat 2.2/02	LC 485	_
					±3 µm				Down to 0.05 µm			
Linear encoders with full-size scale housing												
			2	440			1			0 11/	1	

±2 μm; ±3 μm LF ≤ 60 m/min $\leq 100 \text{ m/s}^2$ 140 mm to DC 5 V ±0.25 V 4 µm ≥ 250 kHz 3040 mm 35 62.5 37_ ML + 121 LC ≤ 180 m/min $\leq 100 \text{ m/s}^2$ 140 mm to DC 3.6 V to 14 V ±5 μm Absolute 4240 mm mnor 0 000 85 linear encoder 140 mm to ±3 µm 62.5 3040 mm ML + 121 37 20 µm 140 mm to ≥ 150 kHz ±5 μm 4240 mm 140 mm to ±3 μm 3040 mm ≤ 120 m/min $\leq 100 \text{ m/s}^2$ 440 mm to ±5 μm DC 3.6 V to 14 V (180 m/min 28040 mm upon request) ≥ 250 kHz 40 µm 63.2 50 ML + 276 LB $\leq 60 \text{ m/s}^2$ 440 mm to 30040 mm DC 5V ±0.25V ≤ 120 m/min Down to 40 µm ≥ 250 kHz (up to 72040 mm (180 m/min ±5 μm upon request) upon request) ଞ ₅₀ ML + 276

After mounting in accordance with mounting instructions
 Interfaces for Siemens, Fanuc, and Mitsubishi controls available upon request
 At or above a measuring length of 1340 mm: only with mounting spar or clamping elements
 Also available with functional safety

-	∕~ 1 V _{PP}	LF 185	Brochure: Linear Encoders for Numerically Controlled Machine Tools
Down to 0.01 µm	EnDat 2.2/22	LC 115 ⁴⁾	
Down to 0.001 µm			
Down to 0.01 µm	EnDat 2.2/02	LC 185	
Down to 0.05 µm			
Down to 0.01 µm	EnDat 2.2/22	LC 211	
	EnDat 2.2/02 with へ 1 V _{PP}	LC 281	
-	∕~ 1 V _{PP}	LB 382	

Rotary encoders and angle encoders for DC and three-phase AC motors General information

Speed stability

In order to obtain good motor speed **stability**, the encoder must provide a high number of measuring steps per revolution. For this reason, the HEIDENHAIN product portfolio includes encoders that output a sufficient number of measuring steps per revolution for the required speed stability.

HEIDENHAIN rotary encoders and angle encoders with an integral bearing and stator coupling exhibit particularly advantageous behavior: shaft misalignment within a certain tolerance range does not induce position errors or impaired speed stability (see Specifications).

Position errors within one signal period adversely affect the positioning accuracy and speed stability of the motor. At low feed rates, the motor mimics the position error within one signal period.

Transmission of measuring signals

For good dynamic performance with digital speed control, the cycle time of the speed controller should not exceed approximately 125 µs. In addition, the actual values for the position controller and speed controller must be available to the controlling system with the least possible delay.

High clock frequencies are needed to fulfill such demanding time requirements on position-value transmission from the encoder to the controlling system with serial data transmission (see also the Interfaces of HEIDENHAIN Encoders brochure). This is why HEIDENHAIN encoders for electric motors output the position values over the fast, purely serial EnDat 2.2 or EnDat 3 interface or transmit additional incremental **signals** that are available to the subsequent electronics virtually without delay for speed or position control.

For **standard drives,** manufacturers primarily use the especially robust ECI/EBI/EQI encoders without integral bearing or rotary encoders with TTL or HTL compatible output signals—as well as additional commutation signals for permanent DC drives.

For digital speed control on machines with high dynamic-performance requirements, a large number of measuring steps are required—usually more than 500 000 per revolution. For applications with standard motors, approximately 60 000 measuring steps per revolution are sufficient (similar to resolvers).

HEIDENHAIN encoders for motors with digital position and speed control are therefore equipped with the purely serial EnDat22/EnDat3 interface, or they output additional sinusoidal incremental signals at 1 VPP signal levels (EnDat01).

The high internal resolution of the EnDat22 and EnDat3 encoders permits resolutions of up to 19 bits (524288 measuring steps) in inductive systems and at least 25 bits (approx. 33 million measuring steps) in photoelectric encoders.

Thanks to their high signal quality, the sinusoidal incremental signals of the EnDat01 encoders can be highly subdivided in the subsequent electronics (see Figure 1). Even at speeds of 12 000 rpm, the signal arrives at the input circuit of the controlling system with a frequency of only approximately 400 kHz (see Figure 2). Cable lengths of up to 150 m are possible with 1 VPP incremental signals (see also 1 VPP incremental signals).

HEIDENHAIN absolute encoders for "digital" motors deliver additional sinusoidal incremental signals with the same characteristics as those described above. Absolute encoders from HEIDENHAIN use the EnDat interface (for Encoder Data) for the serial data transmission of absolute position values and other information for automatic self-configuration, monitoring and diagnosis. This makes it possible to use the same subsequent electronics and cabling technology for all HEIDENHAIN encoders.

With EnDat22 (HMC 6) and EnDat3 (HMC 2) the serial data transfer can take place within the motor cable, thus significantly reducing cabling and costs.

For automatic configuration, important encoder specifications can be read from the memory of the EnDat encoder, and motor-specific parameters can be saved in the encoder's OEM memory area. The usable size of the OEM memory for the rotary encoders listed in the current brochures is at least 1.4 KB (≙ 704 EnDat words).

Most absolute encoders internally subdivide the sinusoidal scanning signals by a factor of 4096 or greater. When these systems are operated with sufficiently fast transmission of the absolute position values (e.g., at a clock frequency of 2 MHz with EnDat 2.1 or 16 MHz with EnDat 2.2) or EnDat3 (12.5 or 25 Mbit/s), incremental signal evaluation can be eliminated altogether

Shaft speed and resulting output frequency as a function of the number

4096-

2048-

 102^{4}

Signal periods per revolution

Figure 2:

Output frequency in kHz

of signal periods per revolution

1000


100

The benefits of this data transmission technology are higher noise immunity along the transmission path and **less** expensive connectors and cables. A large share of rotary encoders equipped with the EnDat 2.2 or EnDat 3 interface are also able to evaluate an external temperature sensor (e.g., located in the motor winding). The digitized temperature values are transmitted as part of the EnDat 2.2 or EnDat 3 protocol without an additional line.

Bandwidth

The attainable gain levels for the position and speed control loops, and therefore the bandwidth of the motor with regard to command and disturbance behavior, may be limited by the rigidity of the coupling between the motor shaft and the encoder shaft, as well as by the natural frequency of the stator coupling. HEIDENHAIN therefore offers rotary and angle encoders for high-rigidity shaft couplings. The stator couplings mounted on the encoder exhibit high natural frequencies f_N. With modular and inductive rotary encoders, the stator and rotor are firmly screwed to the motor housing and the shaft (see also Mechanical design types and mounting). This mechanical design therefore permits optimal coupling rigidity.

Figure 1:

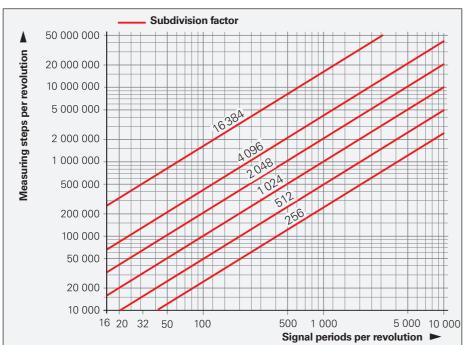

Signal periods per revolution and the resulting number of measuring steps per revolution as a function of the subdivision factor

10 5 3 3000 9000 12000 15000 1500 6000 Shaft speed in rom

Motor currents

Motors may exhibit impermissible current flowing from the rotor to the stator. This can cause the encoder bearing to overheat, thereby shortening its service life. HEIDENHAIN thus recommends the use of encoders without an integral bearing or encoders with an electrically isolated bearing (hybrid bearing). For more information, please contact HEIDENHAIN.

Fault exclusion for mechanical coupling

HEIDENHAIN encoders designed for functional safety can be mounted in such a way that the rotor or stator fastening does not accidentally loosen.

Size

The higher a motor's permissible operating temperature is, the smaller the motor can be made for a given torque. Since the temperature of the motor also affects the temperature of the encoder, HEIDENHAIN offers encoders for permissible operating temperatures of up to 120 °C. These encoders make it possible to implement smaller motors.

Power dissipation and acoustic noise

While the motor is running, encoder position errors within one signal period affect the motor's power dissipation as well as the heat generation and acoustic noise that go along with it. For this reason, rotary encoders with high signal guality (better than ±1% of the signal period) are preferred (see also Measuring accuracy).

Bit error rate

For rotary encoders with a purely serial interface for installation within motors, HEIDENHAIN recommends conducting a type test for the bit error rate.

The use of functionally safe encoders without closed metal housings and/or with cable assemblies that do not comply with the electrical connection directives (see General electrical information) always requires the bit error rate to be measured in a type test under application conditions.

Preventive maintenance

Encoders with serial data transfer provide information that enables monitoring of the operating status and thus preventive maintenance:

- Diagnostics
- Clearance gap for optimized and verifiable mounting and application conditions
- Connectable external temperature sensor

HMC 2 and HMC 6 Single-cable solutions for servomotors

Servomotors normally require two separate cables:


- One encoder cable for the motor encoder
- One power cable for the motor supply


With the **HMC** solution (Hybrid Motor Cable), HEIDENHAIN has integrated the encoder cable into the power cable. Thus, only a single cable is now needed between the motor and the electrical cabinet.

The HMC 6 single-cable solution was specifically designed for the HEIDENHAIN EnDat22 interface, and the HMC 2 version is for **EnDat3**. With purely serial data transmission, cable lengths of up to 100 m can be realized. However, with HMC 6 all other encoders equipped with a purely serial RS-485 interface (e.g., SSI) can be connected as well. A wide range of encoders can therefore be used without the need for introducing a new interface.

The HMC solution combines the wires for the encoder, motor, and brake into a single cable, which is connected to the motor via a special connector. For connection to the frequency inverter, the cable is split into power connections, brake connections, and an encoder connector.

When the components are correctly assembled, the connecting elements attain an IP67 rating.

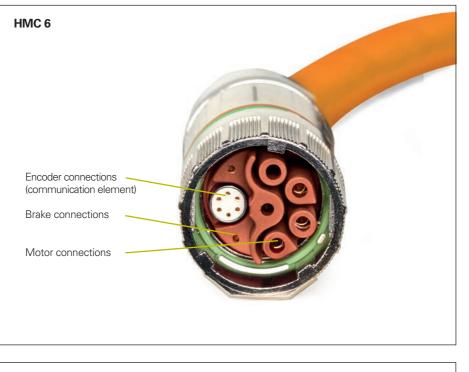

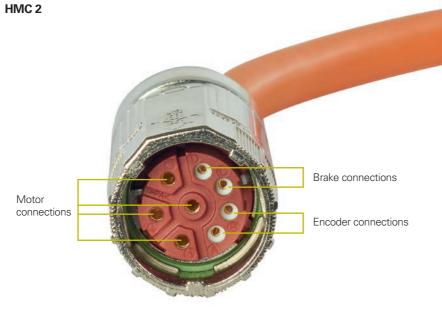

Benefits

The HMC single-cable solutions offer a series of cost and quality benefits for motor and machine manufacturers:

- Continued use of existing interfaces
- Realization of smaller drag chains
- Significant improvement in drag-chain suitability thanks to fewer cables
- Wide range of available encoders for HMC 2 and HMC 6 transmission
- Eliminated separate assignment of power cables and encoder cables in the machine
- Reduced mechanical requirements (flange socket on the motor, cable ducts in the machine housing)
- Reduced logistics for cables and connectors
- Easier and faster installation
- Reduced documentation

- Fewer required servicing components
- Smaller motor profile with cable attached, enabling easier integration into the machine housing
- HEIDENHAIN-tested combination of power and encoder cable

The universal design of the HMC solution gives motor and machine manufacturers high flexibility, letting them use standard components on both the motor and the control.

All HEIDENHAIN encoders with

EnDat22 interface or with purely serial data transfer without battery buffering as per RS-485 are suited for the HMC 6 single-cable solution. This includes motor encoders for servomotors in various sizes, linear and angle encoders used in direct drive motors, as well as encoders for functional safety up to SIL 3.

The HMC 2 single-cable solution can be used with motor encoders featuring the EnDat 3 interface (ordering designation: E30-R2) and purely serial data transmission via two wires. The Exl 1100/1300 and ExN 1300 series rotary encoders are available for functional safety applications with up to SIL 3.

For the controlling hardware you can continue to use already deployed frequency inverters or controller units. The HMC cables have been designed for easy assembly of the matching connecting elements. Importantly, this does not impair the noise immunity.

Components

Preparing a motor for the single-cable solution requires only a handful of components.

Connecting element on the motor

The motor housing is equipped with a standard flange socket for HMC 2 or a special angle flange socket for HMC 6. This angle flange socket brings together the wires for the encoder, motor power, and brake.

Crimping tools for the power wires

The crimp contacts for the power and brake wires are assembled with the usual tools.

Output cables inside the motor housing


The rotary encoder is connected by means of the output cables inside the motor housing: your pre-assembled communication element for the HMC 6 or the two contacts for HMC 2 are simply plugged into the angle flange socket.

Cable with hybrid connector

The HMC connecting cable contains the wires for the encoder, power supply, and brake





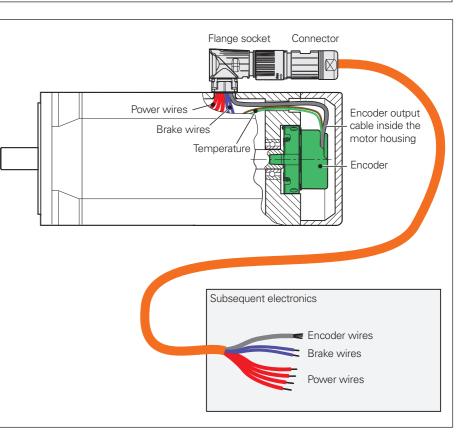

(**D**) Further information:

For more information about HMC 6 and HMC 2, refer to the respective Product Information document and visit www.endat.de.

Safety-related position measuring systems

Safe axes

Driven axes and moving parts can represent a great hazard for humans. Particularly if the human interacts with the machine (e.g., during workpiece setup), it must be ensured that the machine does not make any uncontrolled movements. Here, the position information of axes is needed to conduct a safety function. As an evaluating safety module, the control has the task of detecting faulty position information and reacting to it accordingly.

Various safety strategies can be pursued, depending on the topology of the axis and the evaluation capabilities of the control. In a single-encoder system, for example, only one encoder per axis is evaluated for the safety function. However, on axes with two encoders, such as a linear axis with a rotary and a linear encoder, the two redundant position values can be compared with each other in the control.

Safe fault detection can be ensured only if the two components—control and encoder—are properly adapted to one another. Here, it is to be noted that the safety designs of control manufacturers differ from one another. This also means that the requirements to be fulfilled by the connected encoders can sometimes differ.

Type-examined encoders

Encoders from HEIDENHAIN are used successfully on a variety of controls in widely differing safety designs. This applies particularly to the type-examined encoders with EnDat and DRIVE-CLiQ interfaces. The encoders can be operated as single-encoder systems in conjunction with a suitable control in applications with the control category SIL 3 (according to EN 61508) or performance level "e" (of EN ISO 13849). Unlike incremental encoders, absolute encoders always provide a safe absolute position value-including immediately after switch-on or a power failure. The reliable transmission of the position is based on two independently generated absolute position values and on error bits provided to the safe control. The purely serial data transmission also offers other advantages, such as greater reliability, improved accuracy, diagnostic capabilities, and reduced costs through simpler connection technology.

Standard encoders

In addition to those encoders explicitly qualified for safety applications, standard encoders (e.g., with Fanuc interface or 1 V_{PP} signals) can also be used in safe axes. In such cases, the characteristics of the encoders must be matched to the requirements of the respective control. To this end, HEIDENHAIN can provide additional data about the individual encoders (failure rate, fault model as per EN 61800-5-2).

Service life

Unless otherwise specified, HEIDENHAIN encoders are designed for a service life of 20 years (in accordance with ISO 13849).

Further information:

The safety-related characteristic values are listed in the specifications of the encoders. The Technical Information document Safety-Related Position Encoders provides explanations of the characteristic values. Upon request, HEIDENHAIN can likewise provide additional data about the individual products (failure rate, fault model as per EN 61800-5-2) for the use of standard encoders in safety-related applications.

Fault exclusion for the loosening of the mechanical connection

Irrespective of the interface, many safety designs require the safe mechanical connection of the encoder. The standard for electric drives, EN 61800-5-2, includes the loosening of the mechanical connection between the encoder and the drive as a fault that requires consideration. Because the control may not be able to detect such errors, fault exclusion is required in many cases. The requirements on a fault exclusion

can result in additional constraints in the permissible limit values in the specifications. In addition, fault exclusions for the loss or loosening of the mechanical coupling usually require additional measures when mounting the encoders or in the event of servicing, e.g. anti-rotation lock for screws. These factors must be considered for the selection of a suitable encoder or a mounting mode

Further information:

Adhere to the information in the following documents to ensure the corr and intended operation of the encoder: Mounting Instructions Product Information • Customer information about fault exclusion • Technical Information document: Safety-Related Position Measuring Systems 59663 For implementation in a control with EnDat22: • Specification for Safe Control 53309


For implementation in a control with EnDat3: Application Conditions for Functional Safety

Safety-related position measuring system with EnDat 2.2

Measured-value Transmission line **Reception of measured values** acquisition Safe control EnDat 2.2 or Interface 1 EnDat 3 ositior EnDat Master (protocol and cable) Position 2 Catalog of measures Two independent Serial data transmission Position values and error bits position values via two processor interfaces Internal monitoring Monitoring functions Protocol implementation Efficiency test

DRIVE-CLiQ is a registered trademark of Siemens AG.

Safety-related position measuring system EnDat 2.2 or EnDat 3 EnDat Master Safe control Motor Encoder Power cable Power stage

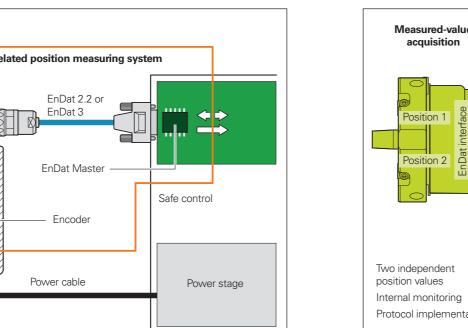

Standard encoders

In addition to those encoders explicitly qualified for safety applications, standard encoders (e.g., with 1 VPP signals) can be used in safe applications as well. In such cases, the characteristics of the encoders must be matched to the requirements of the respective control. To this end, HEIDENHAIN can provide additional data about the individual encoders (failure rate. fault model as per EN 61800-5-2).

ne correct	
596632	
533095	
3000003	





Measuring principles Measuring standard

HEIDENHAIN encoders with optical scanning incorporate measuring standards consisting of periodic structures known as graduations

These graduations are applied to a substrate of glass or steel. For encoders with large diameters, steel tape is used as the substrate.

HEIDENHAIN manufactures its precision graduations in specially developed, photolithographic processes:

- AURODUR: matte-etched lines on a gold-plated steel tape; typical grating period: 40 um
- METALLUR: contamination-tolerant graduation consisting of metal lines on gold; typical grating period: 20 µm
- DIADUR: extremely robust chromium lines on glass (typical grating period: 20 µm), or three-dimensional chromium structures (typical grating period: 8 µm) on glass
- SUPRADUR phase grating: optically three-dimensional, planar structure; particularly tolerant to contamination; typical grating period: 8 µm and finer
- OPTODUR phase grating: optically three-dimensional, planar structure with particularly high reflectance; typical graduation period: 2 µm and finer

For magnetic encoders, a substrate made of magnetizable steel alloy is used. Within it, a graduation consisting of north and south poles is created with a grating period of 400 µm. Due to the short range of electromagnetic interactions and the resulting narrowness of the scanning gap, finer magnetic graduations are not practical.

Encoders that use the **inductive scanning** principle employ metal graduations or copper/nickel-based graduations. These graduation structures are applied to a printed-circuit carrier material

In the absolute measuring method, the position value is available immediately upon encoder switch-on and can be requested by the subsequent electronics at any time. There is therefore no need to search for the reference position by jogging the axes. This absolute position information is ascertained from the graduation of the graduated disk, which contains a code structure or consists of multiple parallel graduation tracks.

A separate incremental track, or the track with the finest grating period, is interpolated for the position value and is simultaneously used to generate an optional incremental signal.

Singleturn rotary encoders repeat the absolute position information with each revolution. Multiturn encoders can distinguish between additional revolutions.




Graduated disks of absolute rotary encoders

In the incremental measuring method, the graduation consists of a periodic grating structure. Position information is obtained through the counting of individual increments (measuring steps) starting from a freely settable point of origin. Since position ascertainment requires an absolute reference, the graduated disks have an additional track containing a reference mark.

established or the most recently selected reference point can be refound, this reference mark must first be traversed.






Photoelectric scanning

Most HEIDENHAIN encoders utilize the photoelectric scanning principle. Photoelectric scanning is performed contact-free and thus does not induce wear. This method detects even extremely fine graduation lines down to a width of only a few micrometers and generates output signals with very small signal periods.


The ERN/ECN/EQN/ERO and ROD/RCN/ RQN rotary encoders are designed in accordance with the imaging scanning principle.

Put simply, the imaging scanning principle uses projected-light signal generation: two gratings with equal or similar grating periods-the graduated disk and the scanning reticle—are moved relative to each other. The carrier material of the scanning reticle is transparent, whereas the graduation of the measuring standard may likewise be applied to a transparent material or to a reflective material. When parallel light passes through a grating structure, light and dark fields are projected at a certain distance. At this location there is an index grating with the same or similar grating period. When the two graduations move relative to each other, the incident light is modulated: if the gaps are aligned, light passes through. If the lines of one grating coincide with the gaps of the other, no light passes through. Photocells or a structured photosensor convert these fluctuations in light into nearly sinusoidal electrical signals. In encoders that use the imaging scanning principle, workable mounting tolerances are attainable starting at a minimum grating period of 10 µm.

The ECN and EQN absolute rotary encoders with optimized scanning contain a single, large-surface, finely structured photosensor rather than a group of individual photocells. The width of the photosensor's structures is identical to the width of the measuring standard's grating structure. A scanning reticle with a matching structure is therefore not needed.

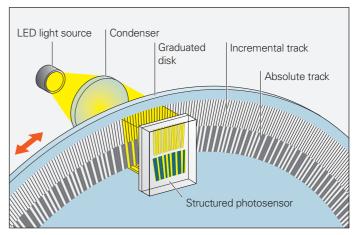

Photoelectric scanning according to the imaging scanning principle

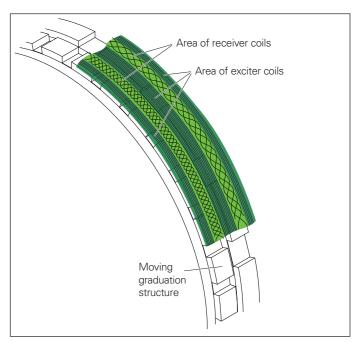

Other scanning principles

Some encoders operate in accordance with other scanning methods. As their measuring standard, ERM encoders use a permanently magnetized MAGNODUR graduation that is scanned with magnetoresistive sensors.

ECI/EQI/EBI rotary encoders operate according to the inductive measuring principle. In this case, moving graduation structures modulate the gain and phase of a high-frequency signal. By means of circumferential scanning, the position value is always generated based on the signals from the receiver coils that are distributed along the circumference. This permits wide mounting tolerances at high resolution.



Graduated disks of incremental rotary encoders

Inductive scanning

Measuring accuracy

Electronic commutation with position encoders

Commutation with permanent-magnet three-phase AC motors


Electronic commutation for a permanentmagnet three-phase AC motor requires the position of the rotor as an absolute value prior to motor start-up. HEIDENHAIN rotary encoders come with different types of rotor position recognition:

- Absolute rotary encoders in singleturn and multiturn versions provide the absolute position information immediately after switch-on, allowing the exact position of the rotor to be derived for electronic commutation.
- Along with delivering incremental signals, incremental rotary encoders with a second track—the **Z1 track**—provide one sine and one cosine signal (C and D) for each revolution of the motor shaft. For sine commutation, rotary encoders with a Z1 track simply require a subdivision unit and a signal multiplexer in order to obtain the absolute rotor position down to an accuracy of $\pm 5^{\circ}$ from the Z1 track and to obtain the position information for speed and position control from the incremental track (see also Interfaces: Commutation signals).

• Incremental rotary encoders with block commutation tracks also output three commutation signals U, V, and W, which are used to directly drive the power electronics. These rotary encoders are available with various commutation tracks. Typical versions have three signal periods (120° mech.) or four signal periods (90° mech.) per commutation signal and revolution. Irrespective of this, the incremental square-wave signals are used for position and speed control (see also Interfaces: Commutation signals).

Commutation of synchronous linear motors

Like absolute rotary and angular encoders. the LIC and LC absolute linear encoder series provide the exact position of the motor's moving component immediately upon switch-on. Maximum holding load is thereby possible even at standstill.







Graduated disk with block commutation tracks

Graduated disk with

serial code track and incremental track

Graduated disk with

Z1 track

The variables influencing the accuracy of linear encoders are listed in the Linear Encoders For Numerically Controlled Machine Tools and Exposed Linear Encoders brochures.

The angular measurement accuracy is primarily determined by the following factors:

- Quality of the graduation
- Scanning guality
- Quality of the signal processing electronics
- Eccentricity of the graduation relative to the bearing
- Error of the bearing
- · Coupling with the drive shaft
- · Elasticity of the stator coupling (ERN, ECN, EQN) or shaft coupling (ROD, ROC, ROQ)

These factors can be divided into encoderspecific errors and application-specific factors. For assessment of the attainable overall accuracy, all of these individual factors must be taken into account.

Encoder-specific error In the specifications for rotary encoders,

the encoder-specific error is stated as the system accuracy.


The extreme values of the total error for any given position relative to their mean lie within the system accuracy of $\pm a$.

The system accuracy reflects position errors within one revolution as well as interpolation errors within one signal period and-for rotary encoders with stator coupling-the errors of the shaft coupling.

Interpolation error within one signal period

The interpolation error within one signal period is considered separately, since it has an effect even in very small angular movements and in repeated measurements. It particularly causes speed ripples in the speed control loop.

The interpolation error within one signal period ±u results from the scanning quality and, for encoders with integrated pulseshaping or counter electronics, the quality of the signal-processing electronics. For encoders with sinusoidal output signals, however, the error from the signal processing electronics is dictated by the subsequent electronics.

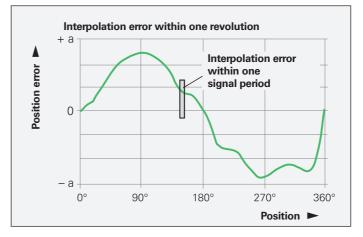

Example 7 Further information:


Please note the switch-on behavior of the encoders (see the Interfaces of HEIDENHAIN Encoders brochure).

The following factors influence the outcome:

- Fineness of the signal period
- Homogeneity and period definition of the graduation
- Quality of scanning filter structures
- Characteristics of the sensors
- Stability and dynamic performance of further analog signal processing

These errors are taken into account in the information about interpolation error within one signal period. For rotary encoders with an integral bearing and sinusoidal output signals, these errors are less than $\pm 1\%$ of the signal period, and less than $\pm 3\%$ for encoders with square-wave output signals. These signals are suitable for up to 100-fold PLL subdivision.

Due to the higher reproducibility of a position, much smaller measuring steps are still practical.

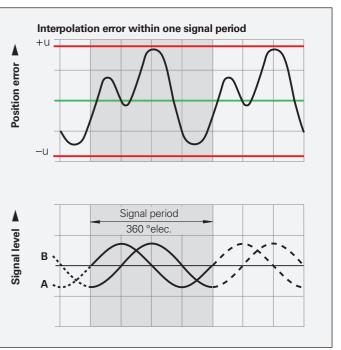

For rotary encoders with an integral

bearing, the specified system accuracy already takes the error of the bearing into account. In the case of angle encoders with a separate shaft coupling (ROD, ROC, ROQ), the angular error of the coupling must be considered as well (see Mechanical design types and mounting). For angle encoders with stator coupling (ERN, ECN, EQN), the system accuracy already includes the error of the shaft coupling.

In contrast, for encoders without integral **bearing**, the mounting, as well as the adjustment of the scanning head, has a decisive influence on the attainable overall accuracy. Of particular importance are both the mounting eccentricity of the graduation and the radial runout of the measured shaft. Evaluation of the **overall accuracy** of these encoders requires that their applicationdependent errors be individually measured and taken into account.

Rotary encoders with photoelectric scanning

In addition to the system accuracy, the mounting quality and adjustment of the scanning head also have a significant effect on the attainable overall accuracy of rotary encoders without an integral bearing but with photoelectric scanning. Of particular importance are the mounting eccentricity of the graduation and the radial runout of the measured shaft.

Example

For an ERO 1420 rotary encoder with a mean graduation diameter of 24.85 mm: A radial runout of the measured shaft of 0.02 mm results in a position error of ±330 arc seconds within one revolution.

To evaluate the accuracy of modular rotary encoders without an integral bearing (ERO), the relevant errors must be considered individually.

1. Directional errors of the graduation

ERO: The extreme values of the directional errors relative to their mean are listed in the Specifications as the accuracy of the graduation. The system accuracy consists of the graduation accuracy and position error within one signal period.

2. Errors due to eccentricity of the graduation relative to the bearing

During mounting of the disk/hub assembly, it is to be expected that the bearing will exhibit radial runout or eccentricity errors. When centering via the centering collar of the hub, bear in mind that HEIDENHAIN guarantees an eccentricity of the graduation relative to the centering collar of less than 5 µm for the encoders listed in this brochure. With modular encoders, this stated accuracy presupposes a diameter error of zero between the motor shaft and the "master shaft."

In the worst-case scenario, if the centering collar is centered relative to the bearing, then the two eccentricity vectors may be cumulative.

The following relationship exists between the eccentricity e, the mean graduation diameter D, and the measuring error $\Delta \phi$ (see figure below):

- $\Delta \phi = \pm 412 \cdot \frac{e}{D}$
- $\Delta \phi$ = Measuring error in " (arc seconds)
- e = Eccentricity of the radial grating
- relative to the bearing in µm D = Mean graduation diameter in mm

Version	Graduation centerline diameter D	Error per 1 µm of eccentricity
ERO 1420 ERO 1470 ERO 1480	D = 24.85 mm	±16.5"
ERO 1225 ERO 1285	D = 38.5 mm	±10.7"


The stated relationship for the measuring error $\Delta \phi$ also applies to the radial runout of the bearing when the eccentricity e is replaced by one half of the radial runout (half of the displayed value).


4. Position error within one signal period $\Delta \omega_{\rm m}$

The scanning units of all HEIDENHAIN encoders are adjusted such that, without any further electrical adjustment during mounting, the maximum position error within one signal period (listed below) is not exceeded.

Model	Line count	Position error within one signal period Δφ _L TTL 1 V _{PP}	
ERO	2048	$\leq \pm 19.0''$	$\leq \pm 6.5''$
	1500	$\leq \pm 26.0''$	$\leq \pm 8.7''$
	1024	$\leq \pm 38.0''$	$\leq \pm 13.0''$
	1000	$\leq \pm 40.0''$	$\leq \pm 14.0''$
	512	$\leq \pm 76.0''$	$\leq \pm 25.0''$

These values for the position error within one signal period are already included in the system accuracy. Greater error can arise if the mounting tolerances are exceeded.

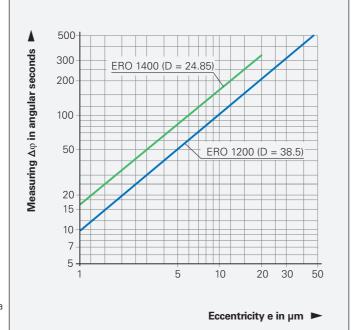

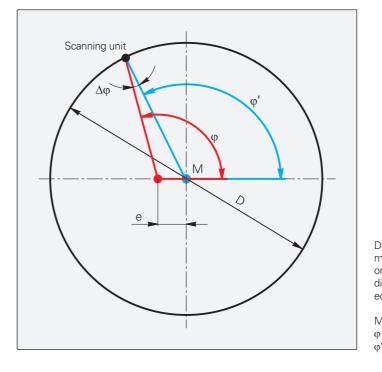

Resultant measuring error $\Delta \phi$ for various eccentricity values e as a function of the mean graduation diameter D

3. Radial runout of the bearing

Bearing compliance under a radial load applied to the shaft causes similar errors.

Rotary encoders with inductive scanning

As with all rotary encoders without an integral bearing, the attainable accuracy of inductive-scanning encoders without an integral bearing depends on the mounting and application conditions. The stated system accuracy assumes a temperature of 20 °C and a low shaft speed. The utilization of all permissible tolerances for the operating temperature, speed, supply voltage, scanning gap, and mounting condition must be taken into account for determining the typical total error.

Since inductive rotary encoders use circumferential scanning, their overall error is generally lower than that of optical rotary encoders without an integral bearing. Because overall error cannot be determined through a simple calculation, these values are provided in the following table.

Model	System accuracy	Total error
ECI 1100 EBI 1100 EQI 1100 EnDat22 E30-R2	±120"	±280"
ECI 1300 (S) EQI 1300 (S) EnDat22 E30-R2 DQ01	±65″	±120"
ECI 100 EBI 100	±90"	±180″
ECI 4000 (S) EBI 4000 90 mm hollow shaft EnDat22 DQ01	±25"	±140"
ECI 4000 (S) EBI 4000 180 mm hollow shaft EnDat22 DQ01	±40"	±150"

Dependency of the measuring error $\Delta \phi$ on the mean graduation diameter D and the eccentricity e.

M = Center of graduation

 $\phi = "True" angle$

 ϕ' = Scanned angle

Mechanical design types and mounting

Rotary encoders with integral bearing and stator coupling

The ECN/EQN/ERN rotary encoders

feature an integral bearing and a mounted stator coupling. With these models, the encoder shaft is directly connected to the measured shaft. During angular acceleration of the shaft, the stator coupling must absorb only the torque arising from friction within the bearing. ECN/EQN/ERN rotary encoders thus exhibit excellent dynamic performance and a high natural frequency.

Benefits of the stator coupling:

- No axial mounting tolerance between the shaft and stator housing
- High natural frequency of the coupling
- High torsional rigidity of shaft couplingMinimized space requirement for
- external and internal mounting
 Easy axial mounting
- Easy axial mounting

Mounting the ECN/EQN 1100 and ECN/EQN/ERN 1300

The blind hollow shaft or the tapered shaft of the rotary encoder is connected at the encoder's front face to the measured shaft by way of a central screw. Proper centering onto the motor shaft is accomplished via the hollow shaft or tapered shaft. On its stator side, the ECN/EQN 1100 is connected to a plane surface with two clamping screws (without a centering collar). The stator side of the ECN/EQN/ERN 1300 is clamped in a mating hole with an axial screw. The versions with fault exclusion feature an additional nose for a positive lock in the stator.

Mounting accessories


ECN/EQN/ECI/EQI 1100: Mounting aid


For turning the encoder shaft from the rear. This facilitates finding the positive-locking connection between the encoder and the measured shaft. ID 821017-03

ERN/ECN/EQN 1300: Inspection tool For inspecting the shaft connection (fault exclusion for rotor coupling). ID 680644-01

HEIDENHAIN recommends inspecting the holding torque of non-positive-locking shaft connections (e.g., tapered shafts, blind hollow shafts).

The inspection tool is screwed into the M10 back-off thread from the rear of the encoder. Due to the short thread engagement, the fastening screw for the shaft is not touched. With the motor shaft locked in place, the testing torque is applied to the extension by means of a torque wrench (hexagonal, width A/F: 6.3 mm). After any nonrecurring settling, it must be ensured that there is no relative motion between the motor shaft and the encoder shaft.

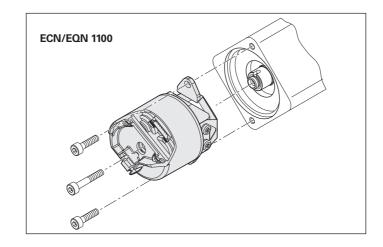

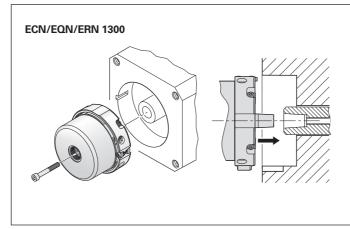

Mounting the ECN/EQN/ERN 1000 and ERN 1x23

The hollow shaft of these rotary encoders is slid onto the measured shaft and clamped on the rotor side with two screws. These encoders are mounted on the stator side without a centering flange onto a plane surface via four clamping screws or via two clamping screws and washers. The ECN/EQN/ERN 1000 encoders have a blind hollow shaft, but the ERN 1123 has a hollow through shaft.


Accessory for ECN/EQN/ERN 1000

Washer

For increasing the natural frequency $f_{\rm N}$ when fastening with only two screws. ID 334653-01 (2 washers)





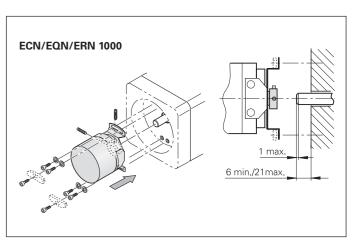

ECI/EBI/EQI rotary encoders without integral bearing

Schematic

ECI/EBI 100

representation of

Mounting the ECI 119

The ECI/EBI/EQI inductive encoders have no integral bearing. This means that the mounting and operating conditions influence the encoder's function reserves. It is also essential to ensure that the specified mating dimensions and tolerances are maintained for all operating conditions (see mounting instructions).

The application analysis must yield values within specification for all possible operating conditions (particularly under maximum load and at minimum and maximum operating temperature) and with the signal amplitude taken into account (inspection of the scanning gap and mounting tolerance at room temperature). This particularly applies to the following determined factors:


- Maximum radial runout of the motor shaft • Maximum axial runout of the motor shaft
- relative to the mounting surface • Maximum and minimum scanning gap (a), including in combination with, for example, the following:
- -The length ratio between the motor shaft and the motor housing under the influence of temperature $(T_1; T_2; \alpha 1; \alpha 2)$, depending on the position of the fixed bearing (b)
- -The bearing play (C_X)
- Non-dynamic shaft offsets due to load (X₁)
- -The effect of the motor brakes being engaged (X₂)

The ECI/EBI 100 rotary encoders are pre-aligned on a plane surface and, with their hollow shaft locked, are slid onto the measured shaft. Fastening and shaft clamping are achieved with axial screws.


The ECI/EBI/EQI 1100 inductive rotary encoders are mounted flush on their axis. Their blind hollow shaft is fastened with a central screw. The stator of these rotary encoders is clamped onto a shoulder with two axial screws.

> Mounting the ECI/EQI 1100

Mounting accessory Mounting aid for removing the PCB connector (see page 42).

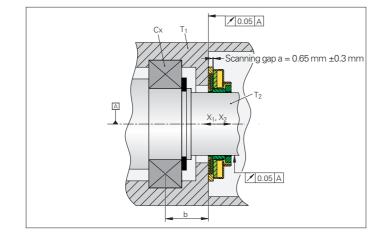



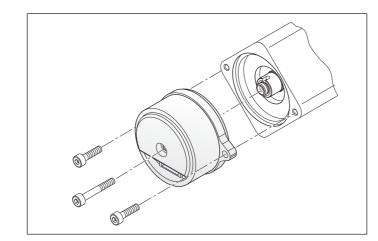

Permissible scanning gap

The size of the scanning gap between the rotor and the stator is dictated by the mounting situation. Later adjustment is possible only through the insertion of shim rings.

The maximum permissible error specified in the mating dimensions applies to both mounting and operation. Thus, the tolerances exploited during mounting are no longer available during operation.

Once the encoder has been mounted, the actual scanning gap between the rotor and the stator can be indirectly measured with the PWM 21 adjusting and testing package using a signal amplitude inside the rotary encoder. The characteristic curves illustrate the relationship between the signal amplitude and the deviation from the ideal scanning gap under different ambient conditions.

The example of the ECI/EBI 1100 shows the resulting deviation from the ideal scanning gap for a signal amplitude of 80% under ideal conditions. Due to tolerances within the rotary encoder, the deviation is between +0.03 mm and +0.2 mm. Thus, the maximum permissible motion of the measured shaft during operation ranges from -0.33 mm to +0.1 mm (green arrows).

60 20 ECI 1118/ -0.4 -0.3 EBI 1135 with EnDat 2.2 220 in % 180 Amplitude 140 100

60

20

ECI/EBI 100

Function reserves

-0.4

-0.3

260

220

180

140

100

Amplitude in %

Display of the scanning gap


The latest generation of encoders supports the display of the mounting dimension in the ATS software. This additional data can also be requested by the drive during closed-loop operation.


Absolute track Minimum 100 % at 1324 rev. 337°
Incremental- or sampling track Minimum 100 % at 1324 rev. 337°
Position-value formation ▲ Minimum 100 % at 1324 rev. 337°
Mounting diagnostics
Mounting disgnostics


Minimum 1	.041 mm	at 1324	rev. 3

ID	Exl mounting wizard	Mounting interface
728563-xx	\checkmark	
820725-xx	\checkmark	
1164809-xx		\checkmark
1164811-xx		\checkmark
1164812-xx		\checkmark
1164813-xx		\checkmark

ID	Exl mounting wizard	Mounting interface
811811-xx	\checkmark	
811815-xx	\checkmark	
810661-xx		\checkmark
810662-xx		\checkmark
823405-xx	\checkmark	
823406-xx	\checkmark	
823407-xx	\checkmark	

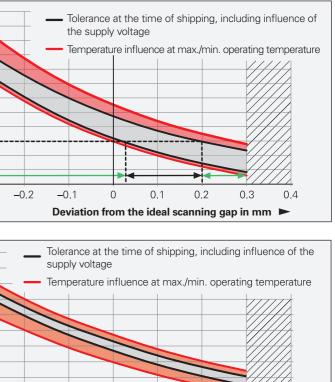



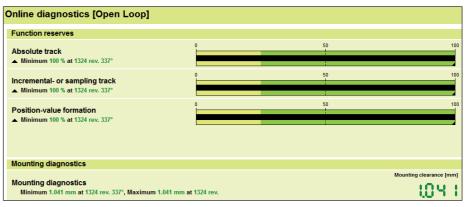

ID	Exl mounting wizard	Mounting interface
1259551-xx		\checkmark
1259552-xx		\checkmark
1286377-xx		\checkmark
1286388-xx		\checkmark


ERO rotary encoders without integral bearing


The ECI/EBI/EQI 1300 inductive rotary encoders are mounted flush on their axis. Their blind hollow shaft is fastened with a central screw. The stator of these rotary encoders is clamped to a shoulder by three axial screws.



The scale drum of the ECI/EBI 4000

inductive rotary encoders is slid onto the centering collar of the measured shaft and fastened (with/without a key, depending on the version). Then the stator is fastened via an external centering diameter.

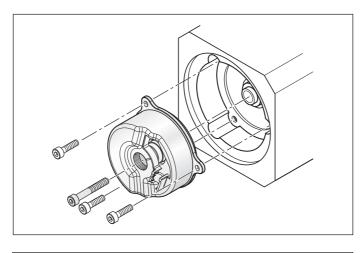

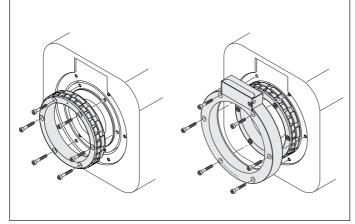

Mounting the ECI/EBI 4000

The **ERO** rotary encoders without an integral bearing consist of a scanning head and a graduated disk that must be brought into mutual alignment during mounting. Precise alignment is an important factor in reaching the attainable measuring accuracy.

The **ERO** modular rotary encoders consist of a disk/hub assembly and a scanning unit. These encoders are particularly well suited for limited installation space, low axial offsets, and low radial runout, or for applications where friction of any type must be avoided.

In the ERO 1200 series, the disk/hub assembly is pressed onto the shaft and brought into alignment with the scanning unit. The scanning unit is aligned on a centering collar and fastened to the mounting surface.

The encoders of the **ERO 1400** series are miniaturized modular rotary encoders. These encoders feature a special built-in mounting aid that centers the graduated disk relative to the scanning unit and adjusts the gap between the graduated disk and the scanning reticle. Short installation time can thus be attained. The encoder comes with a cover cap for protection against extraneous light.

Mounting accessories for the ERO 1400

Mounting accessory


Aid for removing the clip in order to achieve optimal encoder mounting. ID 510175-01


Accessory

Housing for the ERO 14xx with an axial PCB connector and central hole. ID 331727-23

> Mounting accessories for the ERO 1400

Mounting the ERO

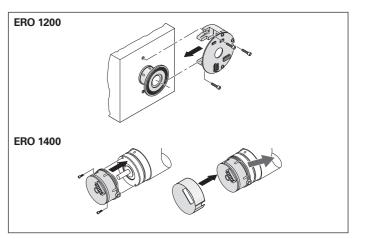

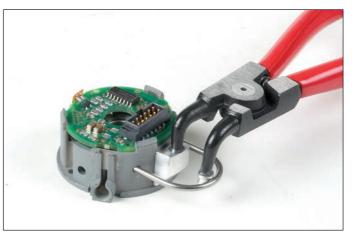

Information on output cables

General testing accessories for modular encoders and the PWM 21

Mounting and commissioning must be performed with appropriate ESD protection. Do not engage or disengage the connecting element when it is under power. To avoid overstressing the individual wires during disengagement of the connecting element, HEIDENHAIN recommends using the mounting aid for disconnecting the PCB connector.

Strain relief

Avoid torque or tensile stress, and use strain relief wherever necessary.

Straight M12 flange socket

Retention force of polarizing kev: max. 1 Nm.

Screws

For output cables with standard M12 or M23 flange sockets, use M2.5 screws.

The mounting method with M2.5 screws was designed for the following tightening torques For M12, M23: 0.4 Nm min. T_t max. T_t 0.5 Nm Load-bearing thread length: min. 4 mm Minimum tensile strength 800 N/mm² of the screws:

To prevent self-loosening of the screws, HEIDENHAIN recommends using a material bonding threadlocker.

Designation of the cable components

Accessory

Mounting aid for disengaging the PCB connector. Suitable for all rotary encoders in this brochure, except for the ERO 1200 series (ID 1075573-01).

To avoid damaging the cable, apply pulling force only to the connector and never to the wires. For other encoders, use tweezers or the mounting aid as needed.

Cable length (rated length)

For output cables with a crimp on the encoder side for strain relief and a shield contact, the cable length is specified up to the crimp sleeve. Exceptions apply, for example, to output cables without a crimp on the encoder side and to those with a sensor connection at the subsequent electronics or with a shield connection clamp. Upon request, you can obtain binding information (a dimension drawing) corresponding to the ID number of the respective output cable (see Cables and connecting elements).




Mounting aid for PCB connector

Electromagnetic compatibility


Cables from HEIDENHAIN are tested for electromagnetic compatibility. For output cables with wires for temperature sensors, electromagnetic compatibility must be ensured in the entire system.

Crimp connector

For joining (crimping) the wires of the temperature-sensor output cable to the wires of the temperature sensor inside the motor (ID 1148157-01).

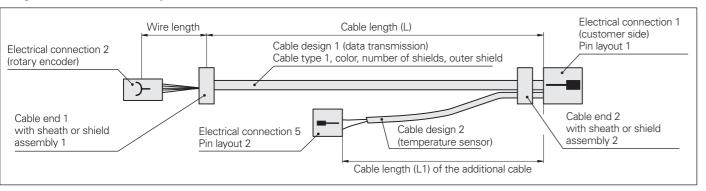

Temperature sensor signals via electrical connection 1

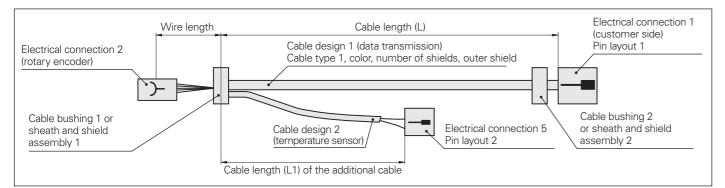

Temperature sensor signals via rotary encoder PCBA

Testing cable for directly connecting a modular rotary encoder to a PWM 21

Testing cable for modular rotary encoders with EnDat (EnDat22, EnDat01, or E30-R2) or SSI interface

Includes three 12-pin adapter connectors and three 15-pin adapter connectors. ID 621742-01

Connecting cable for EnDat or SSI interface

For extending the testing cable; completely assembled with a 15-pin D-sub connector (male) and a 15-pin D-sub connector (female), max. 3 m. ID 1080091-xx

Testing cable for modular rotary

encoders with DRIVE-CLiQ interface Includes three 12-pin adapter connectors and three 15-pin adapter connectors. ID 621742-01

Only in connection with:

Adapter cable for DRIVE-CLiQ, Ø 6.8 mm 15-pin D-sub (female) and 6-pin RJ45 Ethernet connector with IP20 metal housing. ID 1228399-01

Adapter cables for connecting the flange socket on the motor to the PWM 21

Adapter cable Ø 6 mm

for the EnDat22 interface 9-pin M23 connector (female) 8-pin M12 coupling (male). ID 1136863-xx (ID 524599-xx is additionally required: 15-pin M12 (female) and 15-pin D-sub connector (male))

Adapter cables, Ø 6 mm/8 mm

8-pin M12 connector (female) 15-pin D-sub connector (male). ID 1036526-xx Ø 6 mm ID 1129753-xx Ø 8 mm

Adapter cable Ø 6.8 mm

for the DRIVE-CLiQ interface 9-pin M23 connector (female) 6-pin RJ45 Ethernet connector with IP20 metal housing. ID 1117540-xx

Adapter cable, Ø 6.8 mm

8-pin M12 connector (female) 6-pin RJ45 Ethernet connector with IP20 metal housing. ID 1093042-xx

Adapter connector* for ID 621742-01 Three connectors for replacement.

12-pin: ID 528694-01 15-pin: ID 528694-02 *Adapter connectors should be replaced after 500 connection cycles

Testing cable for the ERN 138xx, with commutation signals for sinusoidal commutation

Includes three 14-pin adapter connectors. ID 1118892-02

Connecting cable for ERN 1387 For extending the testing cable Completely assembled with 15-pin D-sub

connector (male) and 15-pin D-sub connector (female), max. 3 m. ID 675582-xx

Adapter connector for ID 1118892-02 Three connectors for replacement. ID 528694-04

EnDat 3 adapter (SA 1210)

Adapter for connecting an encoder with EnDat 3 (E30-R2) to the PWM 21 15-pin D-sub connector (male) and 15-pin D-sub connector (female) ID 1317260-01

Adapter cable Ø 8 mm for EnDat01, EnDat Hx, EnDat Tx, or SSI interface with incremental signals 17-pin M23 connector (female) and 15-pin D-sub connector (male).


ID 324544-xx

Adapter cable Ø 8 mm

12-pin M23 connector (female) 15-pin D-sub connector (male). ID 310196-xx

Adapter cable Ø 13.6 mm, version for HMC 6

five power wires, two brake wires, and six communication wires 15-pin D-sub connector (male). ID 1189174-xx



Testing cables for modular rotary encoders



EnDat 3 adapter (SA 1210)

M23 SpeedTEC hybrid connector (female),

Adapter cable Ø 9.3 mm EnDat 3 interface (E30-R2) for HMC 2, only in combination with EnDat3 adapter

M12 SpeedTEC hybrid connector (female), four power wires, two brake wires, and two communication wires 15-pin D-sub connector (male). ID 1189174-xx

Adapter cable Ø 9.3 mm

M23 SpeedTEC hybrid connector (female), four power wires, two signal wires, and two communication wires 15-pin D-sub connector (male). ID 1275291-xx

DRIVE-CLiQ is a registered trademark of Siemens AG.

SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH.

Mounting accessories


Compatible mounting dimensions


Mating dimensions and tolerances must be taken into account during the mounting of rotary encoders. Within some rotary encoder series, the mating dimensions may exhibit only slight differences or even be identical. Certain rotary encoders are therefore mounting-compatible with each other, allowing different encoders to be mounted to the same motor as the requirements dictate.

All dimensions, tolerances, and required mating dimensions are indicated in the dimension drawing of the respective series. Deviating values for rotary encoders with functional safety (FS) are provided in the corresponding Product Information documents.

All absolute rotary encoders of the ECN/EQN 1100FS, ECI/EQI 1100FS, ECI/EBI 1100, and ECI/EQI 1100 series are mounting-compatible within the respective series, exhibiting only minor differences in the permissible deviation between the shaft surface and coupling surface.

Some rotary encoders of the ERN 1300, ECN/EQN 1300, ECI/EBI/EQI 1300FS, and ECN/EQN 400 series are also mountingcompatible with each other and can be mounted to identical motors. Minor differences, such as the anti-rotation element and a limited tolerance for the inside diameter, must be taken into account.



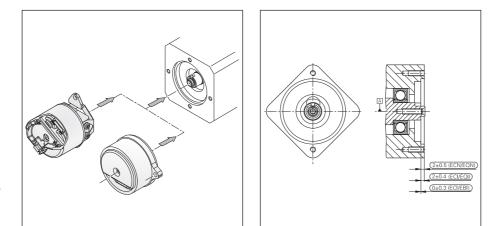

Series	Differences
ECN/EQN 1100FS	Standard, with slot for FS devices
ECI/EQI 1100FS	Same as ECN/EQN 1100 FS, but with a different tolerance for the deviation between the shaft and coupling surfaces
ECI 1118/EBI 1135	Same as ECN/EQN 1100 FS, but with a different tolerance for the deviation between the shaft and coupling surfaces
ECI 1119/EQI 1131	Same as ECN/EQN 1100 FS, but with a different tolerance for the deviation between the shaft and coupling surfaces

Series	Required mating dimensions			
	ERN 1300	ECN/ EQN 1300FS	ECI/EBI/ EQI 1300FS	ECN/ EQN 400FS
ERN 1300		\checkmark	\checkmark	\checkmark
ECN/EQN 1300FS			\checkmark	\checkmark
ECI/EQI 1300FS				
ECN/EQN 400FS		\checkmark	\checkmark	

Series	Differences
ERN 1300	Standard, deployable for taper shaft
ECN/EQN 1300	Same as ERN 1300, but with an additional ridge as an anti-rotation element (stator coupling)
ECI/EBI/EQI 1300FS	Same as ERN 1300, but with an anti-rotation element (flange)
ECN/EQN 400	Same as ECN/EQN 1300

Screwdriver bits

- For HEIDENHAIN shaft couplings • For ExN shaft clampings and stator
- couplings • For ERO shaft clampings

Width across flats	Length	ID
1.5	70 mm	350378-01
1.5 (spherical head)		350378-02
2		350378-03
2 (spherical head)		350378-04
2.5		350378-05
3 (spherical head)		350378-08
4		350378-07
4 (with dog point) ¹⁾		350378-14
	150 mm	756768-44
TX8	89 mm 152 mm	350378-11 350378-12
TX15	70 mm	756768-42



Screwdriver

torque tolerances.

1 Nm to 5 Nm

¹⁾ For DIN 6912 screws (low head screw with pilot recess)

Screws		
Screw	Securing method	ID
M3x8-8.8 ISO 4762 MKL	Material bonding anti-rotation lock	202264-67
M3x10-8.8 ISO 4762 MKL	Material bonding anti-rotation lock	202264-87
M3x16 A2 ISO 4762 KLF	Self-locking	202264-30
M3x20 A2 ISO 4762 KLF	Self-locking	202264-45
M3x22-8.8 ISO 4762 MKL	Material bonding anti-rotation lock	202264-65
M3x25-8.8 ISO 4762 MKL	Material bonding anti-rotation lock	202264-86
M3x25 A2 ISO 4762 KLF	Self-locking	202264-26
M3x35-8.8 ISO 4762 MKL	Material bonding anti-rotation lock	202264-66
M4x10-8.8 ISO 4762 MKL	Material bonding anti-rotation lock	202264-85
M5x25-8.8 DIN 6912 MKL	Material bonding anti-rotation lock	202264-55
M5x30-8.8 DIN 6912 MKL	Material bonding anti-rotation lock	202264-76
M5x35-8.8 ISO 4762 KLF	Self-locking	202264-80
M5x50-8.8 DIN 6912 KLF	Self-locking	202264-36
M5x50-8.8 DIN 6912 MKL	Material bonding anti-rotation lock	202264-54
Fastener kit • M3 fixing clamp • Spring washer: 3x0.70 DIN 128 A-FS ISO	Material bonding anti-rotation lock	20 pieces: 1264352-01 200 pieces:
Screw: M3x10 8.8 DIN EN ISO 4762		1264352-02

When using screwdrivers with adjustable torque, make sure that they comply with DIN EN ISO 6789 for fulfilling the required

Adjustable torque, with accuracy of ±6% 0.2 Nm to 1.2 Nm ID 350379-0 ID 350379-04 ID 350379-05



General information Alignment of rotor positions between encoders and motors

General mechanical information

Immediately after a synchronous motor is switched on, information is needed about its absolute rotor position. Rotary encoders with additional commutation signals are suitable for this task but provide comparatively rough position information. Absolute rotary encoders in singleturn or multiturn designs are also well suited, delivering the exact angular position down to an accuracy of a few arc seconds (see also Electronic commutation with position encoders). To achieve the most constant motor currents possible, the rotor positions of the motor and of the encoder must be brought into mutual alignment when the encoder is mounted. Inadequate alignment of the rotor positions will cause significant motor noise and high power dissipation.

First, the rotor of the motor is turned to the preferred position through the application of a DC current.

Rotary encoders with commutation

signals are then roughly aligned (e.g., using the line markers on the encoder or the reference mark signal) and are mounted to the motor shaft. Fine adjustment is then performed with the PWT 101 testing device (see Diagnostics, and inspection and testing equipment): the stator of the rotary encoder is turned until the PWT 101 displays a distance from the reference mark of nearly zero.


Absolute rotary encoders are first


completely mounted, after which a datum shift is used to assign the value "zero" to the preferred motor position. This is performed with the adjusting and testing package (see Diagnostics, and inspection and testing equipment). This package features complete EnDat functionality, allowing not only datum shifts but also the use of other inspection functions and the setting of write-protection to prevent unintentional changes to saved values.


For the ECI/EQI rotary encoders with additional 1 V_{PP} signals, manual adjustment is possible as well. Please follow the information in the respective mounting instructions.



Motor current of an encoder when aligned and significantly out of alignment





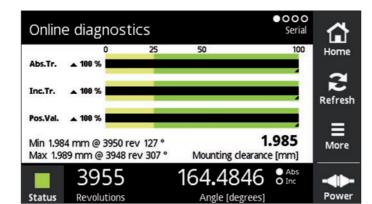

Online diagnostics of the PWT 101

Certification by NRTL (Nationally Recognized Testing Laboratory)

All of the rotary encoders in this brochure comply with the UL safety regulations for the U.S. and the CSA safety regulations for Canada.

Accelerations

During mounting and operation, encoders are subjected to various types of acceleration.

Vibration

The encoders are qualified on a test stand under the acceleration values stated in the specifications at frequencies of 55 Hz to 2000 Hz in accordance with EN 60068-2-6¹⁾. However, if the application or mounting situation causes long-duration resonant vibration, then proper functioning of the encoder may be impaired, or the encoder may incur damage.

Comprehensive testing of the entire system is therefore required.

• Shock

The encoders are qualified on a test stand under the acceleration values stated in the specifications and under the exposure times in accordance with EN 60068-2-27 for non-repetitive, semisinusoidal shock. Continuous shock loads are therefore not covered and must be tested in the application.

• The maximum angular acceleration is 10⁵ rad/s². This is the maximum permissible angular acceleration of the rotor without the encoder incurring damage. The actual attainable angular acceleration is within the same order of magnitude but can vary depending on the type of shaft connection (for deviating values for the ECN/ERN 100, see the Specifications). An adequate safety factor must be determined through system tests.

Deviating values for rotary encoders with functional safety are provided in the corresponding Product Information documents.

¹⁾ Information on values below 55 Hz is available upon request.

Natural frequencies

In conjunction with the stator coupling, the ECN/EQN/ERN rotary encoders form an oscillation-capable spring-mass system whose natural frequency f_N of the coupling should be as high as possible in the direction of measurement. The natural frequency of the coupling is influenced by the rigidity of the stator coupling and by the customer-side mounting situation. The stated typical natural frequencies may vary depending on the encoder variant (e.g., singleturn or multiturn), production tolerances, and differing mounting conditions. If radial and/or axial acceleration forces also come into play, then the rigidity of the encoder bearing and of the encoder stator has an effect as well. If such loads occur within your application, HEIDENHAIN recommends consulting with the main facility in Traunreut.

HEIDENHAIN generally recommends determining the natural frequency of the stator coupling in the complete system.

Humidity

The maximum permissible relative humidity is 75%. A relative humidity of 93% is temporarily permissible. Condensation is not permissible.

Magnetic fields

Magnetic fields > 30 mT can affect encoder functioning. Please contact HEIDENHAIN in Traunreut, Germany, as needed.

Acoustic noise

Running noise can occur during operation. This is particularly true of encoders with integral bearing and multiturn rotary encoders (with gears). The intensity may vary depending on the mounting situation and shaft speed.

Starting torque and operating torque

The starting torgue is the torgue required to put the rotor into motion from standstill. If the rotor is already rotating, then a certain operating torque is acting on the encoder. The starting torgue and operating torque are influenced by various factors, such as the temperature, prior standstill time, and the amount of wear on the bearings and seals.

The typical values stated in the specifications are mean values based on encoder-specific test series performed at room temperature and at a stabilized operating temperature. The typical operating torques are also based on constant shaft speeds. For applications in which the torgue has a significant influence, HEIDENHAIN recommends consulting with the main facility in Traunreut.

Protection against contact (EN 60529)

After completed installation, any rotating parts must be sufficiently protected from unintentional contact during operation.

Protection EN 60529

The ingress of contamination can impair proper functioning of the encoder. Unless otherwise indicated, all of the rotary encoders have an IP64 rating (ExN/ROx 400: IP67) in accordance with EN 60529. These specifications apply to the housing, cable outlet, and flange socket versions when engaged.

The shaft inlet meets an IP64 rating. Splash water must not be allowed to have any harmful effect on the encoder's parts. If the protection rating of the shaft inlet is not sufficient (e.g., due to vertical mounting of the encoder), then the encoders should be additionally protected with labyrinth seals. Many encoders are also available with an IP66 rating for the shaft inlet. Depending on the application, the radial shaft seal rings used for sealing are subjected to wear due to friction.

System tests

Encoders from HEIDENHAIN are usually integrated as components into complete systems. Such applications require comprehensive testing of the complete **system**, irrespective of the encoder's

specifications.

The specifications provided in this brochure apply only to the encoder and not to the complete system. Any operation of the encoder outside of the specified range or outside of its proper and intended use is solely at the user's own risk.

Mounting

The steps and dimensions that must be complied with during mounting are specified solely in the mounting instructions supplied with the device. All mounting-related information in this brochure is therefore only provisional and non-binding, and will not become the subject matter of a contract.

All provided information on screw connections assumes a mounting temperature of 15 °C to 35 °C.

Screws with material bonding anti-rotation lock

Mounting screws and central screws from HEIDENHAIN (not included in delivery) feature a coating that, after hardening, provides a material bonding anti-rotation lock. As a result, these screws cannot be reused. Their minimum shelf life is two years (storage at \leq 30 °C and \leq 65% relative humidity). Their expiration date is printed on the package.

Screw insertion and the application of tightening torque must therefore be completed within five minutes. The required strength is reached at room temperature after six hours. The lower the temperature is, the longer the curing process will take. Curing temperatures below 5 °C are not permissible. Screws with material bonding anti-rotation lock must not be used more than once. If a replacement becomes necessary, recut the threads and use new screws. On threaded holes, a chamfer is required in order to keep the adhesive coating from being scraped off.

For the fault exclusion design for functional safety, the following material properties and conditions for the mating surfaces are assumed:

	Aluminum	Steel	
Material type	Hardenable wrought aluminum alloy	Unalloyed hardened steel	
Tensile strength R _m	≥ 220 N/mm ²	≥ 600 N/mm ²	
Yield strength $R_{\rm p0.2}$ or yield point $R_{\rm e}$	Not applicable	≥ 400 N/mm ²	
Shear strength τ_a	≥ 130 N/mm ²	≥ 390 N/mm ²	
Interface pressure p _G	≥ 250 N/mm ²	≥ 660 N/mm ²	
Modulus of elasticity E (at 20 °C)	70 kN/mm ² to 75 kN/mm ²	200 kN/mm ² to 215 kN/mm ²	
Coefficient of thermal expansion α _{therm} (at 20 °C)	$\leq 25 \cdot 10^{-6} \text{K}^{-1}$	$10 \cdot 10^{-6} \text{K}^{-1}$ to 17 \cdot 10^{-6} \text{K}^{-1}	
Surface roughness Rz	≤ 16 µm		
Friction values	Mounting surfaces must be clean and free of grease. Use screws from HEIDENHAIN in their delivery condition.		
Tightening procedure	Use a signal-emitting torque wrench in accordance with DIN EN ISO 6789, with an accuracy of $\pm 6\%$		
Mounting temperature	15 °C to 35 °C		

Rotary encoders may exert a torque of up to 1 Nm on the mating shaft. The customer-side mechanical design must be made for this load. The respective Product information documents will describe any other prerequisites.

Modifications to the encoder

The proper functioning and accuracy of encoders from HEIDENHAIN are ensured only if the encoders have not been modified. Any modification, even a minor one, can impair the proper functioning, reliability, and safety of the encoders, and result in a loss of warranty. This also includes the use of any additional or nonprescribed locking varnishes, lubricants (e.g., for screws), or adhesives. If you are in doubt, we recommend that you consult with HEIDENHAIN in Traunreut, Germany.

Conditions for longer storage periods

For a storage period of twelve months or longer, HEIDENHAIN recommends the following:

- Leave the encoders in their original packaging
- The storage location should be dry, free of dust, and temperature-regulated. It should also be free of vibration, mechanical shock, and chemical environmental influences
- Every twelve months, rotate the shafts of the encoders with integral bearing at low speed and without axial or radial shaft loading so that the bearing lubrication becomes evenly redistributed (e.g., such as when first breaking in an encoder)

Parts subject to wear

Encoders from HEIDENHAIN are designed for a long service life. Preventive maintenance is not required. However, they do contain components that are subject to wear, depending on the application and how they are deployed. This especially applies to cables that are subjected to frequent flexing. Other parts subject to wear are the bearings in encoders with integral bearing, the radial shaft seal rings in rotary encoders and angle encoders, and the sealing lips on sealed linear encoders.

In order to avoid damage from current flows, some rotary encoders are available with hybrid bearings. In general, these bearings exhibit greater wear at high temperatures than standard bearings.

Service life

Unless otherwise specified, HEIDENHAIN encoders are designed for a service life of 20 years, which is equivalent to 40000 operating hours under typical operating conditions.

Temperature ranges

For encoders still in their packaging, a storage temperature range of -30 °C to 65 °C applies (HR 1120: -30 °C to 70 °C). The operating temperature range specifies the temperatures that a rotary encoder is permitted to reach during operation in the actual installation environment. Within this range, proper functioning of the rotary encoder is ensured. The operating temperature is measured at the defined measuring point (see dimension drawing) and must not be confused with the ambient temperature.

influenced by the following factors: Installation situation

- Ambient temperature
- Encoder self-heating

An encoder's susceptibility to self-heating depends both on its design characteristics (stator coupling / solid shaft, shaft sealing ring, etc.) and on its operating parameters (shaft speed, supply voltage). A temporary period of intensified self-heating can also occur after very long breaks in operation (of several months). Please allow for a twominute break-in period at low shaft speeds. The greater susceptibility to self-heating that an encoder exhibits, the lower the ambient temperature needs to be in order to keep the encoder within its permissible operating temperature range.

This table shows the approximate selfheating values to be expected for the rotary encoders. In the worst case, the amount of self-heating may be affected by multiple operating parameters, such as a 30 V supply voltage and maximum shaft speed. Thus, if an encoder is being operated close to its maximum permissible specifications, then the actual operating temperature should be measured directly at the encoder. Suitable measures must then be taken (fan, heat sinks, etc.) to sufficiently reduce the ambient temperature so that the maximum permissible operating temperature will not be exceeded during continuous operation.


For high shaft speeds at the maximum permissible ambient temperature, special versions with a reduced protection rating are available (without a radial shaft seal ring and its concomitant frictional heat).

The temperature of the rotary encoder is

Self-heating at shaft speed nmax

I Max	
Solid shaft / tapered shaft ExN 400/1300	\approx + 5 K ≈ +10 K for IP66 protection
Blind hollow shaft ECN/EQN/ ERN 400/1300	\approx + 30 K \approx +40 K for IP66 protection
ECN/EQN/ ERN 1000	Approx. +10 K
Hollow through shaft ECN/ERN 100 ECN/EQN/ERN 400	≈ +40 K for IP64 protection ≈ +50 K for IP66 protection

Typical self-heating values of a rotary encoder at maximum permissible shaft speed based on its design characteristics. The relationship between shaft speed and heat generation is nearly linear.



Measuring the actual operating temperature at the defined measuring point of the rotary encoder (see Specifications)

Electrical resistance

Temperature measurement in motors

Encoders with an integral bearing, pluggable output cable, and standard bearing

Check the resistance between the flange socket and the rotor. Nominal value: < 1 ohm


Encoders with hybrid bearing or EnDat 3 (E30-R2)


Check the resistance between the flange socket and the rotor **a**), and between the flange socket and the stator (metal housing) b). Nominal value: < 1 ohm

Exposed encoders (Exl 100) without integral bearing but with a pluggable cable

Check the electrical resistance between the flange socket and the rotor **a**), and between the flange socket and the stator (mounting screw) b). Nominal value: < 1 ohm

M12/M23



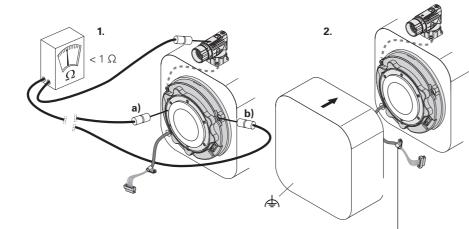

Clamp must be screwed to the motor housing so as to be conductive.

(D) Further information:

When connecting an external temperature

sensor, please refer to the information

about electromagnetic compatibility in

of the Interfaces of HEIDENHAIN

Encoders brochure.


the General electrical information section


Exposed encoders (Exl 4000) without an integral bearing but with a pluggable output cable

Check the electrical resistance between the flange socket and the rotor **a**), the flange socket and the stator **b**), and the flange socket and the crimp sleeve c). Nominal value: < 1 ohm

Exposed encoders (Exl 1100, Exl 1300) without an integral bearing but with a pluggable output cable

Check the resistance between the flange socket and the rotor **a**), and between the flange socket and the stator (metal housing) b). Nominal value: < 1 ohm



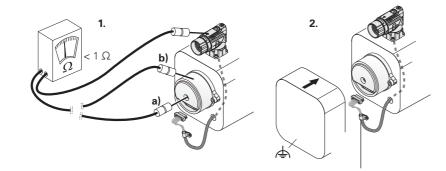

Clamp (when present) must be screwed to the motor housing so as to be conductive.

Transmission of temperature values

To protect the motor from overloads, the motor manufacturer usually monitors the temperature of the motor winding. In classic applications, the temperature sensor data are sent via two separate lines to the subsequent electronics, where they are then evaluated. Depending on their version, HEIDENHAIN rotary encoders with the EnDat 2.2, EnDat 3, or DRIVE-CLiQ interface feature an internal temperature sensor integrated into the encoder electronics and an evaluation circuit for connection to an external temperature sensor. In both cases, the respective digitized measured temperature value is transmitted purely serially over the interface protocol. As a result, no separate lines are needed from the motor to the motor controller.

Signaling of a temperature exceedance

When it comes to the internal temperature sensor, such rotary encoders can support the dual-level cascaded signaling of a temperature exceedance. This signaling consists of a warning (only EnDat) and an error message

The integrated memory can be read to determine whether the respective encoder supports this warning and error message functionality.

The warning threshold for the internal temperature sensor can be individually adjusted. At the time the encoder is shipped, a default value equivalent to the maximum permissible operating temperature is stored here (temperature at measuring point M1 as per the dimension drawing). The temperature measured by the internal temperature sensor is higher by a devicespecific amount than the temperature at measuring point M1.

The encoder features a further, albeit nonadjustable trigger threshold for the internal temperature sensor; an error message is output when this threshold is reached. This trigger threshold is device-specific and, if present, is stated in the specifications.

Encoder	Interface	Internal temperature sensor ¹⁾	External temperature sensor Connection
ECI/EQI 1100	EnDat22 E30-R2	√ (±1 K)	Possible
ECI/EBI 1100	EnDat22	√ (±5 K)	-
ECN/EQN 1100	EnDat22	√ (±5 K)	Possible
	EnDat01	-	-
	DQ	√ (±7 K)	Possible (±7 K)
ECN/EQN 1300	EnDat22	✓ (±4 K)	Possible
	E30-R2	✓ (±1 K)	-
	EnDat01	-	-
	DQ01	✓ (±7 K)	Possible
ECN/EQN 400	EnDat22	✓ (±4 K)	Possible
	EnDat01	-	-
ECI/EBI/EQI 1300	EnDat22	✓ (±1 K)	Possible
ECI/EQI 1300	E30-R2	✓ (±1 K)	Possible
ECI/EQI 1300S	DQ		
ECI/EBI 100	EnDat22	✓ (±4 K)	Possible
	EnDat01	-	-
ECI/EBI 4000	EnDat22	✓ (±1 K)	Possible

¹⁾ In parentheses: accuracy at 125 °C

HEIDENHAIN recommends adjusting the warning threshold based on the application such that this threshold is sufficiently below the trigger threshold for the "Temperature exceeded" error message. Compliance with the operating temperature at measuring point M1 is also required for adherence to the encoder's proper and intended use.

For more information on configuring and reading the temperature information, please refer to the respective Application Notes: EnDat 2.2: Document 722024 Document 3000005 EnDat 3: DRIVE-CLiQ: Document 1236334


Further information:

When connecting an external temperature sensor, please refer to the information about electromagnetic compatibility in the General electrical information section of the Interfaces of HEIDENHAIN Encoders brochure.

Information on connecting an external temperature sensor

- The external temperature sensor must comply with the following requirements as per EN 61800-5-1:
- Voltage class A
- Contamination level 2 – Overvoltage category 3
- Connect only passive temperature sensors.
- The connections for the temperature sensor are galvanically connected with the encoder electronics.
- Depending on the application, the temperature sensor assembly (sensor + cable assembly) must be mounted such that it is insulated from its environment with double or reinforced insulation.
- The accuracy of the temperature measurement depends on the temperature range.
- Take into account the tolerance of the temperature sensor.
- The transmitted temperature value is not a safe value in terms of functional safety.
- The motor manufacturer is responsible for the quality and accuracy of the temperature sensor, as well as for ensuring electrical safety.
- Use a crimp connector with a suitable temperature range (e.g., up to 150 °C ID 1148157-01).

For encoders with E30-R2 and DRIVE-CLiQ interface, the encoder can be configured for the connected temperature sensor. The correct temperature value is then output directly over the interface.

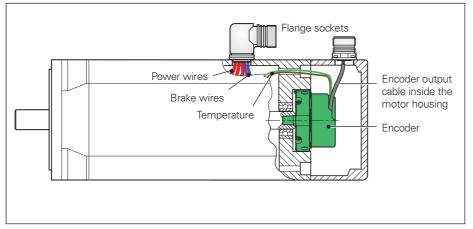

Cable configuration of the temperature wires in the motor

The accuracy of the temperature measurement depends on the sensor being used and on the temperature range.

	KTY 83-110	KTY 84-130	PT 1000
–40 °C to +80 °C	±6 K	±6 K	±6 K
80.1 °C to 160 °C	±3 K	±3 K	±4 K
160.1 °C to 200 °C	±6 K	±6 K	±6 K

Specifications for the evaluation				
Resolution	0.1 K (with KTY 84-130)			
Supply voltage of sensor	3.3 V over dropping resistor R _V = 2 k Ω			
Measuring current (typical)	1.2 mA at 595 Ω 1.0 mA at 990 Ω			
Total delay of temperature evaluation ¹⁾	160 ms max.			
Cable length ²⁾ With wire cross section of 0.16 mm ² for TPE, or 0.25 mm ² for cross-linked polyolefine	≤ 1 m			


¹⁾ Filter time constants and conversion time are taken into account; the time constants / response delay of the temperature sensor and the time lag for reading via the encoder interface are not included in this.

²⁾ Limitation of the cable length due to interference; the measuring error due to the line resistance is negligible.

Connectable temperature sensors

With EnDat22 encoders, the temperature evaluation performed within the rotary encoder is designed for a KTY 84-130 PTC thermistor. For other temperature sensors, the output value (value in additional data 1) must be converted into a temperature value.

Figure 1 illustrates the relationship between the output value and the resistance of the temperature sensor. When a KTY 84-130 is used, the temperature value equals the output value. The value has an increment of 0.1 kelvins.

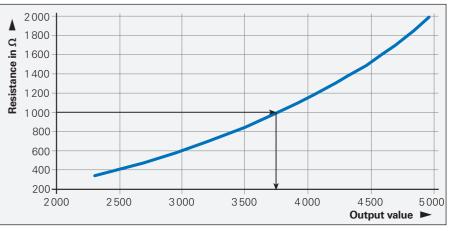

Example for the KTY 84-130 temperature sensor: which is equal to 375.1 K or 102 °C.

200°

40°

- PT1000

5000

9 4500

2 4000

Temperati 3200

2500

2000

Figure 2 illustrates the relationship for EnDat22 encoders between the output value and the temperature value for a PT 1000. In the graph, the temperature value for the PT 1000 can be determined based on the output value.

General notes on the evaluation:

- Output signals \leq 1151 indicate a short-circuit at the sensor input
- Output signals > 6000 indicate a high-impedance sensor input (e.g., due to a broken wire)

Notes on the conversion: The conversion for PT 1000 and KTY 83-110 must be performed for encoders that do

not inherently support this conversion.

PT 1000 and KTY 83-110

2000

Example for the PT 1000 temperature sensor: Output value = $3751 \rightarrow$ Temperature value = 2734 (equivalent to 0.3 °C).

Example for the KTY 83-110 temperature sensor: Output value = $3751 \rightarrow$ Temperature value = 2981 (equivalent to 25.0 °C). The following polynomial can be used to calculate the temperature value:

Temperature _{KTY83-110} = 3	5.1
--------------------------------------	-----

Figure 1: Relationship between the output value and resistance

Sensor resistance = 1000 $\Omega \rightarrow$ Output value (temperature value) 3751,

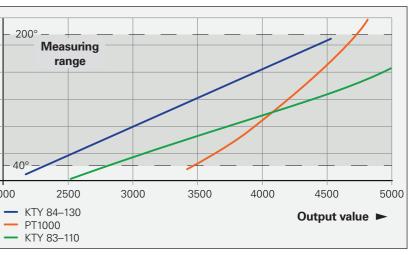


Figure 2: Relationship between the output value and the temperature value using the example of the

The following polynomial can be used to calculate the temperature value:

 $Temperature_{PT1000} = 1.3823 \cdot 10^{-7} \cdot A^3 - 1.2005 \cdot 10^{-3} \cdot A^2 + 4.6807 \cdot A - 5.2276 \cdot 10^3$

A = Output value. The PT 1000 polynomial is valid for: $3400 \le A \le 4810$.

 $3.007 \cdot 10^{-8} \cdot A^3 - 3.041 \cdot 10^{-4} \cdot A^2 + 1.786 \cdot A - 1.027 \cdot 10^3$


A = Output value. The KTY83-110 polynomial is valid for: $2880 \le A \le 5460$.

ECN/EQN 1100 series

Absolute rotary encoders

- 75A stator coupling for plane surface
- Blind hollow shaft
- Encoders available with functional safety



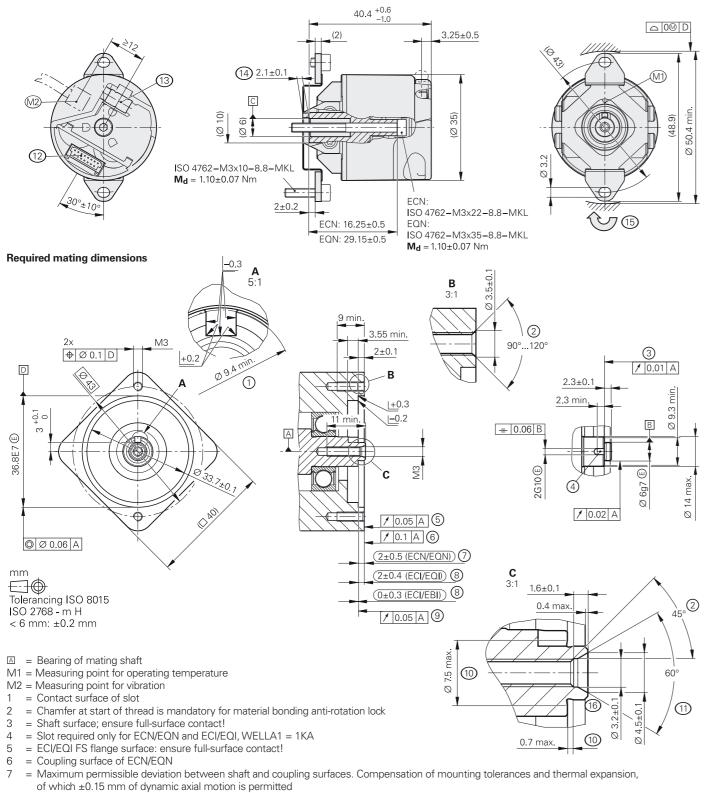

- = Maximum permissible deviation between the shaft surface and flange surface; compensation of mounting tolerances and thermal expansion 8 9 = ECI/EBI flange surface; ensure full-surface contact!
- 10 = Undercut
- 11 = Possible centering hole 12 = 15-pin PCB connector
- $13 = \text{Cable fastener with crimp sleeve; diameter: 4.3 mm \pm 0.1 mm; length: 7 mm$
- 14 = Positive locking element; ensure correct engagement in Slot 4 (e.g., by measuring the device overhang)
- 15 = Direction of shaft rotation for ascending position values
- 16 = Uncoated; shaft coating not permitted

	Absolute				
	ECN 1113	ECN 1123 ECN 1123S	EQN 1125	EQN 1135 EQN 1135 S Safety	
Interface	EnDat 2.2	ECN 1123: EnDat 2.2 EnDat 2.2 ECN 1123S: DRIVE-CLIQ EnDat 2.2		<i>EQN 1135:</i> EnDat 2.2 <i>EQN 1135S</i> :DRIVE-CLiQ	
Ordering designation	EnDat01	ECN 1123: EnDat22 ECN 1123S: DQ01	EnDat01	<i>EQN 1135</i> : EnDat22 <i>EQN 1135S</i> :DQ01	
Position values per rev.	8192 (13 bits)	8388608 (23 bits)	8192 (13 bits)	8388608 (23 bits)	
Revolutions	-		4096 (12 bits)		
Elec. permiss. shaft speed/ deviations ¹⁾	4000 rpm/±1 LSB 12000 rpm/±16 LSB	12 000 rpm (for continuous position value)	4000 rpm/±1 LSB 12000 rpm/±16 LSB	12 000 rpm (for continuous position value)	
Calc. t _{cal} / clock freq. ⁴⁾	\leq 9 µs / \leq 2 MHz	<i>ECN 1123:</i> ≤ 7 µs / ≤ 8 MHz	\leq 9 µs / \leq 2 MHz	<i>EQN 1135:</i> ≤ 7 µs / ≤ 8 MHz	
Calculation time TIME_MAX_ACTVAL ⁵⁾	-	<i>ECN 1123S:</i> ≤ 8 µs	-	<i>EQN 1135S:</i> ≤ 8 µs	
Incremental signals	\sim 1 V _{PP} ²⁾	-	\sim 1 V _{PP} ²⁾	-	
Line count	512	-	512	-	
Cutoff frequency –3 dB	≥ 190 kHz	-	≥ 190 kHz	-	
System accuracy	±60"	±60"			
Electrical connection	15-pin	15-pin ³⁾	15-pin	15-pin ³⁾	
Supply voltage	DC 3.6 V to 14 V	ECN 1123: DC 3.6 to 14 V DC 3.6 V to 14 V ECN 1123S:DC 10 to 28.8 V DC 3.6 V to 14 V		<i>EQN 1135:</i> DC 3.6 to 14 V <i>EQN 1135S</i> : DC 10 to 28.8 V	
Power consumption (maximum)	3.6 V: ≤ 0.6 W 14 V: ≤ 0.7 W	ECN 1123: 3.6 V: ≤ 0.6 W 14 V: ≤ 0.7 W ECN 1123 S: 10 V: ≤ 0.85 W 28.8 V: ≤ 0.9 W	3.6 V: ≤ 0.7 W 14 V: ≤ 0.8 W	$\begin{array}{c} EQN \ 1135: \ 3.6 \ V: \leq 0.7 \ W \\ 14 \ V: \leq 0.8 \ W \\ EQN \ 1135 \ S: \ 10 \ V: \leq 0.95 \ W \\ 28.8 \ V: \leq 1 \ W \end{array}$	
Current consumption (typical)	<i>5 V:</i> 85 mA (without load)			5 V: 105 mA (without load) 24 V: 35 mA (without load)	
Shaft	Blind hollow shaft Ø	6 mm with positive-locking ele	ment		
Mech. permiss. shaft speed n	12000 rpm				
Starting torque (typical)	0.001 Nm (at 20 °C)		0.002 Nm (at 20 °C)		
Moment of inertia of rotor	$\approx 0.4 \cdot 10^{-6} \text{ kgm}^2$				
Permissible axial motion of measured shaft	±0.5 mm				
Vibration 55 Hz to 2000 Hz Shock 6 ms	\leq 200 m/s ² (EN 600 \leq 1000 m/s ² (EN 600	68-2-6) 68-2-27)			
Max. operating temperature	115 °C	<i>ECN 1123:</i> 115 °C <i>ECN 1123S:</i> 95 °C	115 °C	EQN 1135: 115 °C EQN 1135S: 95 °C	
Min. operating temperature	–40 °C				
Protection EN 60529	IP40 (read about "insulation" under <i>Electrical safety</i> in the <i>Interfaces of HEIDENHAIN Encoders</i> brochure); contamination from the ingress of fluid must be prevented)				
Mass	≈ 0.1 kg	0.1 kg			
ID number	803427-xx			EQN 1135: 803430-xx EQN 1135 S:1211017-xx	
1)			4)		

¹⁾ Speed-dependent deviations between absolute and incremental signal

Absolute

- $^{2)}$ Deviating tolerances Signal amplitude: 0.80 V_{PP} to 1.2 V_{PP} $\,$ Asymmetry: Signal ratio: 0.9 to 1.1
- ³⁾ See Temperature measurement in motors

For dimensions and specifications of encoders with functional safety, see the Product Information document.


V <i>1123:</i> 803429-xx V <i>1123 S:</i> 1211015-xx	803428-xx	EQN 1135: 803430-xx EQN 1135 S:1211017-xx
emental signals Asymmetry: 0.05 Phase angle: 90° elec. ±!		to EnDat rotary encoders to DRIVE-CLiQ rotary encoders


ERN 1023


- Incremental rotary encoders


 Stator coupling for plane surface
 Blind hollow shaft
- Block commutation signals









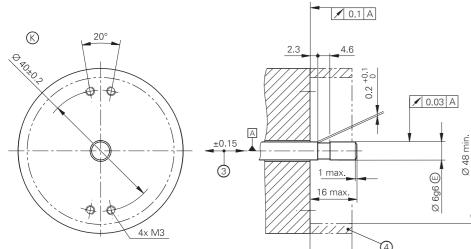

- 4 14 min.
- Bearing of mating shaft
 Required mating dimensions
 M = Measuring point for operating temperature
- $1 = \text{Two screws in clamping ring; tightening torque: 0.6 Nm \pm 0.1 Nm; width A/F 1.5$ $2 = Reference mark position \pm 10^{\circ}$
- a Resolution and position and
 b Compensation of mounting tolerances and thermal expansion, no dynamic motion permitted
 a Ensure protection against contact (EN 60529)
 b Direction of shaft rotation for ascending position values

	ERN 1023
Interface	
Signal periods per rev.*	500 512 600 1000 1024
Reference mark	One
Output frequency Edge separation <i>a</i>	≤ 300 kHz ≥ 0.41 μs
Commutation signals ¹⁾	TLITTL (3 commutation signals U, V, V
Width*	2 x 180° (C01); 3 x 120° (C02); 4 x 90° (
System accuracy	±260" ±130"
Electrical connection*	Cable 1 m, 5 m, without coupling
Supply voltage	DC 5 V ±0.5 V
Current consumption (without load)	≤ 70 mA
Shaft	Blind hollow shaft Ø 6 mm
Mech. permiss. shaft speed n	≤ 6000 rpm
Starting torque (typical)	0.005 Nm (at 20 °C)
Moment of inertia of rotor	$0.5 \cdot 10^{-6} \text{ kgm}^2$
Permissible axial motion of measured shaft	±0.15 mm
Vibration 25 Hz to 2000 Hz Shock 6 ms	\leq 100 m/s ² (EN 60068-2-6) \leq 1000 m/s ² (EN 60068-2-27)
Max. operating temperature	90 °C
Min. operating temperature	Fixed cable: –20 °C Moving cable: –10 °C
Protection EN 60529	IP64
Mass	\approx 0.07 kg (without cable)
ID number	684703-xx
Delli This and found and in the	- Talala and a stration of a s

Bold: This preferred version is available on short notice * Please select when ordering

¹⁾ Three square-wave signals with signal periods with 90°, 120°, or 180° mech. phase shift; see *Commutation signals for block commutation* in the *Interfaces of HEIDENHAIN Encoders* brochure


1250	2000	2048	2500	4096	5000	8192	
√)							
C03)							


ERN 1123


- Incremental rotary encoders


 Stator coupling for plane surface
- Hollow through shaft
- Block commutation signals









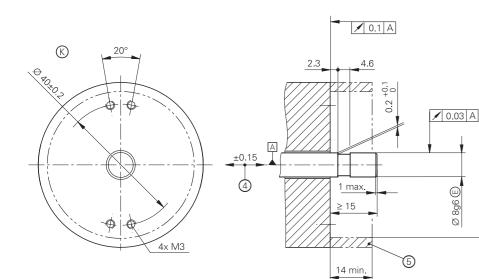

mm Tolerancing ISO 8015 ISO 2768 - m H < 6 mm: ±0.2 mm

- = Bearing of mating shaft
- B = Dealing of mating shart
 S = Required mating dimensions
 M = Measuring point for operating temperature
- 1
- = Two screws in clamping ring; tightening torque: $0.6 \text{ Nm} \pm 0.1 \text{ Nm}$; width A/F 1.5 = Reference mark position $\pm 10^{\circ}$
- 3 = 15-pin PCB connector

2

4 = Compensation of mounting tolerances and thermal expansion, no dynamic motion permitted
 5 = Ensure protection against contact (EN 60529)

00

Ø

- 6 = Direction of shaft rotation for ascending position values

	ERN 1123			
Interface				
Signal periods per rev.*	500 512 600	1000 10		
Reference mark	One	I		
Output frequency Edge separation <i>a</i>	≤ 300 kHz ≥ 0.41 μs			
Commutation signals ¹⁾	CUTTL (3 commutation sig	nals U, V, V		
Width*	2 x 180° (C01); 3 x 120° (C02); 4 x 90° ((
System accuracy	±260"	±130"		
Electrical connection	15-pin			
Supply voltage	DC 5V ±0.5V			
Current consumption (without load)	≤ 70 mA			
Shaft	Hollow through shaft (Ø 8 m	m)		
Mech. permiss. shaft speed n	≤ 6000 rpm			
Starting torque (typical)	0.005 Nm (at 20 °C)			
Moment of inertia of rotor	0.5 · 10 ⁻⁶ kgm ²			
Permissible axial motion of measured shaft	±0.15 mm			
Vibration 25 Hz to 2000 Hz Shock 6 ms	\leq 100 m/s ² (EN 60068-2-6) \leq 1000 m/s ² (EN 60068-2-27	')		
Operating temperature	–20 °C to 90 °C			
Protection EN 60529	IP00 ²⁾			
Mass	≈ 0.06 kg			
ID number	684702-xx			
	11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			

Bold: This preferred version is available on short notice

* Please select when ordering

24	1250	2000	2048	2500	4096	5000	8192	
√)								
C03)								

¹⁾ Three square-wave signals with signal periods with 90°, 120°, or 180° mech. phase shift; see *Commutation signals for block commutation* in the *Interfaces of HEIDENHAIN Encoders* brochure
 ²⁾ Electromagnetic compatibility must be ensured in the entire system


ECN/EQN 1300 series


Absolute rotary encoders

- 07B stator coupling with anti-rotation element for axial mounting
- 65B tapered shaft
- Encoders available with functional safety
- Fault exclusion for rotor coupling and stator coupling as per EN 61800-5-2 possible


19.5±1







50.5±1





5.5

Q

90°

8







> 12


6

Required mating dimensions



Tolerancing ISO 8015 ISO 2768 - m H ≤6 mm: ±0.2 mm





2

M1 = Measuring point for operating temperature

15

- M2 = Measuring point for vibration (see D741714)
- 1 = Clamping screw for coupling ring: width A/F 2; tightening torque: 1.25 Nm –0.2 Nm
- = Die-cast cover
- = Screw plug: widths A/F 3 and 4; tightening torque: 5 Nm +0.5 Nm 3
- = 16-pin header 4

2

A

 $(\overline{7})$

- = Screw: DIN 6912 M5x50 08.8 MKL; width A/F 4; tightening torque: 5 Nm +0.5 Nm 5
- 6 = M10 back-off thread
- = Compensation of mounting tolerances and thermal expansion; no dynamic motion permitted 7
- 8 = Chamfer at start of thread is mandatory for material bonding anti-rotation lock
- 9 = Direction of shaft rotation for ascending position values

	Absolute				
	ECN 1313	ECN 1325	EQN 1325	EQN 1337	
Interface	EnDat 2.2		I	Į	
Ordering designation	EnDat01	EnDat22	EnDat01	EnDat22	
Position values per rev.	8192 (13 bits)	33554432 (25 bits)	8192 (13 bits)	33554432 (25 bits)	
Revolutions	-		4096 (12 bits)		
Elec. permiss. shaft speed/ deviations ²⁾	512 lines: 5000 rpm/±1 LSB 12000 rpm/±100 LSB 2048 lines: 1500 rpm/±1 LSB 12000 rpm/±50 LSB	15000 rpm (for continuous position value)	512 lines: 5000 rpm/±1 LSB 12000 rpm/±100 LSB 2048 lines: 1500 rpm/±1 LSB 12000 rpm/±50 LSB	15000 rpm (for continuous position value)	
Calculation time t _{cal} Clock frequency	≤ 9 µs ≤ 2 MHz	≤ 7 μs ≤ 8 MHz	≤ 9 μs ≤ 2 MHz	≤ 7 μs ≤ 8 MHz	
Incremental signals	~ 1 V _{PP} ¹⁾	-	~ 1 V _{PP} ¹⁾	-	
Line count*	512 2048	2048	512 2048	2048	
Cutoff frequency –3 dB	<i>2048 lines:</i> ≥ 400 kHz <i>512 lines:</i> ≥ 130 kHz	-	2048 lines: ≥ 400 kHz 512 lines: ≥ 130 kHz	-	
System accuracy	512 lines: ±60"; 2048 lines: ±20"				
Electrical connection	12-pin	16-pin with connection for temperature sensor ³⁾	12-pin	16-pin with connection for temperature sensor	
Supply voltage	DC 3.6 V to 14 V		1		
Power consumption (maximum)	$3.6 V \le 0.6 W$ $14 V \le 0.7 W$		$3.6 V \le 0.7 W$ 14 V $\le 0.8 W$		
Current consumption (typical)	5 V: 85 mA (without load)		5 V: 105 mA (without lo	ad)	
Shaft	Tapered shaft Ø 9.25 m	m; taper 1:10	I		
Mech. permiss. shaft speed n	≤ 15000 rpm		≤ 12 000 rpm		
Starting torque (typical)	0.01 Nm (at 20 °C)		1		
Moment of inertia of rotor	$2.6 \cdot 10^{-6} \text{ kgm}^2$				
Natural frequency f _N (typical)	1800 Hz				
Permissible axial motion of measured shaft	±0.5 mm				
Vibration 55 Hz to 2000 Hz Shock 6 ms	\leq 300 m/s ^{2 4)} (EN 60068-2-6) \leq 2000 m/s ² (EN 60068-2-27)				
Operating temperature	–40 °C to 115 °C				
Protection EN 60529	IP40 when mounted				
Mass	≈ 0.25 kg				
ID number	768295-xx	683643-xx	827039-xx	683645-xx	

Deviating tolerances Signal amplitude: 0.8 Vpp to 1.2 Vpp Asymmetry: 0.05 Amplitude ratio: 0.9 to 1.1 Phase angle: 90° elec. ±5° elec. Signal-to-noise ratio E, F: ≥ 100 mV

For dimensions and specifications of encoders with functional safety, see the Product Information document.







- incremental signals
- 3) Evaluation optimized for KTY 84-130
- ⁴⁾ Valid as per standard at room temp.; the following applies at operating temps. up to 100 °C: \leq 300 m/s² up to 115 °C: \le 150 m/s²


ECN/EQN 1300 S series


Absolute rotary encoders

- 07B stator coupling with anti-rotation element for axial mounting
- 65B tapered shaft
- Encoders available with functional safety
- Fault exclusion for rotor coupling and stator coupling as per EN 61800-5-2 possible


19.5±1









50.5±1










> 12

Required mating dimensions



Tolerancing ISO 8015 ISO 2768 - m H ≤ 6 mm: ±0.2 mm





= Bearing of mating shaft

2 15

- M1 = Measuring point for operating temperature
- M2 = Measuring point for vibration (see D741714)
- 1 = Clamping screw for coupling ring: width A/F 2; tightening torque: 1.25 Nm -0.2 Nm
- 2 = Die-cast cover
- = Screw plug: widths A/F 3 and 4; tightening torque: 5 Nm +0.5 Nm 3
- 4 = 16-pin header

A

 $(\overline{7})$

- = Screw: DIN 6912 M5x50 08.8 MKL; width A/F 4; tightening torque: 5 Nm +0.5 Nm 5
- 6 = M10 back-off thread
- = Compensation of mounting tolerances and thermal expansion, no dynamic motion permitted 7
- 8 = Chamfer at start of thread is mandatory for material bonding anti-rotation lock
- 9 = Direction of shaft rotation for ascending position values

	Absolute			
	ECN 1324S Safety	EQN 1336S Safety		
Interface	DRIVE-CLiQ			
Ordering designation	DQ01			
Position values per rev.	16777216 (24 bits)			
Revolutions	-	4096 (12 bits)		
Shaft speed	 ≤ 15000 rpm (at ≥ 2 position requests per revolution) ≤ 12000 rpm (at ≥ 2 position requests per revolution) 			
Calculation time TIME_MAX_ACTVAL	≤ 8 µs	1		
Incremental signals	-			
System accuracy	±20"			
Electrical connection	16-pin with connection for temperature sensor ¹⁾			
Supply voltage	DC 10 V to 28 V			
Power consumption (maximum)	$10 V: \le 0.9 W$ $10 V: \le 1 W$ $28.8 V: \le 1 W$ $28.8 V: \le 1.1 W$			
Current consumption (typical)	24 V: 38 mA (without load) 24 V: 43 mA (without load)			
Shaft	Tapered shaft Ø 9.25 mm; taper 1:10	1		
Starting torque (typical)	0.01 Nm (at 20 °C)			
Moment of inertia of rotor	$2.6 \cdot 10^{-6} \text{ kgm}^2$			
Natural frequency f _N (typical)	1800 Hz			
Permissible axial motion of ±0.5 mm measured shaft				
Vibration 55 Hz to 2000 Hz Shock 6 ms	\leq 300 m/s ² (EN 60068-2-6) \leq 2000 m/s ² (EN 60068-2-27)			
Operating temperature	–30 °C to 100 °C			
Protection EN 60529	IP40 when mounted			
Mass	≈ 0.25 kg			
ID number	1179144-xx	1179145-xx		


For dimensions and specifications of encoders with functional safety, see the Product Information document.


¹⁾ Evaluation optimized for the KTY 84-130 and PT 1000 (see *Temperature measurement in motors*)


ECN/EQN 400 series


Absolute rotary encoders

- 07B stator coupling with anti-rotation element for axial mounting
- 65B tapered shaft
- Encoders available with functional safety
- Fault exclusion for rotor coupling and stator coupling as per EN 61800-5-2 possible









+0.1 (III)

. 65

Ø

🖊 0.02 A

7.5±0.1 → 1:10

< 10

15


≥22 25≤L≤35

> 12

ЧÐ A

(5)

Required mating dimensions



< 6 mm: ±0.2 mm

- A = Bearing of mating shaft
- M1 = Measuring point for operating temperature
- M2 = Measuring point for vibration (see D741714) 1 = Clamping screw for coupling ring: width A/F 2; tightening torque: 1.25 Nm –0.2 Nm
- Screw plug: widths A/F 3 and 4; tightening torque: 5 Nm +0.5 Nm
 Screw: DIN 6912 M5x50 08.8 MKL; width A/F 4; tightening torque: 5 Nm +0.5 Nm
- 4 = Back-off thread M10
- 5 = Compensation of mounting tolerances and thermal expansion; no dynamic movement permitted
 6 = Chamfer at start of thread is mandatory for material bonding anti-rotation lock
- 7 = Direction of shaft rotation for ascending position values

× 4:1 90° 6	

	Absolute				
	ECN 413	ECN 425 Safety	EQN 425	EQN 437 Safety	
Interface	EnDat 2.2			-	
Ordering designation	EnDat01	EnDat22	EnDat01	EnDat22	
Position values per rev.	8192 (13 bits)	33554432 (25 bits)	8192 (13 bits)	33554432 (25 bits)	
Revolutions	-		4096 (12 bits)		
Elec. permiss. shaft speed/ deviations ²⁾	1500 rpm/±1 LSB 12000 rpm/±50 LSB	15000 rpm (for continuous position value)	1500 rpm/±1 LSB 12000 rpm/±50 LSB	15000 rpm (for continuous position value)	
Calculation time t _{cal} Clock frequency	≤ 9 μs ≤ 2 MHz	≤ 7 μs ≤ 16 MHz	≤ 9 µs ≤ 2 MHz	≤ 7 μs ≤ 16 MHz	
Incremental signals	\sim 1 V _{PP} ¹⁾	-	~ 1 V _{PP} ¹⁾	-	
Line count	2048				
Cutoff frequency –3 dB	≥ 400 kHz	-	≥ 400 kHz	-	
System accuracy	±20"				
Electrical connection*	Cable (5 m) with or without M23 coupling	Cable (5 m) with M12 coupling	Cable (5 m) with or without M23 coupling	Cable (5 m) with M12 coupling	
Supply voltage	DC 3.6 V to 14 V	1	1		
Power consumption (maximum)	3.6 V: ≤ 0.6 W 14 V: ≤ 0.7 W		$3.6 V \le 0.7 W$ 14 V $\le 0.8 W$		
Current consumption (typical)	5 V: 85 mA (without load)		5 V: 105 mA (without loa	ad)	
Shaft	Tapered shaft Ø 9.25 mm; taper 1:10		1		
Mech. permiss. shaft speed n	≤ 15000 rpm		≤ 12 000 rpm		
Starting torque (typical)	0.01 Nm (at 20 °C)				
Moment of inertia of rotor	2.6 · 10 ⁻⁶ kgm ²				
Natural frequency f _N (typical)	1800 Hz				
Permissible axial motion of measured shaft	±0.5 mm				
Vibration 55 Hz to 2000 Hz Shock 6 ms	\leq 300 m/s ² (EN 60068 \leq 2000 m/s ² (EN 60068	-2-6) -2-27)			
Max. operating temp.	100 °C				
Min. operating temperature	Fixed cable: –40 °C Moving cable: –10 °C				
Protection EN 60529	IP64 when mounted				
Mass	≈ 0.25 kg				
ID number	1065932-xx	683644-xx	1109258-xx	683646-xx	
- , , , , , , , , , , , , , , , , , , ,	Asymmetry: 0 Amplitude ratio: 0	0.8 V _{PP} to 1.2 V _{PP} 0.05 0.9 to 1.1 0° elec. ±5° elec.			

Phase angle: ²⁾ Speed-dependent deviations between absolute and incremental signals

For dimensions and specifications of encoders with functional safety, see the Product Information document.



Absolute




ERN 1300 series

Incremental rotary encoders

- 06 stator coupling for axial mounting
- 65B tapered shaft



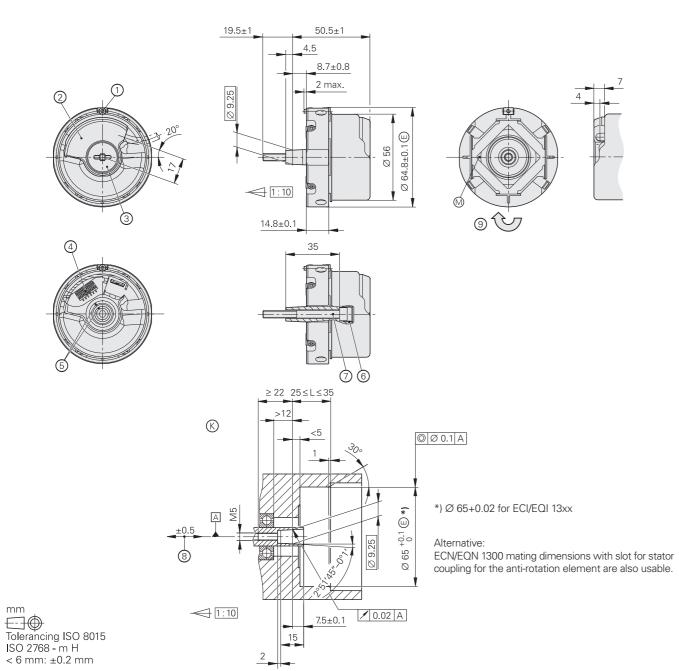

- A = Bearing of mating shaft
- © = Required mating dimensions
- M = Measuring point for operating temperature 1 = Clamping screw for coupling ring: width A/F 2; tightening torque: 1.25 Nm –0.2 Nm
- 2 = Die-cast cover
- a Screw plug: widths A/F 3 and 4; tightening torque: 5 Nm +0.5 Nm
 a = 12-pin, 14-pin, or 16-pin PCB connector
- 5 = Reference mark position on shaft and cap
- 6 = M10 back-off thread
- a Kilo back-off tiftead
 a Self-tightening screw as per ISO 6912 M5 x 50 08.8, width A/F 4; tightening torque: 5 Nm +0.5 Nm
 a Compensation of mounting tolerances and thermal expansion; no dynamic movement permitted
 b Direction of shaft rotation for ascending position values

	Incremental				
	ERN 1321	ERN 1381	ERN 1387	ERN 1326	
Interface		\sim 1 V _{PP} ¹⁾			
Line count*/ System accuracy	1024/±64" 2048/±32" 4096/±16"	512/±60" 2048/±20" 4096/±16"	2048/±20"	1024/±64" 2048/±32" 4096/±16"	8192/±16" ⁵⁾
Reference mark	One			-	
Output frequency Edge separation <i>a</i> Cutoff frequency –3 dB	≤ 300 kHz ≥ 0.35 µs -	- - ≥ 210 kHz		≤ 300 kHz ≥ 0.35 µs -	≤ 150 kHz ≥ 0.22 μs −
Commutation signals	-		\sim 1 V _{PP} ¹⁾		
Width*	-		Z1 track ²⁾	3 x 120°; 4 x 90° ³⁾	
Electrical connection	12-pin		14-pin	16-pin	
Supply voltage	DC 5V ±0.5V		DC 5 V ±0.25 V	DC 5 V ±0.5 V	
Current consumption (without load)	≤ 120 mA		≤ 130 mA	≤ 150 mA	
Shaft	Tapered shaft Ø 9.2	25 mm; taper 1:10	1		
Mech. permiss. shaft speed n	≤ 15000 rpm				
Starting torque (typical)	0.01 Nm (at 20 °C)				
Moment of inertia of rotor	$2.6 \cdot 10^{-6} \text{ kgm}^2$				
Natural frequency f _N (typical)	1800 Hz	1800 Hz			
Permissible axial motion of measured shaft	±0.5 mm				
Vibration 55 Hz to 2000 Hz Shock 6 ms	\leq 300 m/s ^{2 4)} (EN \leq 2000 m/s ² (EN 60	60068-2-6))068-2-27)			
Max. operating temperature	120 °C 120 °C 120 °C 4096 lines: 80 °C 120 °C				
Min. operating temperature	-40 °C				
Protection EN 60529	IP40 when mounted				
Mass	≈ 0.25 kg				
ID number	385423-xx	534118-xx	749144-xx	574485-xx	
Asym Ampli	itude ratio:	0.8 V _{PP} to 1.2 V _{PP} 0.05 0.9 to 1.1			

Phase angle:

Signal-to-noise ratio E, F: 100 mV

²⁾ One sine and one cosine signal per revolution; see the *Interfaces of HEIDENHAIN Encoders* brochure ³⁾ Three square-wave signals with signal periods with 90° or 120° mech. phase shift; see the *Interfaces of HEIDENHAIN Encoders* brochure ⁴⁾ Valid as per standard at room temperature; at operating temperatures up to 100 °C: \leq 300 m/s²; up to 120 °C: \leq 150 m/s²

90° elec. ±5° elec.

⁵⁾ Via integrated signal doubling

120	°C	


749144-xx	574485-xx
	749144-xx

ECI/EQI 1100 series

Absolute rotary encoders

- Flange for axial mounting
- Blind hollow shaft
- Without integral bearing



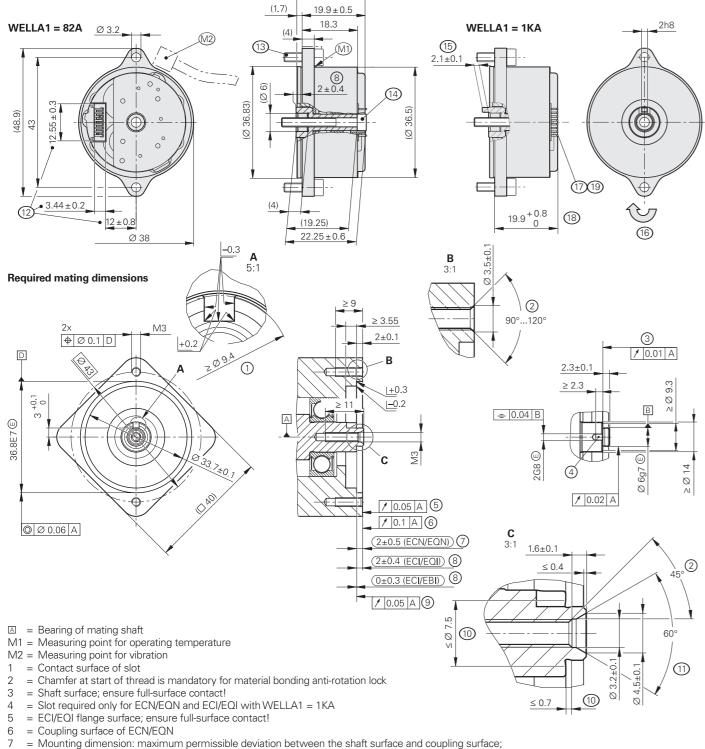

(21.6)

- compensation of mounting tolerances and thermal expansion, of which ±0.15 mm of dynamic axial motion is permitted (ECN/EQN) = Maximum permissible deviation between the shaft surface and flange surface; compensation of mounting tolerances and thermal expansion; 8
- dynamic motion permitted over entire range (ECI/EBI/EQI) 9 = ECI/EBI flange surface; ensure full-surface contact!
- 10 = Undercut
- 11 = Possible centering hole
- 12 = Distance to cover; note the opening for header, header connector, and wires
- 13 = Screw: ISO 4762 M3x10 8.8 MKL; tightening torque: 1 Nm ±0.1 Nm
- 14 = Screw: ISO 4762 M3x25 8.8 MKL; tightening torque: 1 Nm ±0.1 Nm
- 15 = Positive-locking element; ensure correct engagement in the slot (e.g., by measuring the device overhang)
- 16 = Direction of shaft rotation for ascending position values
- 17 = 15-pin header
- 18 = Dimension for JH standard cable 19 = Ensure installation space for cable
- 68



	Absolute, singleturn		Absolute, multitum		
	ECI 1119 Functional Safety		EQI 1131 Functional Safety		
Interface	EnDat 2.2	EnDat 3	EnDat 2.2	EnDat 3	
Ordering designation	EnDat22	E30-R2	EnDat22	E30-R2	
Position values per rev.	524288 (19 bits)	1		1	
Revolutions	_		4096 (12 bits)		
Calculation time t _{cal} Clock frequency	≤ 5 µs ≤ 16 MHz	-	≤ 5 μs ≤ 16 MHz	-	
XEL.time HPFout data rate	-	≤ 11 µs at 12.5 Mbit/s ≤ 8.2 µs at 25 Mbit/s	-	≤ 11 µs at 12.5 Mbit/s ≤ 8.2 µs at 25 Mbit/s	
Propagation time	-	14 µs (typical)	-	14 µs (typical)	
System accuracy	±120"		1	1	
Electrical connection	15-pin (with connection f	for external temperature s	ensor) ¹⁾		
Cable length	<i>EnDat 3:</i> ≤ 100 m at 12.5 <i>EnDat 2.2:</i> ≤ 100 m ²⁾	o Mbit/s;≤40 m at 25 Mbi	t/s		
Supply voltage	DC 3.6 V to 14 V				
Power consumption (maximum)	3.6 V: ≤ 0.65 W 14 V: ≤ 0.7 W	<i>12 V:</i> 45 mA (without communication)	3.6 V: ≤ 0.75 W 14 V: ≤ 0.85 W	<i>12 V:</i> 50 mA (without communication)	
Current consumption (typical)	5 V: 95 mA (without load)	$4 V \le 0.85 W;$ $14 V \le 0.9 W$	5 V: 115 mA (without load)	$4 V: \le 0.95 W;$ $14 V: \le 1 W$	
Shaft*	Blind hollow shaft for axial clamping \emptyset 6 mm without positive-locking element (82A) or with positive-locking element (1KA)				
Shaft speed	≤ 15000 rpm		≤ 12000 rpm		
Moment of inertia of rotor	$0.2 \cdot 10^{-6} \text{ kgm}^2$				
Angular acceleration of rotor	$\leq 1 \cdot 10^5 \text{ rad/s}^2$				
Permissible axial motion of measured shaft	±0.4 mm				
Vibration 55 Hz to 2000 Hz Shock 6 ms	Stator: \leq 400 m/s ² ; rotor: \leq 600 m/s ² (EN 60068-2-6) \leq 2000 m/s ² (EN 60068-2-27)		6)		
Operating temperature	-40 °C to 110 °C				
Trigger threshold of temperature exceedance error message	125 °C (measuring accuracy of the internal temperature sensor: ±1 K)				
Protection EN 60529	IP00 when mounted ³⁾				
Mass	≈ 0.04 kg				
	1164809-xx 1259551-xx		1	1259552-xx	

* Please select when ordering

¹⁾ EnDat22: Evaluation optimized for the KTY 84-130 temperature sensor; E30-R2: Evaluation optimized for the KTY 84-130 and PT 1000 (see Temperature measurement in motors)


- ²⁾ Also see the Interfaces of HEIDENHAIN Encoders brochure
- For dimensions and specifications of encoders with functional safety, see the Product Information document.

³⁾ See Electromagnetic compatibility under General electrical information in the Interfaces of HEIDENHAIN Encoders brochure.

ECI/EQI 1100 series

Absolute rotary encoders

- 70F synchro flange for axial mounting
- 82A blind hollow shaft
- Without integral bearing
- Mounting-compatible with ECN/EQN 1100 optical rotary encoders and the ECI/EBI/EQI 1100 inductive series 21.9±0.5

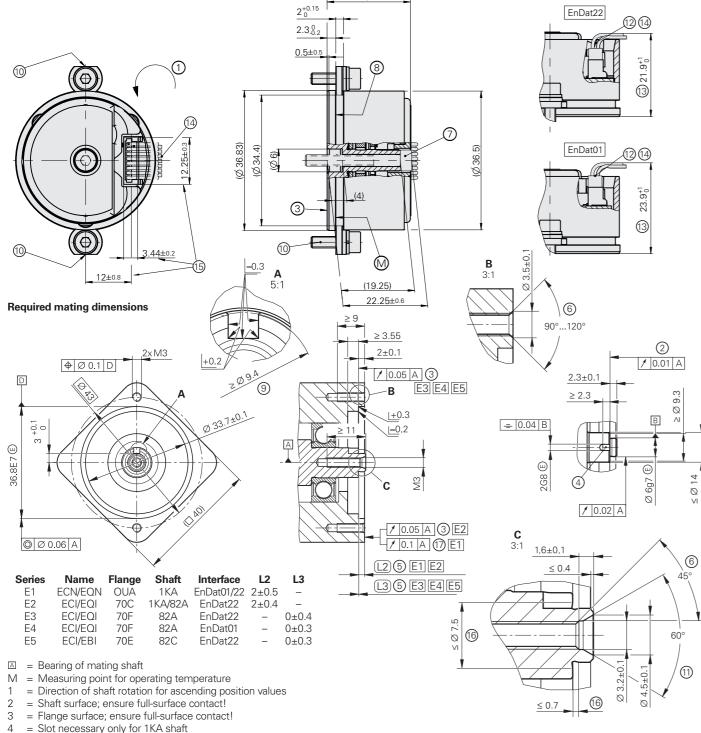

- = Slot necessary only for 1KA shaft
- 5 = Mounting dimension: maximum permissible deviation between the shaft surface and flange surface; compensation of mounting tolerances and thermal expansion; ECI/EQI/EBI: dynamic motion permitted over entire range; ECN/EQN: ±0.15 mm dynamic axial motion permitted (with use of ATS software for mounting inspection, the display value for the mounting clearance is shown as 2 mm instead of 0 mm)
- 6 = Chamfer at start of thread is mandatory for material bonding anti-rotation lock
- 7 = Shaft fastening screw: DIN EN ISO 4762 M3x25 8.8 with material bonding anti-rotation lock: ID 202264-86; tightening torque: 1 Nm ±0.1 Nm
- 8 = Clamping surface
- 9 = Contact surface of slot
- 10 = Possible flange fastening with fastening kit (ID 1264352-xx); tightening torque: 1 Nm ±0.1 Nm; pay attention to the orientation of the flat!
- 11 = Possible centering hole
- 12 = 15-pin header
- 13 = Dimension for JH standard cable
- 14 = Ensure installation space for cable
- 15 = Distance to cover; note the opening for header, header connector, and wires 16 = Undercut
- 17 = Coupling surface of ECN/EQN
- 70

mm ____⊕ Tolerancing ISO 8015 ISO 2768 - m H 6 mm: ±0.2 mm

	Singleturn
	ECI 1119
Interface	EnDat 2.2
Ordering designation	EnDat22
Position values per rev.	524288 (19 bits)
Revolutions	-
Calculation time t _{cal} Clock frequency	≤ 5 μs ≤ 16 MHz
System accuracy	±120"
Electrical connection	15-pin (with connection for external tem
Cable length	≤ 100 m
Supply voltage	DC 3.6 V to 14 V
Power consumption (maximum)	3.6 V: ≤ 0.65 W 14 V: ≤ 0.7 W
Current consumption (typical)	5 V: 95 mA (without load)
Shaft	Blind hollow shaft for axial clamping \varnothing 6
Shaft speed	≤ 15000 rpm
Moment of inertia of rotor	$0.2 \cdot 10^{-6} \text{ kgm}^2$
Permissible axial motion of measured shaft	±0.4 mm
Vibration 55 Hz to 2000 Hz Shock 6 ms	Stator: ≤ 400 m/s ² ; rotor: ≤ 600 m/s ² (El ≤ 2000 m/s ² (EN 60068-2-27)
Operating temperature	–40 °C to 110 °C
Protection EN 60529	IP00 when mounted ²⁾
Mass	≈ 0.04 kg
ID number	1164812-xx

¹⁾ Evaluation optimized for the KTY 84-130 temperature sensor (see *Temperature measurement in motors*) ²⁾ See Electromagnetic compatibility under General electrical information in the Interfaces of HEIDENHAIN Encoders brochure.


	Multitum
	EQI 1131
	4096 (12 bits)
nperature se	nsor) ¹⁾
	$3.6 V: \le 0.75 W$ 14 V: $\le 0.85 W$
	<i>5 V:</i> 115 mA
6 mm	
	≤ 12000 rpm
N 60068-2-6)
	1164813-xx

ECI/EBI 1100 series

Absolute rotary encoders

- Flange for axial mounting
- Blind hollow shaft
- Without integral bearing
- EBI 1135: multiturn functionality via battery-buffered revolution counter



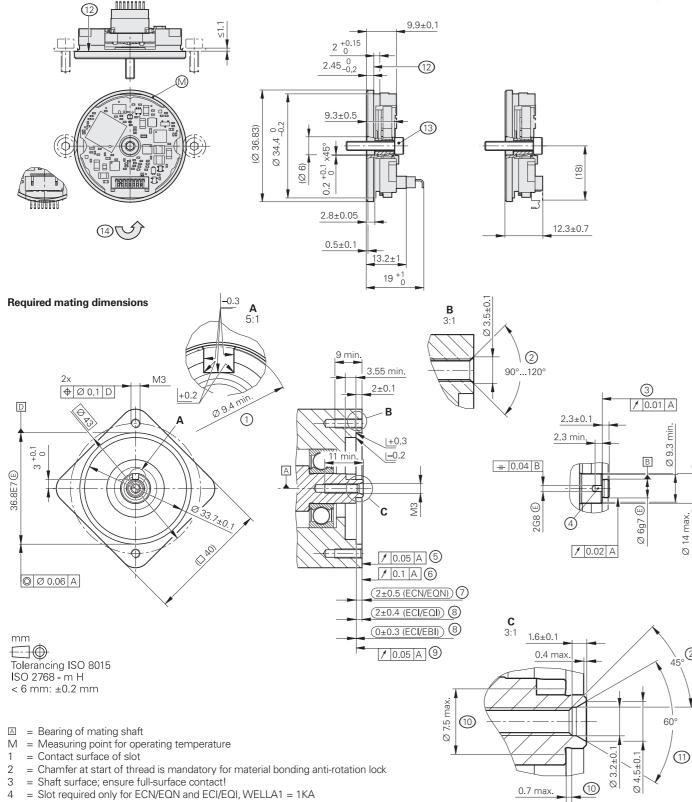

- 5 = Flange surface of ECI/EQI; ensure full-surface contact!
- = Coupling surface of ECN/EQN 6
- 7 = Maximum permissible deviation between the shaft surface and coupling surface; compensation of mounting tolerances and thermal expansion, of which ±0.15 mm of dynamic axial motion is permitted
- = Maximum permissible deviation between the shaft surface and flange surface; compensation of mounting tolerances and thermal expansion 8
- 9 = Flange surface of ECI/EBI; ensure full-surface contact!
- 10 = Undercut
- 11 = Possible centering hole
- 12 = Clamping surface
- 13 = Screw: ISO 4762 M3x16 8.8, with materially bonding anti-rotation lock; tightening torque: 1.15 Nm ±0.05 Nm
- 14 = Direction of shaft rotation for ascending position values
- 72

	Absolute
	ECI 1118
Interface	EnDat 2.2
Ordering designation	EnDat22 ¹⁾
Position values per rev.	262 144 (18 bits)
Revolutions	-
Calculation time t _{cal} Clock frequency	≤ 6 μs ≤ 8 MHz
System accuracy	±120"
Electrical connection	15-pin
Cable length	≤ 100 m
Supply voltage	DC 3.6 V to 14 V
Power consumption (maximum)	Normal operation at 3.6 V:0.52 W Normal operation at 14 V: 0.6 W
Current consumption (typical)	5 V: 80 mA (without load)
Shaft	Blind hollow shaft \varnothing 6 mm, axial clamping
Mech. permiss. shaft speed n	≤ 15000 rpm
Mech. permiss. acceleration	$\leq 10^5 \text{ rad/s}^2$
Moment of inertia of rotor	$0.2 \cdot 10^{-6} \text{ kgm}^2$
Permissible axial motion of measured shaft	±0.3 mm
Vibration 55 Hz to 2000 Hz Shock 6 ms	\leq 300 m/s ² (EN 60068-2-6) \leq 1000 m/s ² (EN 60068-2-27)
Operating temperature	–20 °C to 115 °C
Protection EN 60529	IP00 ⁴

Mass ≈ 0.02 kg **ID** number 728563-xx

 External temperature sensor and online diagnostics are not supported.
 Compliance with EnDat Specification 297403 and the EnDat Application Notes 722024, Chapter 13, Battery-buffered encoders, is required for correct control of the encoder.

³⁾ At T = 25 °C; $U_{BAT} = 3.6 V$

2


⁴⁾ See Electromagnetic compatibility under General electrical information in the Interfaces of HEIDENHAIN Encoders brochure.

	EBI 1135	
	262 144 (18 bits; 19-bit da LSB = 0)	ata word length with
	65536 (16 bits) ²⁾	
	Rotary encoder U _P : Backup battery U _{BAT} :	DC 3.6 V to 14 V DC 3.6 V to 5.25 V
	Normal operation at 5 V: Buffer mode ³⁾ :	80 mA (without load) 22 μA (rotating shaft) 12 μA (at standstill)
ing	I	
	≤ 12000 rpm	
	820725-xx	

ECI/EBI/EQI 1300 series

Absolute rotary encoders

- Mounting-compatible with photoelectric rotary encoders with a 07B stator coupling
- 0YA flange for axial mounting
- 44C blind hollow shaft Ø 12.7 mm
- Without integral bearing
- · Cost-optimized mating dimensions upon request

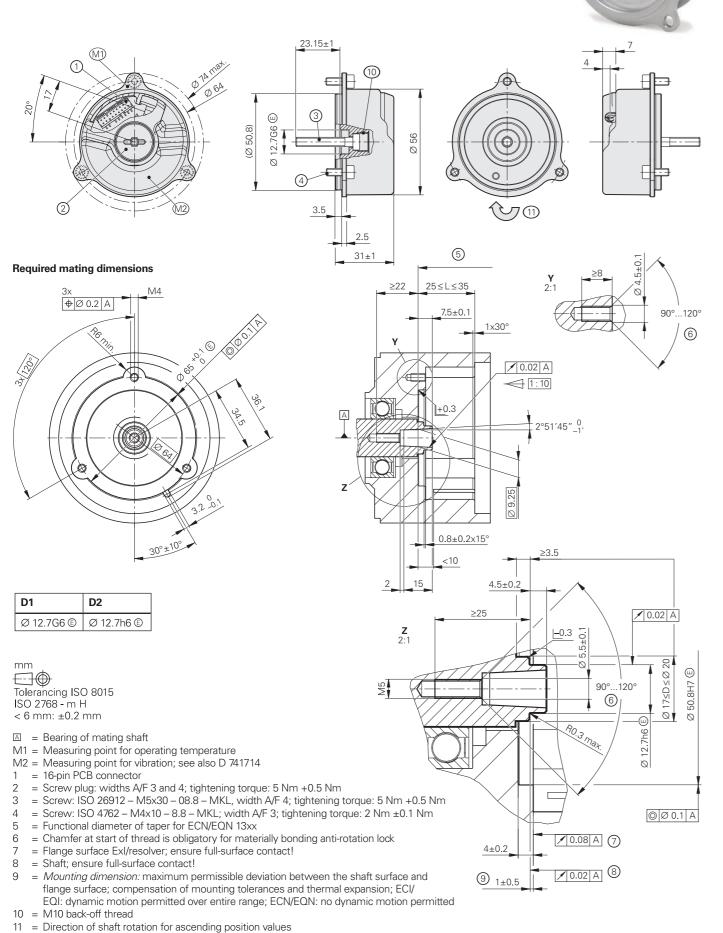

	Absolute	
	ECI 1319 Functional Safety	EQI 1
Interface	EnDat 2.2	
Ordering designation	EnDat22	
Position values per rev.	524288 (19 bits)	
Revolutions	-	4096
Elec. permiss. shaft speed/ deviations	≤ 15000 rpm (for continuous posi	tion val
Calculation time t _{cal} Clock frequency	≤ 5 μs ≤ 16 MHz	
System accuracy	±65″	
Electrical connection	16-pin with connection for temper	ature s
Cable length	≤ 100 m	
Supply voltage	DC 3.6 V to 14 V	
Power consumption (maximum)	3.6 V: ≤ 0.65 W 14 V: ≤ 0.7 W	3.6 V: 14 V:
Current consumption (typical)	5 V: 95 mA (without load)	<i>5 V:</i> 1
Shaft	Blind hollow shaft for axial clampir	ng Ø 12
Mech. permiss. shaft speed n	≤ 15000 rpm	≤ 120
Moment of inertia of rotor	$2.6 \cdot 10^{-6} \text{ kgm}^2$	I
Permissible axial motion of measured shaft	±0.5 mm	
Vibration 55 Hz to 2000 Hz Shock 6 ms	Stator: ≤ 400 m/s ² ; rotor: ≤ 600 m ≤ 2000 m/s ² (EN 60068-2-27)	n/s ² (EN
Operating temperature	–40 °C to 115 °C	
Trigger threshold of temperature exceedance error message	130 °C (measuring accuracy of the	e interr
Protection EN 60529	IP20 when mounted	
Mass	≈ 0.13 kg	
ID number	810661-xx	81066
¹⁾ Evaluation optimized for KTY 8	34-130	

²⁾ At T = 25 °C; U_{BAT} = 3.6 V

³⁾ Compliance with EnDat Specification 297403 and the EnDat Application Notes 722024, Chapter 13, Battery-buffered encoders, is required for correct control of the encoder

For dimensions and specifications of encoders with functional safety, see the Product Information document.

- 74

1331	Functional Safety
------	----------------------




96 (12 bits)	65536 (16 bits) ³⁾
/alue)	
e sensor ¹⁾	
	Rotary encoder U _P : DC 3.6 V to 14 V Backup battery U _{BAT} : DC 3.6 V to 5.25 V
V: ≤ 0.75 W V: ≤ 0.85 W	$3.6 V \le 0.65 W$ 14 V $\le 0.7 W$
115 mA (without load)	Normal operation at 5 V: 95 mA (without load) Backup battery: 160 μA (rotating shaft) ²⁾ 16 μA (at standstill)
12.7 mm	·
2000 rpm	
EN 60068-2-6)	
rnal temperature sensor: ±1 K)
662-xx	1230275-xx

ECI 1319, EQI 1331


Rotary encoders for absolute position values with safe singleturn information


- Robust inductive scanning principle
- · Mounting-compatible with photoelectric rotary encoders with a 07B stator coupling
- 0YA mounting flange
- Blind hollow shaft for axial clamping Ø 12.7 mm (44C) or Ø 12 mm (44A)
- Cost-optimized mating dimensions upon request

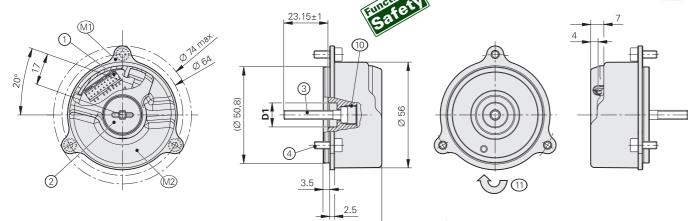

A







mm

Tolerancing ISO 8015 ISO 2768 - m H < 6 mm: ±0.2 mm

- = Bearing of mating shaft
- M1 = Measuring point for operating temperature
- M2 = Measuring point for vibration; see also D 741714
- 1 = 16-pin (12+4-pin) PCB connector
- a Screw plug: widths A/F 3 and 4; tightening torque: 5 Nm +0.5 Nm
 a Screw: DIN 6912 M5x30 08.8 MKL, width A/F 4; tightening torque: 5 Nm +0.5 Nm
- = Screw: ISO 4762 M4x10 8.8 MKL, width A/F 3, tightening torque: 2 Nm ±0.1 Nm 4
- 5 = Functional diameter of taper for ECN/EQN 13xx
- 6 = Chamfer at start of thread is obligatory for material bonding anti-rotation lock
- 7 = Exl/resolver flange surface; ensure full-surface contact!
- 8 = Shaft surface; ensure full-surface contact!
- 9 = Mounting clearance between shaft surface and flange surface; compensation of mounting tolerances and thermal expansion; ECI/EQI: dynamic motion permitted over entire range; ECN/EQN: no dynamic motion permitted
- 10 = M10 back-off thread
- 11 = Direction of shaft rotation for ascending position values
- 5 31±1 ≥22 25≤L≤35 7.5±0.1 90°...120° 1x30° 6 γ 🖊 0.02 A 1:10 2°51′45″ 1 Ø 9.25 0.8±0.2×15° ≥3.5 <10 4.5±0.2 ≥25 🖊 0.02 A **Z** 2:1 -0.3 Ø 17≤D≤Ø 20 50.8H7 E 90°...120° **ຊ** Ξ 6 Ro -ØØ0.1 A / 0.08 A (7) 4±0.2

✓ 0.02 A 8

9 _{1±0.5}



	Absolute			
	ECI 1319 singleturn	Functional Safety	EQI 1331 multitum	Functional Safety
Interface	EnDat 3			
Ordering designation	E30-R2			
Position values per rev.	524288 (19 bits)			
Revolutions	-		4096 (12 bits)	
XEL.time HPFout data rate	≤ 11 μs at 12.5 Mbit/s ≤ 8.2 μs at 25 Mbit/s			
Propagation time ¹⁾	14 µs (typical)			
System accuracy	±65″			
Electrical connection	16-pin PCB connector (12+4; with separate connection option for external temperature sensor) ³⁾			
Cable length	<i>At 12.5 Mbit/s:</i> ≤ 100 m; <i>at 25 Mbit/s:</i> ≤ 40 m			
Supply voltage	DC 4 V to 14 V (recommended: 12 V)			
Power consumption ²⁾ (maximum)	$4 V: \le 0.85 W$ $14 V: \le 0.9 W$		4 V: ≤ 0.95 W 14 V: ≤ 1 W	
Current consumption (typical)	<i>12 V:</i> ≤ 45 mA (withou	it communication)	<i>12 V:</i> ≤ 50 mA (withou	t communication)
Shaft	Blind hollow shaft for axial clamping Ø 12.7 mm (44C) or Ø 12 mm (44A)			
Shaft speed	≤ 15000 rpm		≤ 12000 rpm	
Moment of inertia of rotor	$2.45 \cdot 10^{-6} \text{ kgm}^2$		$2.6 \cdot 10^{-6} \text{ kgm}^2$	
Angular acceleration of rotor	$\leq 1 \cdot 10^5 \text{ rad/s}^2$	$\leq 1 \cdot 10^5 \text{ rad/s}^2$		
Axial motion of measured shaft	≤ ±0.5 mm			
Vibration 55 Hz to 2000 Hz Shock 6 ms	Stator: ≤ 400 m/s ² ; rotor: ≤ 600 m/s ² (EN 60068-2-6) ≤ 2000 m/s ² (EN 60068-2-27)			
Operating temperature	-40 °C to 115 °C			
Trigger threshold of temperature exceedance error message	130 °C (measuring accuracy of the internal temperature sensor: ±1 K)			
Relative humidity	\leq 93% (40 °C/21 d as per EN 60068-2-78); condensation excluded			
Protection rating EN 60529	IP20			
Mass	≈ 0.13 kg			
ID number		1; 44A shaft: 1286377-06		1; 44A shaft: 1286378-06

¹⁾ See EnDat Application Notes

²⁾ See General electrical information in the Interfaces of HEIDENHAIN Encoders brochure or at www.heidenhain.com ³⁾ Evaluation optimized for the KTY 84-130 and PT 1000 (see *Temperature measurement in motors*)

Absolute

For dimensions and specifications of encoders with functional safety, see the Product Information document.

EQI 1331 multitum	
-------------------	--




377-06	44C shaft: 1286378-01; 44A shaft: 1286378-06

ECI/EQI 1300S series

Absolute rotary encoders

- Mounting-compatible with photoelectric rotary encoders with a 07B stator coupling
- 0YA flange for axial mounting
- 44C blind hollow shaft Ø 12.7 mm
- Without integral bearing
- · Cost-optimized mating dimensions upon request

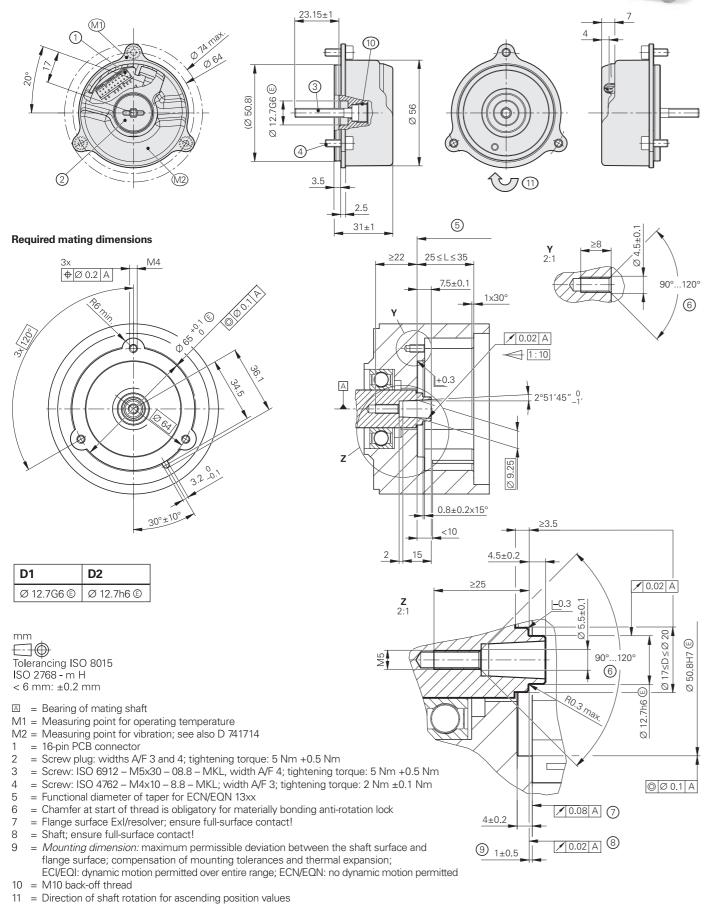

	Absolute
	ctional
	ECI 1319 S Safety
Interface	DRIVE-CLiQ
Ordering designation	DQ01
Position values per rev.	524288 (19 bits)
Revolutions	-
Calculation time TIME_MAX_ACTVAL	≤ 12 µs
System accuracy	±65"
Electrical connection	16-pin with connection for temperature
Cable length	≤ 40 m
Supply voltage	DC 24 V (10 V to 28.8 V; up to DC 36 V p
Power consumption (maximum)	$\begin{array}{l} 10 \ V_{:} \leq 1.1 \ W \\ 28.8 \ V_{:} \leq 1.25 \ W \end{array}$
Current consumption (typical)	24 V: 40 mA (without load)
Shaft	Blind hollow shaft for axial clamping \varnothing 1
Mech. permiss. shaft speed n	≤ 15000 rpm
Moment of inertia of rotor	$2.6 \cdot 10^{-6} \text{ kgm}^2$
Permissible axial motion of measured shaft	±0.5 mm
Vibration 55 Hz to 2000 Hz Shock 6 ms	Stator: ≤ 400 m/s ² ; rotor: ≤ 600 m/s ² (E ≤ 2000 m/s ² (EN 60068-2-27)
Operating temperature	–40 °C to 100 °C
Trigger threshold of temperature exceedance error message	120 °C (measuring accuracy of the inter
Protection EN 60529	IP20 when mounted
Mass	≈ 0.13 kg
ID number	1222049-xx
1)	

¹⁾ Evaluation optimized for the KTY 84-130 and PT 1000 (see *Temperature measurement in motors*) For dimensions and specifications of encoders with functional safety, see the Product Information document. DRIVE-CLiQ is a registered trademark of Siemens AG.

EQI	1331 S	Functional Safety
EQI	13315	Safet

4096 (12 bits)

sensor

possible without impairing the functional safety) $10 V \le 1.2 W$ *28.8 V:* ≤ 1.35 W 24 V: 45 mA (without load) 12.7 mm ≤ 12000 rpm

EN 60068-2-6)


rnal temperature sensor: ±1 K)

1222051-xx

ECI/EBI 100 series

Absolute rotary encoders

- Flange for axial mounting
- Hollow through shaft
- Without integral bearing
- EBI 135: multiturn functionality via battery-buffered revolution counter

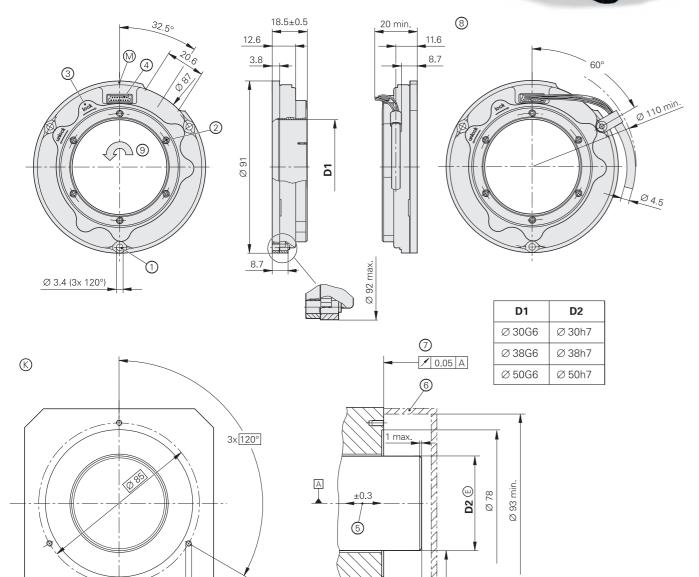

ZZ 77

20 min.

🖊 0.05 A



Tolerancing ISO 8015 ISO 2768 - m H < 6 mm: ±0.2 mm

- Bearing of mating shaft
- © = Required mating dimensions
- M = Measuring point for operating temperature
- 1 = Cylinder head screw: ISO 4762-M3, with three ISO 7092 washers; tightening torque: 0.9 Nm ±0.05 Nm
- $2 = \text{Width A/F 2.0 (6x); tighten evenly crosswise with increasing tightening torque; final tightening torque: 0.5 Nm ±0.05 Nm$
- 3 = Shaft detent: for manner of functioning, see the mounting instructions

M3

- 4 = 15-pin PCB connector
- 5 = Compensation of mounting tolerances and thermal expansion; no dynamic motion

Зx

⊕Ø0.1 A

- 6 = Protection against contact as per EN 60529
- 7 = Required up to max. \emptyset 92 mm
- 8 = Required mounting frame for output cable with cable clamp (accessory); bending radius of connecting wires: at least R3 mm
- 9 = Direction of shaft rotation for ascending position values

	Absolute	
	ECI 119	
Interface*	EnDat 2.1	EnDat 2.2
Ordering designation	EnDat01	EnDat22 ¹⁾
Position values per rev.	524288 (19 bits)	1
Revolutions	-	
Elec. permiss. shaft speed/ deviations ³⁾	≤ 3000 rpm/±128 LSB ≤ 6000 rpm/±256 LSB	≤ 6000 rpm (f
Calculation time t _{cal} Clock frequency	≤ 8 µs ≤ 2 MHz	≤ 6 µs ≤ 16 MHz
Incremental signals	~ 1 V _{PP}	-
Line count	32	-
Cutoff frequency –3 dB	≥ 6 kHz (typical)	-
System accuracy	±90"	
Electrical connection	15-pin	15-pin with co
Cable length	≤ 100m	`
Supply voltage	DC 3.6 V to 14 V	
Power consumption (maximum)	3.6 V: ≤ 0.58 W 14 V: ≤ 0.7 W	Normal opera Normal opera
Current consumption (typical)	5 V: 80 mA (without load)	<i>5 V:</i> 75 mA (without load)
Shaft*	Hollow through shaft \emptyset :	= 30 mm, 38 m
Mech. permiss. shaft speed n	≤ 6000 rpm	
Moment of inertia of rotor	$\emptyset = 30 \text{ mm: } 64 \cdot 10^{-6} \text{ kgm}^2$ $\emptyset = 38 \text{ mm: } 58 \cdot 10^{-6} \text{ kgm}^2$ $\emptyset = 50 \text{ mm: } 64 \cdot 10^{-6} \text{ kgm}^2$	
Permissible axial motion of measured shaft	±0.3 mm	
Vibration 55 Hz to 2000 Hz Shock 6 ms	\leq 300 m/s ² (EN 60068- \leq 1000 m/s ² (EN 60068-	2-6) 2-27)
Operating temperature	–30 °C to 115 °C	
Protection EN 60529	IP20 when mounted ⁶⁾	
Mass	$\emptyset = 30 \text{ mm} \approx 0.19 \text{ kg}$ $\emptyset = 38 \text{ mm} \approx 0.16 \text{ kg}$ $\emptyset = 50 \text{ mm} \approx 0.14 \text{ kg}$	
ID number	823406-xx	823407-xx

* Please select when ordering

- ¹⁾ Valuation numbers are not supported
- ²⁾ Compliance with EnDat Specification 297403 and the EnDat Application Notes 722024, Chapter 13, Battery-buffered encoders,
- is required for correct control of the encoder
- ³⁾ Speed-dependent deviations between absolute and incremental signals
 ⁴⁾ Evaluation optimized for the KTY 84-130 (see *Temperature measurement in motors*)
- ⁵⁾ At T = 25 °C; $U_{BAT} = 3.6 V$
- ⁶⁾ See *Electromagnetic compatibility* under *General electrical information* in the *Interfaces of HEIDENHAIN Encoders* brochure.


	EDI 405	
	EBI 135	
	EnDat 2.2	
	EnDat22 ¹⁾	
	65536 (16 bits) ²⁾	
or continuo	ous position value)	
	_	
	_	
	4)	
onnection fo	or temperature sensor ⁴⁾	
	Rotary encoder U _P : Backup battery U _{BAT} :	DC 3.6 V to 14 V DC 3.6 V to 5.25 V
tion at 3.6 \ tion at 14 V.		
	Normal operation at 5 V: Buffer mode ⁵⁾ :	75 mA (without load) 25 μA (rotating shaft) 12 μA (at standstill)
ım, 50 mm	<u> </u>	
	823405-xx	

ECI 4010, EBI 4010, ECI 4090S

Rotary encoders for absolute position values

- Robust inductive scanning principle
- Hollow through shaft (Ø 90 mm)
- EBI 4010: multiturn functionality through battery-buffered revolution counter
- Consists of a scanning unit and scale drum



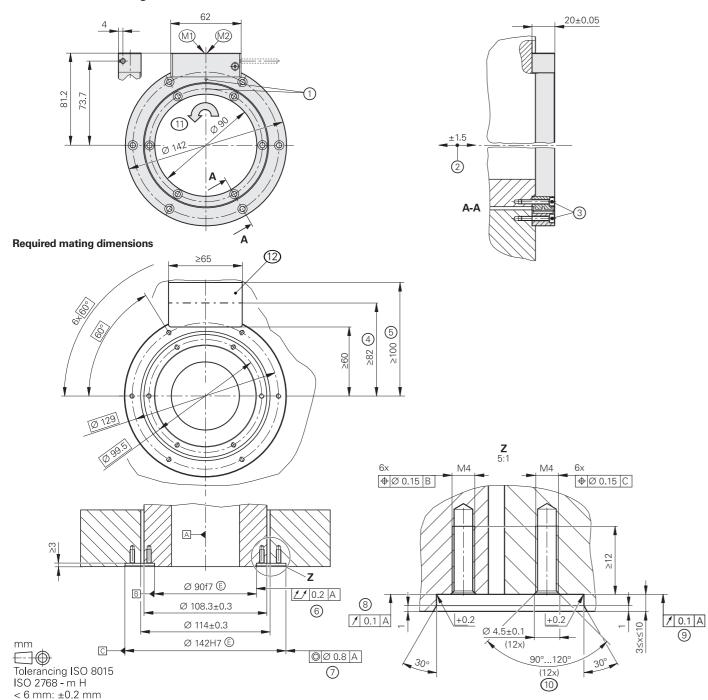

- \square = Bearing of mating shaft
- M1 = Measuring point for operating temperature on housing
- M2 = Measuring point for vibration on housing
- 1 = Position of zero point $\pm 5^{\circ}$
- 2 = Maximum permissible axial deviation between the shaft surface and flange surface;
- compensation of mounting tolerances and thermal expansion; dynamic motion permitted over entire range
- 3 = Use screws with material bonding anti-rotation lock: ISO 4762 M4 x 25 8.8 MKL as per DIN 267-27 (not included in delivery, ID 202264-88); tightening torque: 2.2 Nm ±0.13 Nm
- 4 = Space required when encoder cover is closed
- 5 = Space required for opening the encoder cover
- 6 = Total runout of mating shaft
- 7 = Coaxiality of stator mating surface
- 8 = Bearing surface of rotor
- 9 = Bearing surface of stator
- 10 = Chamfer at start of thread is mandatory for material bonding anti-rotation lock
- 11 = Direction of shaft rotation for ascending position values
- 12 = This area of the mating surface does not need to be fully covered by the scanning unit

Specifications	ECI 4010 singleturn Safety	EBI 4010 multitum	ECI 4090 S singleturn
Interface/ ordering designation	EnDat 2.2 / EnDat22	DRIVE-CLiQ / DQ01	
Position values per rev.	1048576 (20 bits)		1
Revolutions	-	65536 (16 bits)	-
Calculation time t _{cal} / clock frequency	≤ 5 µs/≤ 16 MHz		≤ 11 μs ¹⁾
System accuracy	±25″	-	
Electrical connection	15-pin with connection for tempe	erature sensor ²⁾	
Cable length	≤ 100 m		$\leq 40 \text{ m}^{3)}$
Supply voltage	DC 3.6 V to 14 V	Rotary encoder U _P : DC 3.6 V to 14 V Buffer battery U _{Bat} : DC 3.6 to 5.25 V	DC 24 V (10 V to 28.8 V); up to 36 V possible without impairing the functional safety
Power consumption ⁴⁾ (maximum)			$10 V: \le 1.1 W;$ $28.8 V: \le 1.25 W$
Current consumption (typical)	5 V: 95 mA (without load)	Normal operation at 5 V: 95 mA (without load) Buffer mode ⁵⁾ : 220 μA (rotating shaft) 25 μA (shaft at standstill)	24 V: 40 mA (without load)
Shaft	Hollow through shaft (Ø 90 mm)		
Shaft speed	≤ 6000 rpm		
Voment of inertia of rotor	$4.26 \cdot 10^{-4} \text{ kgm}^2$ (without screws)		
Angular acceleration of rotor	$\leq 2 \cdot 10^4 \text{ rad/s}^2$		
Axial motion of measured shaft	≤ ±1.5 mm		
Vibration 55 Hz to 2000 Hz Shock 6 ms	<i>AE scanning unit:</i> ≤ 400 m/s ² ; T ≤ 2000 m/s ² (EN 60068-2-27)	<i>TR scale drum:</i> ≤ 600 m/s ² (EN 6006	68-2-6)
Operating temperature	-40 °C to 115 °C (at the measuring point and on the entire scale drum)		-40 °C to 100 °C (at the measuring point and on the entire scale drum)
Trigger threshold of temperature exceedance error message	130 °C (measuring accuracy of th	120 °C (measuring accuracy of the internal temperature sensor: ±1 K)	
Protection EN 60529	Complete encoder, mounted: IP20 ⁶⁾ ; scanning unit: IP40 (read about insulation under Electrical safe in the Interfaces of HEIDENHAIN Encoders brochure)		
Mass	AE scanning unit: ≈ 0.27 kg; TTF	<i>scale drum:</i> ≈ 0.17 kg	
D number	AE ECI4010 scanning unit: ID 1130167-xx	AE EBI4010 scanning unit: ID 1130173-xx	AE ECI4090S scanning unit: ID 1130171-xx
	TTR EXI4000 scale drum: ID 1130175-xx		
1)			


¹⁾ Calculation time TIME_MAX_ACTVAL


- ²⁾ Evaluation optimized for the KTY 84-130, with DQ01 also for the PT 1000 (see *Temperature measurement in motors*)
- ³⁾ At an output cable length (inside motor) ≤ 1 m
- ⁴⁾ See *General electrical information* in the *Interfaces of HEIDENHAIN Encoders* brochure ⁵⁾ At T = 25 °C; U_{BAT} = 3.6 V
- ⁶⁾ The encoder must be protected from abrasive and harmful media in the application; use an appropriate enclosure as needed
- For dimensions and specifications of encoders with functional safety, see the Product Information document.

ECI 4010, EBI 4010, ECI 4090S

Rotary encoders for absolute position values

- Robust inductive scanning principle
- Hollow through shaft (Ø 180 mm)
- EBI 4010: multiturn functionality through battery-buffered revolution counter
- Consists of a scanning unit and scale drum

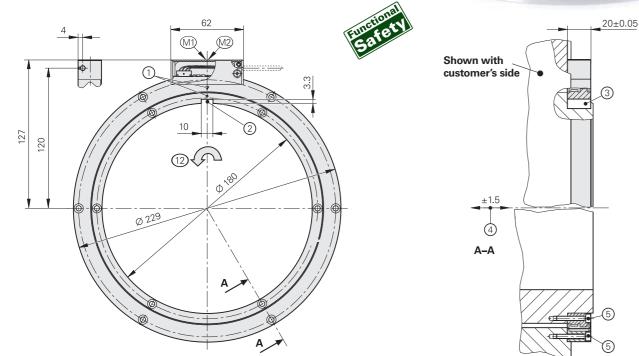

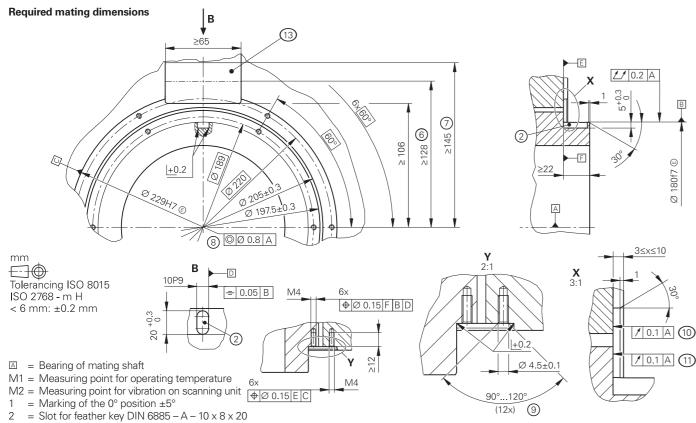

- 3 = Feather key DIN 6885 – A – 10 x 8 x 20
- = Maximum permissible axial deviation between the shaft surface and flange surface; 4
- compensation of mounting tolerances and thermal expansion; dynamic motion permitted over entire range
- = Fastening screws: ISO 4762 M4 x 25 8.8; tightening torque: 2.2 Nm ±0.13 Nm; a suitable anti-rotation lock must be used for the screw connection 5 (e.g., screw with material bonding anti-rotation lock: ISO 4762 - M4 x 25 - 8.8 MKL as per DIN 267-27, ID 202264-88)
- 6 = Space required when encoder cover is closed
- = Space required for opening the encoder cover
- 8 = Coaxiality of stator mating surface
- 9 = Chamfer at start of thread is mandatory for material bonding anti-rotation lock
- 10 = Bearing surface of stator
- 11 = Bearing surface of rotor
- 12 = Direction of shaft rotation for ascending position values
- 13 = This area of the mating surface does not need to be fully covered by the scanning unit

Specifications ECI 4010 EBI Safety singleturn mu Interface/ EnDat 2.2 / EnDat22 ordering designation Position values per rev. 1048576 (20 bits) 6553 Revolutions Calculation time t_{cal}/ ≤ 5 µs/≤ 16 MHz clock frequency System accuracy ±40" **Electrical connection** 15-pin with connection for temperature Cable length ≤ 100 m Rota Supply voltage DC 3.6 V to 14 V DC Buf DC Power consumption⁴ $3.6 V \le 0.63 W;$ (maximum) $14 V \le 0.7 W$ Current consumption (typical) 5 V: 95 mA (without load) Nor 95 r Buf 220 25 L Shaft Hollow through shaft Ø 180 mm (with keyway) Shaft speed ≤ 6000 rpm 3.1 · 10⁻³ kgm² (without screws, without key) Moment of inertia of rotor $\leq 2 \cdot 10^4 \text{ rad/s}^2$ Angular acceleration of rotor ≤ ±1.5 mm Axial motion of measured shaft Vibration 55 Hz to 2000 Hz AE scanning unit: $\leq 400 \text{ m/s}^2$; TTR scale drum: $\leq 600 \text{ m/s}^2$ (EN 60068-2-6) $\leq 2000 \text{ m/s}^2$ (EN 60068-2-27) Shock 6 ms –40 °C to 115 °C **Operating temperature** (at the measuring point and on the entir Trigger threshold 130 °C (measuring accuracy of the intern of temperature exceedance error message Protection EN 60529 Complete encoder, mounted: IP20⁶⁾; sc in the Interfaces of HEIDENHAIN Encoders brochure) AE scanning unit: ≈ 0.39 kg; TTR scale drum: ≈ 0.33 kg Mass **ID** number AE ECI4010 scanning unit: AE E ID 1 ID 1087526-xx

Calculation time TIME_MAX_ACTVAL

- Evaluation optimized for the KTY 84-130, with DQ01 also for the PT 1000 (see Temperature measurement in motors)
- At an output cable length (inside motor) ≤ 1 m
- See General electrical information in the Interfaces of HEIDENHAIN Encoders brochure
- ⁵⁾ At T = 25 °C; $U_{BAT} = 3.6 V$
- ⁶⁾ The encoder must be protected from abrasive and harmful media in the application; Use an appropriate enclosure as needed.
- For dimensions and specifications of encoders with functional safety, see the Product Information document.

DRIVE-CLiQ is a registered trademark of Siemens AG.

4010 Ititum	ECI 4090 S singleturn Safety
	DRIVE-CLiQ / DQ01
536 (16 bits)	-
	≤ 11 μs ¹⁾
e sensor ²⁾	
	≤ 40 m ³⁾
tary encoder U _P : 3.6 V to 14 V ffer battery U _{Bat} : 3.6 to 5.25 V	DC 24 V (10 V to 28.8 V); up to 36 V possible without impairing the functional safety
	<i>10 V:</i> ≤ 1.1 W; <i>28.8 V:</i> ≤ 1.25 W
rmal operation at 5 V: mA (without load) ffer mode ⁵⁾ :) µA (rotating shaft) µA (shaft at standstill)	24 V: 40 mA (without load)

ire scale drum)	-40 °C to 100 °C (at the measuring point and on the entire scale drum)	
nal temperature sensor: ±1 K)	120 °C (measuring accuracy of the internal temperature sensor: ±1 K)	
canning unit: IP40 (read about insulation under Electrical safety		


EBI4010 scanning unit: 1097530-xx	AE ECI4090S scanning unit: ID 1087527-xx


TTR EXI4000 scale drum: ID 1113606-xx


ERO 1200 series


Incremental rotary encoders


- Flange for axial mounting
- Hollow through shaft
- Without integral bearing



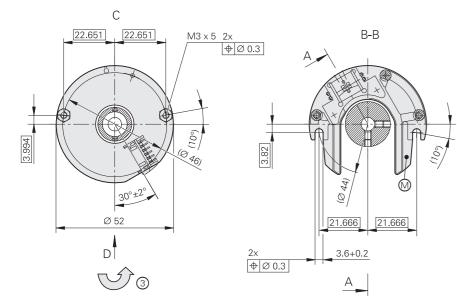

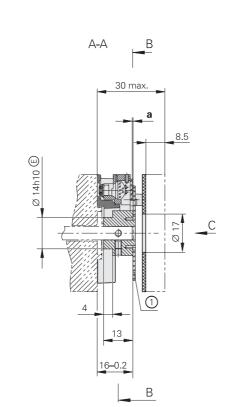





mm Tolerancing ISO 8015 ISO 2768 - m H

< 6 mm: ±0.2 mm

- Bearing of mating shaft
 Required mating dimensions
- M = Measuring point for operating temperature
- 1 = Disk/hub assembly
 2 = Offset screwdriver: ISO 2936 2.5 (I₂ shortened)

3 = Direction of shaft rotation for ascending position values

	Incremental
	ERO 1225
Interface	
Line count*	1024 2048
Accuracy of graduation ²⁾	±6″
Reference mark	One
Output frequency Edge separation <i>a</i> Cutoff frequency –3 dB	≤ 300 kHz ≥ 0.39 µs -
System accuracy ¹⁾	1024 lines: ±92" 2048 lines: ±73"
Electrical connection	12-pin
Supply voltage	DC 5 V ±0.5 V
Current consumption (without load)	≤ 150 mA
Shaft*	Hollow through shaft $\emptyset = 10 \text{ mm or } \emptyset$:
Moment of inertia of rotor	Shaft Ø 10 mm: 2.2 · 10 ⁻⁶ kgm ² Shaft Ø 12 mm: 2.2 · 10 ⁻⁶ kgm ²
Mech. permiss. shaft speed n	≤ 25000 rpm
Permissible axial motion of measured shaft	<i>1024 lines:</i> ±0.2 mm <i>2048 lines:</i> ±0.05 mm
Vibration 55 Hz to 2000 Hz Shock 6 ms	\leq 100 m/s ² (EN 60068-2-6) \leq 1000 m/s ² (EN 60068-2-27)
Operating temperature	–40 °C to 100 °C
Protection EN 60529	IP00
Mass	≈ 0.07 kg
ID number	1037521-xx (scanning unit) 332378-xx (disk/hub assembly)

* Please select when ordering

¹⁾ When not mounted; additional deviations due to mounting and bearing of the measured shaft are not taken into account
 ²⁾ For other errors, see *Measuring accuracy*

			Ø 12h6	Ð
	Z	а	f	С
ERO 1225	1024	0.4 ±0.2	0.05	Ø 0.02
	2048	0.2 ±0.05		
ERO 1285	1024 2048	0.2 ±0.03	0.03	Ø 0.02

D Ø 10h6 🖲


86


	ERO 1285
	~ 1 V _{PP}
	– – ≥ 180 kHz (typical)
	1024 lines: ±67" 2048 lines: ±60"
= 12 mm	
	±0.03 mm
	1037522-xx (scanning unit) 332378-xx (disk/hub assembly)

ERO 1400 series

Incremental rotary encoders

- Flange for axial mounting
- Hollow through shaft
- Without integral bearing; self-centering

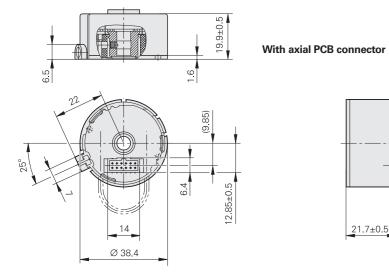





Ą



26.2±0.5

0.9±0.1






10 3


Axial PCB connector and ribbon cable

(II)



Axial PCB connector and round cable

mm Tolerancing ISO 8015 ISO 2768 - m H < 6 mm: ±0.2 mm



Bend radius R	Fixed cable	Frequent flexing
Ribbon cable	R≥2mm	R ≥ 10 mm
a	b	D

4.8±0.2

	а	b	D
ERO 1420	0.03	±0.1	Ø 4h6 ©
ERO 1470	0.02	±0.05	Ø 6h6 ©
ERO 1480			Ø 8h6 ©

	Incremental		
	ERO 1420	ERO 1470	
Interface			
Line count*	512 1000 1024	1000 1500	
Integrated interpolation*	-	5-fold	10-
Signal periods per rev.	512 1000 1024	5000 7500	10(15(
Edge separation a	≥ 0.39 µs	≥ 0.47 µs	≥ 0
Scanning frequency	≤ 300 kHz	≤ 100 kHz	
Cutoff frequency –3 dB	-	•	
Reference mark	One		
System accuracy ¹⁾	512 lines: ±139" 1000 lines: ± 1000 lines: ±112" 1000 lines: ± 1024 lines: ±112" 1500 lines: ±		
Electrical connection*	12-pin, axial ²⁾		
Supply voltage	DC 5 V ±0.5 V DC 5 V ±0.25 V		V
Current consumption (without load)	≤ 150 mA ≤ 155 mA		
Shaft*	Blind hollow shaft & or hollow through sha		
Moment of inertia of rotor	Shaft Ø 4 mm: 0.28 · 10 ⁻⁶ kgm ² Shaft Ø 6 mm: 0.27 · 10 ⁻⁶ kgm ² Shaft Ø 8 mm: 0.25 · 10 ⁻⁶ kgm ²		
Mech. permiss. shaft speed n	≤ 30000 rpm		
Permissible axial motion of measured shaft	±0.1 mm	±0.05 mm	
Vibration 55 Hz to 2000 Hz Shock 6 ms	≤ 100 m/s ² (EN 60068-2-6) ≤ 1000 m/s ² (EN 60068-2-27)		
Operating temperature	–10 °C to 70 °C		
Protection EN 60529	With PCB connector: IP00 With cable outlet: IP40		
Mass	≈ 0.07 kg		
ID number	360731-xx	360736-xx	
		-	

Bold: This preferred version is available on short notice

* Please select when ordering

¹⁾ When not mounted; additional deviations due to mounting and bearing of the measured shaft are not taken into account

²⁾ Upon request, cable (1 m), radial, free cable end (not for ERO 1470)

🛛 = Bearing	l of	mating	shaft
-------------	------	--------	-------

- © = Required mating dimensions
- \bigcirc = Accessory: round cable
- \square = Accessory: ribbon cable
- 1 = Two M3 setscrews offset by 90°; width A/F 1.5; tightening torque: 0.25 Nm ±0.05 Nm
- 2 = Version for repeated mounting
- 3 = Version featuring housing with central hole (accessory)
- 4 = Direction of shaft rotation for ascending position values


			ERO 1480
			~ 1 V _{PP}
			512 1000 1024
)-fold	20-fold	25-fold	-
0000 5000	20000 30000	25000 37500	512 1000 1024
0.22 µs	≥ 0.17 µs	≥ 0.07 µs	-
	≤ 62.5 kHz	≤ 100 kHz	-
			≥ 180 kHz
1			512 lines: ±190" 1000 lines: ±163" 1024 lines: ±163"
			DC 5 V ±0.5 V
	≤ 200 mA		≤ 150 mA
or Ø 8 mr bore (acce			
			360737-xx

TLITTL incremental signals


Interfaces \sim 1 V_{PP} incremental signals

HEIDENHAIN encoders with the \sim 1 V_{PP} interface provide voltage signals that are highly interpolatable.

The sinusoidal **incremental signals** A and B are phase-shifted by 90° elec. and have a typical amplitude of 1 V_{PP} The illustrated sequence of output signals—with B lagging A—applies to the direction of motion shown in the dimension drawing. The reference mark signal R has a unique assignment to the incremental signals. The output signal may be lower next to the reference mark.



For detailed descriptions of all available interfaces, as well as general electrical information, please refer to the *Interfaces* of HEIDENHAIN Encoders brochure.

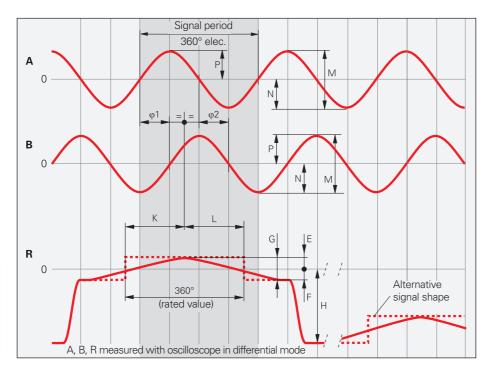

Pin layout

12-pin Ma	23 coupli	ng		15-pin D)-sub cor	nector fo	or PWM 2	21	12-pin F	PCB conn	ector			
	4 5						1 2 3 4 5 9 10 11 12	6 7 8 13 14 15	[12	1 2 3 4 5	b a a 6		
	Power supply					Incremental signals					Othe	Other signals		
	12	2	10	11	5	6	8	1	3	4	9	7	/	
	4	12	2	10	1	9	3	11	14	7	5/6/8/15	13	/	
E 12	2a	2b	1a	1b	6b	6a	5b	5a	4b	4a	3b	3a	/	
	U _P	Sensor ¹⁾	0V •	Sensor ¹⁾ 0∨	A+	A –	B+	В-	R+	R–	Vacant	Vacant	Vacant	
	Brown/ Green	Blue	White/ Green	White	Brown	Green	Gray	Pink	Red	Black	/	Violet	Yellow	


inside the	Output cable for ERN 1381 inside the motor housing ID 667343-01 Power supply			17-pin N flange s				6 10 11 11 11 11 11 11 11 11 11	-	PCB conn		b 1110 1110 1110 1110 1100 1100 1100 11	
		Power supply 7 1 10					Incremen	tal signals	S		Other sig		gnals
	7	1	10 4			16	12	13	3	2	5	6	8/9/11/ 14/17
E 12	2a	2a 2b 1a 1b			6b	6a	5b	5a	4b	4a	/	/	3a/3b
	U _P	Sensor UP	0∨ ●	Sensor 0V	A+	A–	B+	B-	R+	R–	T+ ²⁾	T– ²⁾	Vacant
	Brown/ Green	rown/ Blue White/ White		Brown	Green	Gray	Pink	Red	Black	Brown ²⁾	White ²⁾	/	

Cable shield connecting with housing; U_P = Power supply voltage ¹⁾ LIDA 2xx: vacant; ²⁾ For connecting a temperature sensor Sensor: The sense line is connected in the encoder with the corresponding power line. Vacant pins or wires must not be used!

HEIDENHAIN encoders with the CLITTL interface incorporate electronics that digitize sinusoidal scanning signals with or without interpolation.

The incremental signals are transmitted as the square-wave pulse trains U_{a1} and U_{a2} , phase-shifted by 90° elec. The **reference** mark signal consists of one or more reference pulses U_{a0} , which are gated with the incremental signals. In addition, the integrated electronics produce their **inverted signals** $\overline{U_{a1}}$, $\overline{U_{a2}}$, and $\overline{U_{a0}}$ for noise-proof transmission. The illustrated sequence of output signals—with Ua2 lagging Ua1 applies to the direction of motion shown in the dimension drawing.

The fault detection signal $\overline{U_{aS}}$ indicates malfunctions such as an interruption in the supply lines, failure of the light source, etc.

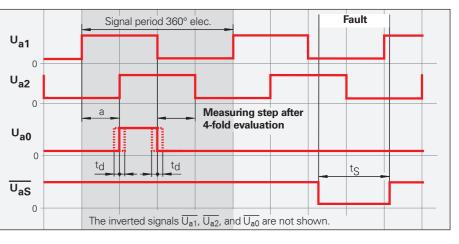

The distance between two successive edges of the incremental signals U_{a1} and U_{a2} through 1-fold, 2-fold, or 4-fold evaluation is one measuring step.

Pin lavout

	2-pin A23 flange socket or coupling						12-pin M23 connector						
	15-pin D-sub connector for IK 215 / PWM 21								ector E 12	2		1 2 3 4 5 6	b a
		Power	supply				Incremental signals Other signals						
	12	2	10	11	5	6	8	1	3	4	7	/	9
	4	12	2	10	1	9	3	11	14	7	13	5/6/8	15
E 12	2a	2b ¹⁾	1a	1b ¹⁾	6b	6a	5b	5a	4b	4a	3a	3b	/
•	U _P	Sensor U _P	0V •	Sensor 0 ∨	U _{a1}	U _{a1}	U _{a2}	U _{a2}	U _{a0}	U _{a0}	U _{aS} ¹⁾	Vacant	Vacant ²⁾
	Brown/ Green	Blue	White/ Green	White	Brown	Green	Gray	Pink	Red	Black	Violet	/	Yellow

Cable shield connected to housing; **U**_P = Power supply voltage **Sensor:** The sense line is connected in the encoder with the corresponding power line. Vacant pins or wires must not be used!

ERO 14xx: vacant

²⁾ Exposed linear encoders: conversion from TTL to 11 µAPP for the PWT, otherwise not assigned

Further information:

For detailed descriptions of all available interfaces, as well as general electrical information, please refer to the *Interfaces* of HEIDENHAIN Encoders brochure.

Commutation signals for block commutation

The block commutation signals U, V,

and W are obtained from three separate absolute tracks. They are transmitted as square-wave signals in TTL levels.

The ERN 1x23 and ERN 1326 are rotary

encoders with commutation signals for

block commutation.

Further information:

Detailed descriptions of all available interfaces, as well as general electrical information, can be found in the Interfaces of HEIDENHAIN Encoders brochure.

ERN 1123, ERN 1326 pin layout

17-pin M2 flange so			$ \begin{array}{c} 11 \bullet & 1 \\ 10 \bullet & 16 \bullet & 13 \bullet & 2 \\ 9 \bullet & 15 \bullet & 14 & \bullet & 3 \\ 8 \bullet & 17 \bullet & \bullet & 4 \\ 7 \bullet & 6 \bullet & 5 & 6 \end{array} $	-	connector		b a	15-pin PCB	connector 15 13 11 9 14 12 10 8	
		Power supply	y				Incremen	: tal signals		0 4 2
	7	1	10	11	15	16	12	13	3	2
• 16	1b	2b	1a	/	5b	5a	4b	4a	3b	3a
1 5	13	1	14	1	1	2	3	4	5	6
-	U _P	Sensor UP	0V	Internal shield	U _{a1}	U _{a1}	U _{a2}	U _{a2}	U _{a0}	U _{a0}
	Brown/ Green	Blue	White/ Green	/	Green/ Black	Yellow/ Black	Blue/ Black	Red/ Black	Red	Black

	Other signals											
	4	5	6	14	17	9	8					
• 16	2a	8b	8a	6b	6a	7b	7a					
• 15	/	7	8	9	10	11	12					
	$\overline{U_{aS}}$	U	Ū	V	V	W	W					
	White	Green	Brown	Yellow	Violet	Gray	Pink					

Pin layout for ERN 1023

Power	Power supply Incremental signals							Other signals					
UP	0 V	U _{a1}	$\overline{U_{a1}}$	U _{a2}	$\overline{U_{a2}}$	U _{a0}	U _{a0}	U	Ū	v	V	W	W
 White	Black	Red	Pink	Olive Green	Blue	Yellow	Orange	Beige	Brown	Green	Gray	Light Blue	Violet

Cable shield connected to housing; **U**_P = Power supply Vacant pins or wires must not be used!

Output c inside the	e motor	RN 1321		17-pin M23 fla	nge sock	et		12 12	12-pin I	PCB conr	nector			
00704	5.01			1 1 1 1 1 1 1				5 13 2 5 14 3 17 4 6 5		12		b b c c c c c c c c c c c c c c c c c c		
		Power	supply	Incremental signals					3			Other signals		
•	7	1	10	4	15	16	12	13	3	2	5	6	8/9/11/ 14/17	
E 12	2a	2b	1a	1b	6b	6a	5b	5a	4b	4a	/	/	3a/3b	
	U _P	Sensor UP	0V •	Sensor 0V	U _{a1}	U _{a1}	U _{a2}	U _{a2}	U _{a0}	U _{a0}	T + ¹⁾	T – ¹⁾	Vacan	
€	Brown/ Green	Blue	White/ Green	White	Brown	Green	Gray	Pink	Red	Black	Brown ¹⁾	White ¹⁾	/	

Cable shield connected to housing; U_P = Power supply voltage

Sensor: The sense line is connected in the encoder with the corresponding power line.

Vacant pins or wires must not be used!

¹⁾ Connections for an external temperature sensor (only for output cables inside the motor, see *Temperature measurement in motors*); if used, please refer to the information about electromagnetic compatibility in the General electrical information section of the Interfaces of HEIDENHAIN Encoders brochure.

Cable shield connected to housing; **U_P** = Power supply

Sensor: The sense line is connected in the encoder with the corresponding power line (only with ERN 1326). Vacant pins or wires must not be used!

Commutation signals for sine commutation

Position values EnDat 2.2

The commutation signals C and D are

obtained from the Z1 track and are equal to one sine or cosine period per revolution. They have a signal amplitude of 1 VPP (typical) at 1 kΩ.

The input circuit of the subsequent electronics is the same as that of the \sim 1 V_{PP} interface. However, the required terminating resistance Z_0 is 1 k Ω instead of 120 Ω.

The ERN 1387 is a rotary encoder with output signals for sinusoidal commutation.

Pin layout

(D) Further information:

Detailed descriptions of all available interfaces, as well as general electrical information, can be found in the Interfaces of HEIDENHAIN Encoders brochure.

17-pin M23 flang or couplir							11. 10° 16° 9° 15° 8° 17 7° 6	1 13 2	14-pin PC	B connecto	b lia lia
		Power	supply			Incremental signals					
	7	1	10	4	11	15	16	12	13	3	2
E	1b	7a	5b	3a	/	6b	2a	3b	5a	4b	4a
	U _P	Sensor UP	0 V •	Sensor 0 V	Internal shield	A+	A-	B+	B	R+	R–
	Brown/ Green	Blue	White/ Green	White	/	Green/ Black	Yellow/ Black	Blue/ Black	Red/ Black	Red	Black

		Other signals												
	14													
E	7b	1a	2b	6a	/	/								
	C+	C-	D+	D-	T+ ¹⁾	T – ¹⁾								
	Gray	Pink	Yellow	Violet	Green	Brown								

Cable shield connected to housing;

 U_P = Voltage supply; **T** = Temperature

Sensor: The sense line is connected internally to the respective the power line.

Vacant pins or wires must not be used!

1) Connections for an external temperature sensor (only for output cables inside the motor, see Temperature measurement in motors); if used, please refer to the information about electromagnetic compatibility in the General electrical information section of the

Interfaces of HEIDENHAIN Encoders brochure.


The EnDat interface is a digital, bidirectional interface for encoders. It is capable of outputting **position values**, reading information stored in the encoder, updating this information, and storing new information. Because the interface uses serial transmission, only four signal lines are required. The data (DATA) are transmitted in synchronism with the CLOCK signal from the subsequent electronics. The type of transmission (position values, parameters, diagnostics, etc.) is selected via mode commands that the subsequent electronics send to the encoder. Some functions are available only with EnDat 2.2 mode commands.


Ordering designation

EnDat01 EnDat H EnDat T	
EnDat21	
EnDat02	
EnDat22	

E30-R2

Versions of the EnDat interface

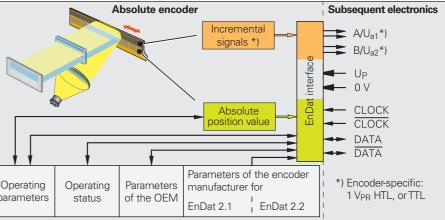

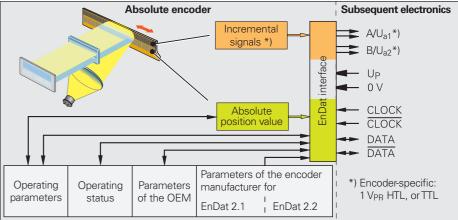

Pin layout for EnDat01/EnDat02

(D) Further information:

Detailed descriptions of all available

of HEIDENHAIN Encoders brochure.

interfaces, as well as general electrical

information, can be found in the Interfaces

17-pin M23 flang or couplin	ng						E	11 12 1 10° 16° 13° 2 9° 15° 14 8° 17° 4 7° 6° 5	3	12-pin PCB cor	1 1 1 1 1 1 1 1	15-pin PCB connector 15 13 11 9 7 5 3 1 14 12 10 8 6 4 2 1		
		Power	supply		Incremental signals ¹⁾					Se	erial data t	transmission		
	7	1	10	4	11	15	16	12	13	14	17	8	9	
E 12	1b	6 a	4b	3a	/	2a	5b	4a	3b	6b	1a	2b	5a	
E 15	13	11	14	12	/	1	2	3	4	7	8	9	10	
	U _P	Sensor UP	0V •	Sensor 0 ∨	Internal shield	A+	A –	B+	B-	DATA	DATA	CLOCK	CLOCK	
	Brown/ Green	Blue	White/ Green	White	/	Green/ Black	Yellow/ Black	Blue/ Black	Red/ Black	Gray	Pink	Violet	Yellow	

	Other	signals	
	5	6	
E 12	/	/	
E 15	/	/	
	T+ ²⁾	T – ²⁾	
	Brown ²⁾	White ²⁾	

Cable shield connected with housing; **U**_P = Power supply; **T** = Temperature Sensor: The sense line is connected in the encoder with the corresponding power line. Vacant pins or wires must not be used! ¹⁾ Only with the ordering designations EnDat 01 and EnDat 02 ²⁾ Connections for an external temperature sensor (only for output cables inside the motor, see *Temperature* measurement in motors); if used, please refer to the information about electromagnetic compatibility in the General electrical information section of the Interfaces of HEIDENHAIN Encoders brochure.

Command set	Incremental signals
EnDat 2.1 or EnDat 2.2	1 V _{PP} HTL TTL
	-
EnDat 2.2	1 V _{PP}
EnDat 2.2	-
EnDat 3.0	

EnDat22	pin layou	t									
8-pin M12 or flange	2 coupling socket				6 5 4 7 8 3 1 2 2		9-pin M23 angle flang	SpeedTEC ge socket		7 8 1 9 9 6 9 3 5 4	
16-pin PC	B connecto	r b a 4 4 4 4 1 2	3 4 5 6 8 9	E 16			15-pin PCE	connector	15 13 11 9 7 15 13 11 9 7 14 12 10 8 6		
	Power supply					Serial data transmission			Other signals		
💻 M12	8	2	5	1	3	4	7	6	/	/	
— M23	3	7	4	8	5	6	1	2	/	/	
• 16	1b	6a	4b	3a	6b	1a	2b	5a	8a	8b	
E 15	13	11	14	12	7	8	9	10	5	6	
•	U _P	Sensor ¹⁾	0 V •	Sensor ¹⁾ 0 V ²⁾	DATA	DATA	CLOCK	CLOCK	T+ ³⁾	T – ³⁾	
	Brown/ Green	Blue	White/ Green	White	Gray	Pink	Violet	Yellow	Brown	Green	

Cable shield connected with housing; U_P = Power supply; T = Temperature

Sensor: The sense line is connected in the encoder with the corresponding power line.

Vacant pins or wires must not be used!

¹⁾ U_{BAT} for EBI 1335; ²⁾ ECI 1118 EnDat22: vacant

³⁾ Connections for an external temperature sensor (only EnDat22, except ECI 1118, see *Temperature measurement in motors*); if used, please refer to the information about electromagnetic compatibility in the General electrical information section of the Interfaces of HEIDENHAIN Encoders brochure.

Pin layout for EBI 135/EBI 1135/EBI 4010

15-pin PCB co	onnector		E	15	15 13 11 9 7 5 3 14 12 10 8 6 4						
8-pin M12 flange socket						9-pin M23 angle flan	SpeedTEC ge socket			2 3	
		Power supply			Serial data transmission				Other signals ¹⁾		
■ 15	13	11	14	12	7	8	9	10	5	6	
■ M12	8	2	5	1	3	4	7	6	/	/	
— M23	3	7	4	8	5	6	1	2	/	/	
	UP	UBAT	0 V ²⁾	0 V _{BAT} 2)	DATA	DATA	CLOCK	CLOCK	T+ ³⁾	T– ³⁾	
¥	Brown/ Green	Blue	White/ Green	White	Gray	Pink	Violet	Yellow	Brown	Green	

U_P = Power supply; **U**_{BAT} = External buffer battery (false polarity can result in damage to the encoder)

Vacant pins or wires must not be used! ¹⁾ Only for EBI 135

²⁾ Connected inside encoder

³⁾ Connections for an external temperature sensor (see *Temperature measurement in motors*); if used, please refer to the information about electromagnetic compatibility in the General electrical information section of the Interfaces of HEIDENHAIN Encoders brochure.

SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH.

HMC 6 fl	ange socket	Ŀ				" Travel ra	38° ± 3° inge	2 *±3°	
16-pin PCB coni	nector			5		15-pin PCB connecto	15 13 11 9 7 0r 14 12 10 8		
	Encoder								
	Power	supply	Serial data transmission				Other	Other signals	
	1	2	3	4	5	6	/	1	
-									
E 16	1b	4b	6b	1a	2b	5a	8a	8b	
		4b 14	6b 7	1a 8	2b 9	5a 10	8a 5	8b 6	
E 16	1b								

	Motor	Motor										
	Bra	Brake Power										
-	7	8	A B C D E									
	BRAKE-	BRAKE+	U	V	W	/	PE					
€	White	White/Black	Blue	Brown	Black	/	Yellow/Green					

Outer shield of the encoder output cable on housing of communication element K. Vacant pins or wires must not be used!

HMC 6 is not suited for encoders with buffer battery backup (EBI 135, EBI 1335, EBI 1135, EBI 4010)


¹⁾ Connections for an external temperature sensor (except ECI 1118, see *Temperature measurement in motors*); if used, please refer to the information about electromagnetic compatibility in the General electrical information section of the Interfaces of HEIDENHAIN Encoders brochure.

HMC 2 (EnDat3/E30-R2) M12



EnDat 3 combines the features and benefits of EnDat in a new architecture and offers interesting enhanced functions for digital production. EnDat 3 requires two wires for communication, and usually two additional wires for encoder power. Since the digital data current has no DC component, it is possible to modulate the communication on the supply wires, and so to reduce the number of wires for certain applications (e.g., hybrid motor cables) to a total of just two wires (HMC 2). The EnDat 3 interface specification is oriented on the standardized OSI layer model.

The encoder side of the interface is referred to as the slave, and the subsequent electronics side as the master. A communication cycle consists of a request from the master followed by a response from the slave.



Find out more about EnDat at www.endat.de

Data Link Layer and BUS REQ HPF LPH LPF LPF Network Layer **Physical Layer**

47

Angle 16 bit MT

Foreground

and

Background

31

0

32 bit ST

BGD

Word 0

Word 1

Word 2

Ordering designations

Application

Layer

Transport

Layer

The ordering designation defines key communication characteristics:

Supported communication types	E30-R2	E30-R4	E30-RB
Communication modulated onto power supply wires	\checkmark	-	-
Communication + separate power supply wires (4 wires)	-	\checkmark	\checkmark
Bus operation	-	-	\checkmark
Sensor box integration	-	\checkmark	\checkmark

Pin layou	It of ECI, EQI 11xx	
	2 SpeedTEC nge socket	
	Encoder	
	Power supply,	/ Serial data transfer
— M12	А	
E 15	9	
2	-	
	P_SD+ ¹⁾	P_
	Violet	Y

	Motor						
	Br	ake	Power				
— M12	С	D	1	2	3	4	
	Brake +	Brake –	U	V	W	PE	

¹⁾ Power supply and data: P_SD+ includes U_P; P_SD- includes 0 V ²⁾ Connections for an external temperature sensor; evaluation optimized for KTY 84-130, PT 1000, and others; (see *Temperature*

section of the Interfaces of HEIDENHAIN Encoders brochure.

Vacant pins or wires must not be used!

SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH.

15-pin PCB connect 15 13 11 9 7 5 3 1 14 12 10 8 6 4 2	tor 15 — 2					
	Other signals					
В	/	/				
10	5	6				
-	2	1				
_ SD - ¹⁾	T+ ²⁾	T – ²⁾				
éllow	Brown	Green				
		· · · · · · · · · · · · · · · · · · ·				

measurement in motors); if used, please refer to the information about electromagnetic compatibility in the General electrical information

Pin layout of ECI, EQI, ECN, EQN 13xx

	B SpeedTEC Ingle flange socket M23	16-pin (12+4) PCB connector	1 2 1 2 1 2 1 2 1 2 1 2		
	Encoder				
	Power supply / S	erial data transfer	Other)ther signals	
— M23	А	В	/	1	
■ 12	2b	5a	1	1	
e 4	/	1	1a	1b	
2	/	1	2	1	
	P_SD+ ¹⁾	P_SD- ¹⁾	T + ²⁾	T – ²⁾	
	Violet	Yellow	Brown	Green	

	Motor							
	Br	ake	Power					
— M23	С	D	1	4	3	2		
	Brake +	Brake –	U	V	W	PE		

¹⁾ Supply voltage and data: P_SD+ contains U_P (power supply); P_SD– contains 0 V

²⁾ Connections for an external temperature sensor; evaluation optimized for KTY 84-130, PT 1000, and others (see *Temperature measurement in motors*); if used, please refer to the information about electromagnetic compatibility in the *General electrical information* section of the *Interfaces of HEIDENHAIN Encoders* brochure.

Vacant pins or wires must not be used!

SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH.

DRIVE-CLiQ interface

HEIDENHAIN encoders with the code letter S after the model designation are suitable for connection to Siemens controls with the **DRIVE-CLiO** interface

Ordering designation: DQ01

DRIVE-CLiQ is a registered trademark of Siemens AG.

Siemens pin layout for encoder cables (AGK)

8-pin M12 SPE flange socket	EDCON			4 3 2		SpeedTEC ge socket	=		8 1 9 2 9 3 5 4	
16-pin PCB co	nnector	b a		• ••	15-pin PC	B connecto	r			
		Power	supply	5 9	14 12 10 8 6 4 2 Serial data transmission Oth			i	er signals	
M12	8	2	1	5	3	4	7	6	1	1
M23	3	7	8	4	5	6	1	2	1	1
E 16	1b	6a	3a	4b	6b	1a	2b	5a	8a	8b
E 15	13	11	12	14	7	8	9	10	5	6
	-	-	UP	0V	RXP	RXN	ТХР	TXN	T + ¹⁾	T – ¹⁾
€ *	Brown/ Green	Blue	White	White/ Green	Gray	Pink	Violet	Yellow	Brown	Green

Cable shield connected to housing; $\mathbf{U}_{\mathbf{P}} = \text{Power supply voltage}$ Vacant pins or wires must not be used.

Output cables with a cable length > 0.5 m require strain relief for the cable


¹⁾ Connections for an external temperature sensor (see Temperature measurement in motors); if used, please refer to the information about electromagnetic compatibility in the General electrical information section of the Interfaces of HEIDENHAIN Encoders brochure.

Siemens pin layout for adapter cables (APK) and connecting cables (VBK)

RJ45 connecto	or 8-pii	n M12 connector	8-pin M12 o	oupling	9-pin M23 SpeedTEC connector			
				$ \begin{array}{c} 6 & 5 & 4 \\ 7 & \bullet & 3 \\ 1 & \bullet & 2 \end{array} $		$\begin{array}{c} 1 & 8 & 7 \\ 2 & 9 & 0 & 7 \\ 3 & 0 & 6 & 6 \\ 4 & 5 & 0 & 6 \\ 0 & 4 & 5 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 &$		
	Powe	rsupply		Serial data transfer				
F RJ45	А	В	3	6	1	2		
• • M12	1	5	7	6	3	4		
■ M23	8	4	1	2	5	6		
	U _P	0 V	ТХР	TXN	RXP	RXN		
€ *	Red	Black	Green	Yellow	Pink	Blue		

* Pay attention to the different color assignments of encoder cables compared to adapter cables and connecting cables

SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH. SPEEDCON is a registered trademark of Phoenix Contact GmbH & Co. KG.



For detailed descriptions of all available interfaces, as well as general electrical information, please refer to the *Interfaces of HEIDENHAIN Encoders* brochure.

EBI 1135/EBI 1335/EBI 135/EBI 4010: external backup battery

SSI position values

The multitum functionality of the EBI 1135, EBI 1335, EBI 135, and EBI 4000 is implemented by means of a revolution counter. In order for the absolute position information to still be available after loss of power, the EBI must be operated with an external backup battery.

A lithium thionyl chloride battery with 3.6 V and 1200 mAh is recommended for the backup battery. The typical battery service life is over nine years (EBI 1135/135) or six years (EBI 4010, EBI 1335) under the right conditions (two ten-hour shifts under normal operation, battery temperature of 25 °C, and typical self-discharging). In order for this to be achieved, the main power supply (U_P) must be connected to the encoder during or immediately after connection of the backup battery so that the encoder is fully initialized after being completely without power. Otherwise, the encoder will consume a significantly higher amount of battery current until main power is first supplied.

To avoid damage to the encoder, ensure the correct polarity of the backup battery. HEIDENHAIN recommends operating each encoder with its own backup battery.

If the application requires compliance with DIN EN 60086-4 or UL 1642, then an appropriate protective circuit is required for protection from wiring errors.


If the backup battery voltage falls below certain thresholds, the encoder issues the following warnings or error messages, which are transmitted over the EnDat interface:

- "Battery charge" warning ≤ 2.8 V ±0.2 V in normal operating mode
- "M Power interruption" error message
 ≤ 2.2 V ±0.2 V
 in battery buffered mode (appeder must
- in battery-buffered mode (encoder must be re-referenced)


Low battery current continues to flow even during normal operation of the EBI. The amount of current depends on the operating temperature.

Please note:


Compliance with EnDat Specification 297403 and the EnDat Application Notes 722024, Chapter 13, *Battery-buffered encoders*, is required for correct control of the encoder.

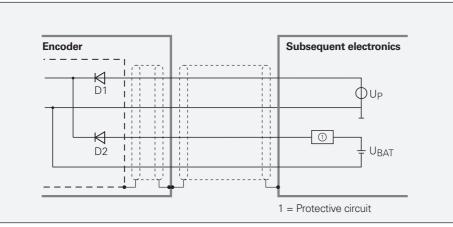

Backup battery connection

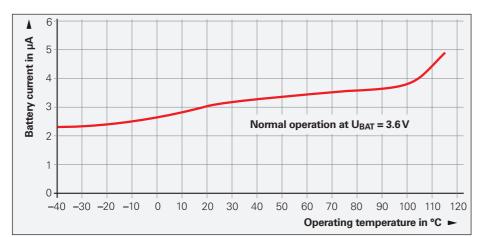

EBI 1135/135: typical discharge current during normal operation (U_B = 3.6 V)

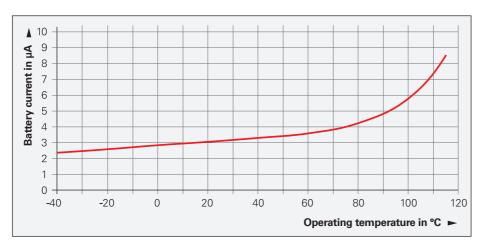

EBI 4010: typical discharge current during normal operation (U_{BAT} = 3.6 V)

The **position value** is transmitted, starting with the most significant bit (MSB), over the data lines (DATA) in synchronism with a clock signal (CLOCK) provided by the control. The SSI standard data word length for singleturn encoders is 13 bits, and for multiturn encoders, 25 bits. In addition to the absolute position values, **incremental signals** can transmitted as well. For a description of the signals, see 1 V_{PP} incremental signals.

The following **functions** can be activated via programming inputs:

- Direction of rotation
- Zeroing (setting to zero)

Data transmission

T = 1 to 10 μ s

Further information: For detailed descriptions of all available


For detailed descriptions of all available interfaces, as well as general electrical information, please refer to the *Interfaces* of *HEIDENHAIN Encoders* brochure.

Pin layout

17-pin M23 coupling							9 15 14 7 6	•3 •4							
		Power	supply				ncremen	tal signal	S	Ser	ial data	transmis	sion	Other s	signals
-	7	1	10	4	11	15	16	12	13	14	17	8	9	2	5
	U _P	Sensor UP	0V •	Sensor 0 ∨	Internal shield ¹⁾	A+	A–	B+	В-	DATA	DATA	CLOCK	CLOCK	Dir. of rotation	Zeroing
	Brown/ Green	Blue	White/ Green	White	/	Green/ Black	Yellow/ Black	Blue/ Black	Red/ Black	Gray	Pink	Violet	Yellow	Black	Green

Shield on housing; UP = Power supply voltage

Sensor: With a 5 V supply voltage, the sense line is connected in the encoder with the corresponding power line. ¹⁾ Vacant with the ECN/EQN 10xx and ROC/ROQ 10xx

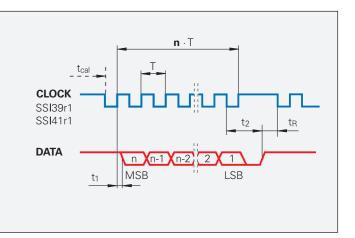

Cables and connecting elements

Output cables inside the motor housing

Output cables in Cable diameter: 4 with shrink-wrap	1.5 mm, 3.7 mm	n or TPE single wire	es	With PCB connector and 17-pin M23 angle flange socket, and wires for temperature sensor (cross-linked polyolefin 2 x 0.25 mm ²)	With PCB connector and 9-pin M23 angle flange socket, and wires for temperature sensor (TPE 2 x 0.16 mm ²)	With PCB connector and 8-pin M12 flange socket (TPE single wires with braided sleeve without shield), and wires for temperature sensor (TPE 2 x 0.16 mm ²)	With PCB connector and strippe unstripped cable end, and wires temperature sensor (TPE 2 x 0.1)
		1					
Rotary encoder	Interface	PCB connector	Crimp sleeve	With wires for temperature sensor \bigcirc	With wires for temp. sensor ①	With wires for temperature sensor $igidom{I}$	With wires for temperature sensor (
ECI 119	EnDat01	15-pin	-	-	-	-	640067-xx ¹⁾ EPG 16 x 0.06 mm ²
ECI 119	EnDat22	15-pin	-	-	$\begin{array}{c} 1120947 \text{-}xx^{11.4} \\ \text{EPG 1 x (4 x 0.06 mm^2) +} \end{array}$	-	825855-xx ¹⁾ EPG 4 x 2 x 0.16 mm ²
EBI 135 ⁶⁾	EnDat22	15-pin	-	-	4 x 0.06 mm ²	_	1116479-xx ¹⁾ ① EPG 1 x (4 x 0.06 mm ²) + 4 x 0.0
ECI 1119 EQI 1131	EnDat22	15-pin	-	-	-	1119952-xx ① TPE 8 x 0.16 mm ²	1119958-xx ① TPE 8 x 0.16 mm ²
ECI 1119 EQI 1131	EnDat3 (E30-R2)	15-pin				1279930-xx ^{10) 12) 13)} ① ETFE 2 x 0.15 mm ²	1302347-xx ^{10) 13)} ① ETFE 2 x 0.15 mm ²
ECI 1118	EnDat22	15-pin	-	-	-	805320-xx TPE 6 x 0.16 mm ²	$735784-xx^{2}$ TPE 6 x 0.16 mm ²
EBI 1135 ⁶⁾	EnDat22	15-pin	-	-	-	804201-xx TPE 8 x 0.16 mm ²	$640055 - xx^{2}$ TPE 8 x 0.16 mm ²
ECI 1319 EQI 1331 EBI 1335 ⁶⁾ ECN 1325 EQN 1337	EnDat22	16-pin or 12-pin + 4-pin	Ø 6 mm	-	1120948-xx ⁴⁾ ① EPG 1 x (4 x 0.06 mm ²) + 4 x 0.06 mm ²	1117280-xx ① TPE 8 x 0.16 mm ²	1108076-xx ① EPG 1 x (4 x 0.06 mm ²) + 4 x 0.0 1100199-xx TPE 8 x 0.16 mm ² 1143830-xx ① TPE 8 x 0.16 mm ²
ECI 1319 EQI 1331	EnDat3 (E30-R2)	-	-		1275042-xx ^{10) 11)} ETFE 2 x 0.15 mm ²	-	1302701-xx ¹⁰⁾ ETFE 2 x 0.15 mm ²
ECN 1325 EQN 1337	Analog temp. sensor	4-pin	-		1302763-xx ⁹⁾ ① ETFE 2 x 0.15 mm ²	_	1302763-xx ⁹⁾ ① ETFE 2 x 0.15 mm ²
ECI 1319 S EQI 1331 S ECN 1324 S EQN 1336 S	DRIVE-CLiQ	16-pin or 12-pin + 4-pin	Ø 6 mm	-	$\begin{array}{ccc} 1120945 \text{-}xx^{4)} & \textcircled{\text{T}} \\ \text{EPG 2 x (2 x 0.06 mm^2)} + \\ 4 x 0.06 mm^2 \end{array}$	1181373-xx ⁵⁾	-
ECN 1113 EQN 1125	EnDat01	15-pin	Ø 4.5 mm	606079-xx ① EPG 16 x 0.06 mm ²	-	-	605090-xx EPG 16 x 0.06 mm ²
ECN 1123 EQN 1135	EnDat22	15-pin	Ø 4.5 mm	-	-	1117412-xx ① TPE 8 x 0.16 mm ²	1108078-xx ① EPG 1 x (4 x 0.06 mm ²) + 4 x 0.0
ECN 1123 S EQN 1135 S	DRIVE-CLiQ	15-pin	Ø 4.5 mm	-	-	1217143-xx ⁵⁾ (T) EPG 2 x (2 x 0.06 mm ²) + 4 x 0.06 mm ²	-
ECN 1313 EQN 1325	EnDat01	12-pin	Ø6mm	332201-xx ① EPG 16 x 0.06 mm ²	-	-	332202-xx EPG 16 x 0.06 mm ²

Attention: For output cables, electromagnetic compatibility must be ensured in the entire system. The shield connection must be implemented on the motor.

SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH.

¹⁾ With cable clamp for shield connection

2) Single wires in heat shrink tubing, without shield

- ³⁾ Note the max. temperature (see the *Interfaces of HEIDENHAIN* Encoders brochure)
- 4) SpeedTEC angle flange socket (male) with O-ring for vibration protection (for threaded connector with O-ring; for SpeedTEC connector, remove O-ring)
- ⁵⁾ EPG cable with one-sided shield connection

⁶⁾ Not suited for HMC 6, not supported by the TNC

⁷⁾ Connecting element must be suitable for the maximum data rate used
 ⁸⁾ Single wires without heat shrink tubing, without shield

- ⁹⁾ Single wires in heat shrink tubing, without shield, with connector,
- 2-pin only for temperature sensor 10) Twisted single wires, without shield
- ¹¹⁾ 8-pin M23 SpeedTEC angle flange socket without vibration O-ring ¹²⁾8-pin M12 SpeedTEC angle flange socket (male), bolt circle dia. 23.75 mm, without vibration O-ring
- ¹³⁾ With wires for temperature sensor (ETFE 2 \times 0.15 mm²) in heat shrink tubing

ipped or ires for < 0.16 mm ²)	With PCB connector and contact insert for HMC 6 hybrid connecting element, and wires for temperature sensor (TPE $2 \times 0.16 \text{ mm}^2$)
7)	
nsor (T)	With wires for temperature sensor $ar{\mathbb{O}}$
	-
	$\begin{array}{c} 1072652 - xx^{11} \\ \text{EPG 1 x } (4 \times 0.06 \text{ mm}^2) + 4 \times 0.06 \text{ mm}^2 \end{array}$
x 0.06 mm ²	-
	$\frac{1072652 \times x^{11}}{\text{EPG 1 x (4 x 0.06 mm^2)} + 4 x 0.06 mm^2}$
	-
	-
	-
x 0.06 mm ²	1035387-xx
	Not for EBI 1335
	-
	-
	-
x 0.06 mm ²	1035857-xx
	-
	-

Further information:

For more information about HMC 6 or HMC 2, refer to the respective Product Information document. For information about output cables inside the motor, please refer to the

Cables and Connectors brochure.

Output cables in Cable diameter: 4 with shrink-wrap	1.5 mm, 3.7 mm	n or TPE single wire	es	With PCB connector and 17-pin M23 angle flange socket, and wires for temperature sensor (cross-linked polyolefin 2 x 0.25 mm ²)	With PCB connector and 9-pin M23 angle flange socket, and wires for temperature sensor (TPE 2 x 0.16 mm ²)	With PCB connector and 8-pin M12 flange socket (TPE single wires with braided sleeve without shield), and wires for temperature sensor (TPE 2 x 0.16 mm ²)	With PCB connector and stripped unstripped cable end, and wires temperature sensor (TPE 2 x 0.7
Rotary encoder	Interface	PCB connector	Crimp sleeve	With wires for temperature sensor $ar{\mathbb{O}}$	With wires for temp. sensor T	With wires for temperature sensor ${f O}$	With wires for temperature sensor
ERN 1123	ΠL	15-pin	-	-	-	_	738976-xx ²⁾ TPE 14 x 0.16 mm ²
ERN 1321 ERN 1381	TTL 1V _{PP}	12-pin	Ø6mm	667343-xx ① EPG 16 x 0.06 mm ²	-	_	333276-xx EPG 16 x 0.06 mm ²
ERN 1326	TTL	16-pin	Ø6mm	-	-	_	341369-xx EPG 16 x 0.06 mm ²
ERN 1387	1 V _{PP}	14-pin	Ø6mm	332199-xx ① EPG 16 x 0.06 mm ²	-	_	332200-xx EPG 16 x 0.06 mm ²
ERO 1225 ERO 1285	TTL 1V _{PP}	12-pin	Ø 4.5 mm	-	-	_	372164-xx ¹⁾³⁾ PUR [4(2 x 0.05 mm ²) + (4 x 0.1
ERO 1420 ERO 1470 ERO 1480	TTL TTL 1 V _{PP}	12-pin	Ø 4.5 mm	-	-	_	346439-xx ¹⁾³⁾ PUR [4(2 x 0.05 mm ²) + (4 x 0.1
ECI 4010 EBI 4010 ⁵⁾	EnDat22	15-pin	Ø 4.5 mm	-	1121041-xx ⁴⁾ EPG 1 x (4 x 0.06 mm ²) + 4 x 0.06 mm ²	_	-
					1120940-xx ⁴⁾		
ECI 4090 S	DRIVE-CLiQ	15-pin	Ø 4.5 mm	-	1125408-xx ⁴⁾ EPG 2 x (2 x 0.06 mm ²) + 4 x 0.06 mm ²	_	-
					$\begin{array}{c} 1125403-xx^{4)} \\ \text{EPG } 2 \times (2 \times 0.06 \text{ mm}^2) + \\ 4 \times 0.06 \text{ mm}^2 \end{array}$		

Attention: For output cables, electromagnetic compatibility must be ensured in the entire system. The shield connection must be implemented on the motor.


¹⁾ With cable clamp for shield connection
 ²⁾ Single wires with heat shrink tubing, without shield
 ³⁾ Note the max. temperature (see the *Interfaces of HEIDENHAIN Encoders* brochure)
 ⁴⁾ O TERESTICATION (See The Interface)

 A) SpeedTEC angle flange socket (male) with O-ring for vibration protection (for threaded connector with O-ring; for SpeedTEC connector, remove O-ring)

⁵⁾ Not suited for HMC 6, not supported by the TNC
 ⁶⁾ Connecting element must be suitable for the maximum data rate used
 ⁷⁾ Single wires without heat shrink tubing, without shield

DRIVE-CLiQ is a registered trademark of Siemens AG. SpeedTEC is a registered trademark of TE Connectivity Industrial GmbH.

pped or es for 0.16 mm ²)	With PCB connector and contact insert for HMC 6 hybrid connecting element, and wires for temperature sensor (TPE $2 \times 0.16 \text{ mm}^2$)
6)	
- (6)	
or 🗇	With wires for temperature sensor ${f O}$
	-
	-
	-
	-
).16 mm ²)]	-
).16 mm ²)]	-
	-
	-



For more information about HMC 6, please refer to the HMC 6 Product Information document.

Diagnostics, and inspection and testing equipment

HEIDENHAIN encoders provide all of the information needed for commissioning, monitoring, and diagnostics. The type of information available depends on whether the encoder is incremental or absolute and on which interface is being used.

Incremental encoders have $1 V_{PB}$ TTL, or HTL interfaces. TTL and HTL encoders monitor their signal amplitudes internally and generate a simple fault detection signal. With $1 V_{PP}$ signals, an analysis of the output signals is possible only with external testing devices or through the expenditure of computation resources in the subsequent electronics (**analog diagnostic interface**).


Absolute encoders employ serial data transmission. Depending on the interface, additional 1 V_{PP} incremental signals can be output. The signals are extensively monitored within the encoder. The monitoring results (particularly valuation numbers) can be transmitted to the subsequent electronics along with the position values via the serial interface (**digital diagnostics interface**). The following information is available:

- Error message: position value is not
- Error message: position value is not reliable
- Warning: an internal functional limit of the encoder has been reached
- Valuation numbers:
- Detailed information on the encoder's function reserve
- Identical scaling for all HEIDENHAIN encoders
- Cyclic reading is possible

This enables the subsequent electronics to evaluate the current status of the encoder with little effort, even in Closed Loop mode.

For the analysis of these encoders, HEIDENHAIN offers the appropriate PWM inspection devices and PWT testing devices. Based on how these devices are integrated, a distinction is made between two types of diagnostics:

- Encoder diagnostics: the encoder is connected directly to the inspection or testing device, thereby enabling a detailed analysis of encoder functions.
- Monitoring mode: the PWM inspection device is interposed within the closed control loop (via suitable testing adapters as needed). This enables real-time diagnosis of the machine or equipment during operation. The available functions depend on the interface.

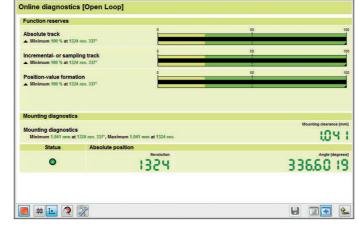






Commissioning with the PWM 21 and ATS software

PWT 101

The PWT 101 is a testing device for the functional testing and adjustment of incremental and absolute HEIDENHAIN encoders. Thanks to its compact dimensions and rugged design, the PWT 101 is ideal for portable use.






Serial 🔓	Display
Refresh E 985 More	Supply voltage
Action Pawer	Operating temperature

Dimensions

Protection EN 60529



Level display



PWT display

	PWT 101
	 EnDat Fanuc Serial Interface Mitsubishi high speed interface Panasonic Serial Interface Yaskawa Serial Interface 1 V_{PP} 11 µA_{PP} TTL
	4.3-inch color flat-panel display (touchscreen)
	DC 24 V Power consumption: max. 15 W
e	0 °C to 40 °C
	IP20
	≈ 145 mm × 85 mm × 35 mm

HEIDENHAIN

www.heidenhain.de

DE HEIDENHAIN Vertrieb Deutschland DK 83301 Traunreut, Deutschland © 08669 31-3132 ES FAX 08669 32-3132 E-Mail: hd@heidenhain.de HEIDENHAIN Technisches Büro Nord FI 12681 Berlin, Deutschland FI

 030 54705-240
 HEIDENHAIN Technisches Büro Mitte 07751 Jena, Deutschland
 03641 4728-250

HEIDENHAIN Technisches Büro West 44379 Dortmund, Deutschland 20231 618083-0

HEIDENHAIN Technisches Büro Südwest 70771 Leinfelden-Echterdingen, Deutschland © 0711 993395-0

HEIDENHAINTechnisches Büro Südost 83301 Traunreut, Deutschland © 08669 31-1337

AR NAKASE SRL. B1653AOX Villa Ballester, Argentina www.heidenhain.com.ar

AT HEIDENHAIN Techn. Büro Österreich 83301 Traunreut, Germany www.heidenhain.de

AU FCR MOTIONTECHNOLOGY PTY LTD Ravenhall Victoria 3023, Australia E-mail: sales@fcrmotion.com

BE HEIDENHAIN NV 1760 Roosdaal, Belgium www.heidenhain.be

BG ESD Bulgaria Ltd. Sofia 1172, Bulgaria www.esd.bg

BR HEIDENHAIN Brasil Ltda. 04763-070 – São Paulo – SP, Brazil www.heidenhain.com.br

BY GERTNER Service 220026 Minsk, Belarus www.heidenhain.by

CA HEIDENHAIN CORPORATION Mississauga, OntarioL5T2N2, Canada www.heidenhain.com

CH HEIDENHAIN (SCHWEIZ) AG 8603 Schwerzenbach, Switzerland www.heidenhain.ch

CN DR. JOHANNES HEIDENHAIN (CHINA) Co., Ltd. Beijing 101312, China www.heidenhain.com.cn

CZ HEIDENHAIN s.r.o. 102 00 Praha 10, Czech Republic www.heidenhain.cz

Denmark → **SE**

FARRESA ELECTROI 08028 Barcelona, Spa www.farresa.es HEIDENHAIN Scand

01740 Vantaa, Finland www.heidenhain.fi

FR HEIDENHAIN FRANC 92310 Sèvres, France www.heidenhain.fr

GB HEIDENHAIN (G.B.) Burgess Hill RH15 9R www.heidenhain.co.u

GR MB Milionis Vassilis 17341 Athens, Greece www.heidenhain.gr

HR Croatia → SLHU HEIDENHAIN Keresk

ID

IL

IN

1239 Budapest, Hung www.heidenhain.hu **PT Servitama Era Too** Jakarta 13930, Indone E-mail: ptset@group.g

NEUMO VARGUS M. Holon, 5885948, Israe E-mail: neumo@neum

HEIDENHAIN Optics India Private Limited Chetpet, Chennai 600 www.heidenhain.in

IT HEIDENHAIN ITALIA 20128 Milano, Italy www.heidenhain.it

JP HEIDENHAIN K.K. Tokyo 102-0083, Japa www.heidenhain.co.jj

KR HEIDENHAIN Korea L Anyang-si, Gyeonggi-d South Korea www.heidenhain.co.kr

MX HEIDENHAIN CORPO 20290 Aguascalientes E-mail: info@heidenha

MY ISOSERVE SDN. BHI 43200 Balakong, Selar E-mail: sales@isoserve

NL HEIDENHAIN NEDER 6716 BM Ede, Nether www.heidenhain.nl

NO HEIDENHAIN Scandi 7300 Orkanger, Norwa www.heidenhain.no

PWM 21

The PWM 21 phase angle measuring unit, in conjunction with the included ATS adjustment and testing software, provides an adjustment and testing package for the diagnosis and adjustment of HEIDENHAIN encoders.



For more information, see the *PWM 21, ATS Software* Product Information document.

Dimensions	258 mm × 154 mm × 55 mm
	ATS
Languages	German or English (selectable)
Functions	 Position display Connection dialog Diagnostics Mounting wizard for EBI/ECI/EQI, LIP 200, LIC 4000 and others Additional functions (if supported by the encoder) Memory contents
System requirements and recommendations	PC (dual-core processor > 2 GHz) RAM > 2 GB Operating systems: Windows 7, 8, and 10 (32-bit / 64-bit) 500 MB of free hard drive space

PWM 21

SSI

USB 2.0

• DRIVE-CLiQ

• Fanuc Serial Interface

Panasonic serial interface

HTL (via signal adapter)

AC 100 V to 240 V or DC 24 V

1 V_{PP}/TTL/11 μA_{PP}

• EnDat 2.1, EnDat 2.2, or EnDat 3 (absolute value with

or without incremental signals)

Mitsubishi high speed interfaceYaskawa Serial Interface

Encoder input

Interface

Supply voltage

DRIVE-CLiQ is a registered trademark of Siemens AG.

Vollständige und weitere Adressen siehe www.heidenhain.de For complete and further addresses see www.heidenhain.com

NICA S.A.	NZ	Llama ENGINEERING Ltd 5012 Wellington, New Zealand E-mail: info@llamaengineering.co.nz
ain	PH	MACHINEBANKS' CORPORATION Quezon City, Philippines 1113
inavia AB CE sarl	PL	E-mail: info@machinebanks.com APS 02-384 Warszawa, Poland www.heidenhain.pl
Limited	РТ	FARRESA ELECTRÓNICA, LDA. 4470 - 177 Maia, Portugal www.farresa.pt
D, United Kingdom Ik	RO	HEIDENHAIN Reprezentanță Romania Brașov, 500407, Romania www.heidenhain.ro
e	RS	Serbia → BG
cedelmi Képviselet	RU	GERTNER Service 119002 Moscow, Russian Federation www.heidenhain.ru
jary olsindo	SE	HEIDENHAIN Scandinavia AB 12739 Skärholmen, Sweden www.heidenhain.se
esia gts.co.id	SG	HEIDENHAIN PACIFIC PTE LTD Singapore 408593
IARKETING LTD.		www.heidenhain.com.sg
no-vargus.co.il	SK	KOPRETINA TN s.r.o. 91101 Trencin, Slovakia www.kopretina.sk
0 031, India	SL	NAVO d.o.o. 2000 Maribor, Slovenia www.heidenhain.si
NA S.r.I.	тн	HEIDENHAIN (THAILAND) LTD Bangkok 10250, Thailand www.heidenhain.co.th
n p Ltd.	TR	T&M Mühendislik San. ve Tic. LTD. ŞTİ. 34775 Y. Dudullu – Ümraniye-Istanbul, Turkey www.heidenhain.com.tr
do, 14087 kr	тw	HEIDENHAIN CO., LTD. Taichung 40768, Taiwan www.heidenhain.com.tw
ORATION MEXICO s, AGS., Mexico ain.com	UA	GERTNER Service 02094 Kiev, Ukraine www.heidenhain.ua
D. Ingor ie.com.my	US	HEIDENHAIN CORPORATION Schaumburg, IL 60173-5337, USA www.heidenhain.us
RLAND B.V. rlands	VN	AMS Co. Ltd HCM City, Vietnam
inavia AB ⁄ay	ZA	E-mail: davidgoh@amsvn.com MAFEMA SALES SERVICES C.C. Kyalami 1684, South Africa www.heidenhain.co.za